

BlueAnt X3Dmax Advanced Portable Speaker User Manual

Home » BlueAnt » BlueAnt X3Dmax Advanced Portable Speaker User Manual

Contents

- 1 BlueAnt X3Dmax Advanced Portable Speaker
- 2 Specifications
- 3 FAQs
- **4 WHAT INBOX**
- **5 FUNCTION**
- 6 Getting started
- 7 FCC
- 8 Documents / Resources
 - 8.1 References

BlueAnt

BlueAnt X3Dmax Advanced Portable Speaker



Specifications

• **Dimensions:** 145 x 240 mm

• Output Power: 20W

• Connectivity: Bluetooth, AUX

• Charging: USB-C Cable

FAQs

• Q: How do I charge the BlueAnt X3D MAX Portable Speaker?


• **A:** Use the provided USB-C cable and connect it to the CC charge slot on the speaker. Plug the other end into a PD charger for charging.

• Q: How do I know when the speaker is fully charged?

• **A:** The battery indicator will show when the speaker is fully charged. It is recommended to charge the speaker fully before use.

Welcome Thank you for purchasing the BlueAnt X3D MAX Portable Bluetooth Speaker. Please read through this manual to get the most out of your speaker.


WHAT INBOX

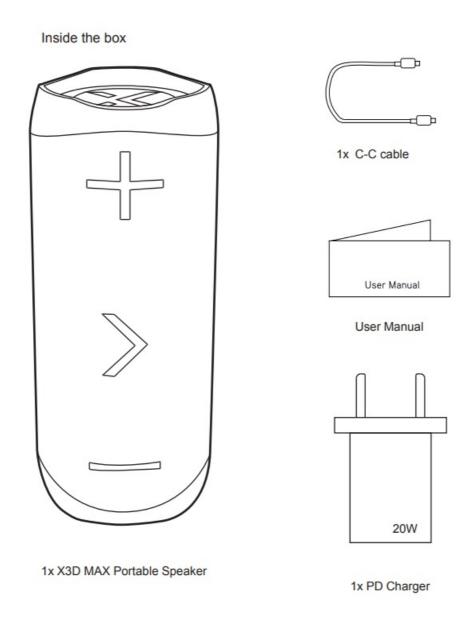


BlueAnt X3D MAX Portable Speaker 1 x USB-C Cable fast charger user manual

FUNCTION

Get to know your BlueAnt X3D MAX speaker

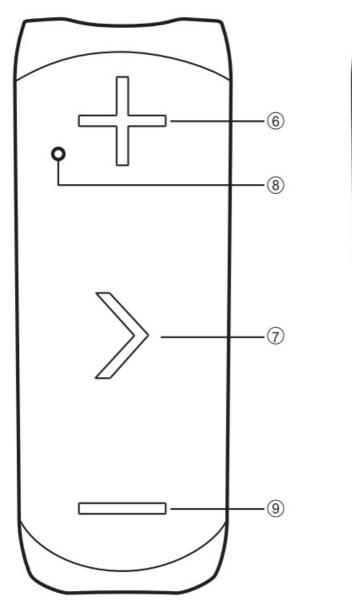

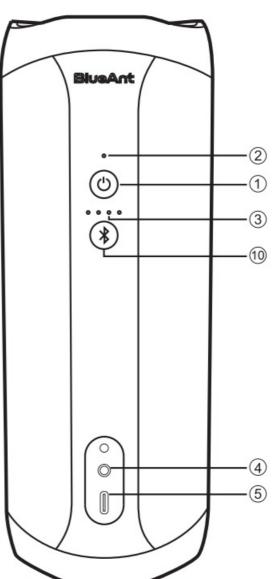

Item	Button	Function
1	(4)	Power button-Press 1.5 seconds to power on, short press to power off
2	۰	Bluetooth Indicator
3	0 0 0 0	Battery Indicator
4	0	AUX in Jack 3.5mm
5	0	C-C Charge slot - C-C cable supplied
6	4	Volume Up - Short press Skip forward button - Long press
7	>	Play/Pause button-Click to play/pause Double Click fr Siri/Google Click to answer/end, Double Click to reject call
8	0	Microphone
9		Volume Down - Short press Skip backward button - Long press
10	*	Press 1.5 secondds enter into bluetooth pairing ,hold press 1.5 seconds disconnect bluetooth .press 3 secounds enter into DUO MODE .Press 3 secounds disconnect DUO MODE under paring

Getting started

Power On/Off

• Hold the press button for 1.5 seconds to power on the speaker. Short press the button to power off the speaker. Each time the speaker powers on it will reset to 25 % volume. After 10 minutes with no connection, the BlueAnt X3DMAX will automatically power off to conserve battery.

Modes Bluetooth Mode

• A) Pairing


Power on the speaker and press
 button to enter into Bluetooth pairing. The light indicator will flash. On your smartphone search Bluetooth devices for the "BlueAnt X3D MAX". Once connected, the speaker will announce it is "connected" and the indicator light will cease flashing.

• B) Music

	Click to increase volume			
	Press and hold for 1.5 seconds to skip forward a track			
	Click to play/pause			
	Click to decrease volume			
	Press and hold for 1.5 seconds to skip back a track			
C) Calls				
	Click to answer an incoming call			
	Click to end the active call			
	Double click to reject an incoming call or press and hold			
D) Siri/Google				
	Double click to active/cancel Siri/Google voice dialing			
E) Disconnect				
	Press and hold for 1.5 sconds to			
	disconnect the current Bluetooth			
	connection.The BlueAnt X3D MAX will			
*				
	prompt"disconnected".Then other			
	Bluetooth devices can find and pair with			
	the BlueAnt X3D MAX			

• F) Duo Mode

• The BlueAnt X3D and BlueAnt X3D MAX can be paired to each other in Duo Mode



Press the power button on the first speaker to turn the speaker "On".

- 2. Press the button on the first speaker and enter into bluetooth mode. Press 3 seconds until the speaker says "Duo Mode pairing" then release the buttons.
- 3. Press the power button on the second speaker to turn the speaker "On".
- 4. Press the buttons to enter Bluetooth mode on the second speaker, and press 3 seconds until the speaker says "Duo Mode pairing" then release the buttons.
- 5. Please wait until one speaker says "Duo Mode connected". This may take up to 1 minute. The speakers are now connected.
- 6. The speaker that says"Duo Mode connected "is the master speaker and this is the speaker that you should pair with your phone.

For Bluetooth pairing, search for "BlueAnt X3D MAX" on your smartphone. If you receive a phone call while in Duo Mode, the call will only come through the master speaker When in Duo Mode and you power off one speaker, both speakers will power off. When you power on the speakers, they need to be turned on individually. When both speakers are powered on and enter into Bluetooth mode. Duo Mode will automatically reconnect and you will hear "Duo Mode connected"

· To disconnect Duo Mode, press and hold

until you hear "Duo Mode disconnected".

• To clear Duo Mode pairing, press and hold the speaker saying "Duo Mode cleared". This takes about 3 seconds. Assuming a direct line of sight, you should be able to achieve a range of over 30 meters between the two speakers. When used indoors the range will be affected by internal walls or obstacles between the speakers.

AUX in Mode

- Use a 3.5mm audio cable to connect the speaker to an audio source (PC, MP3/MP4, mobile phone).
- When you plug the AUX cable into the BlueAnt X3D MAX, it will automatically change to AUX in mode.
- When you unplug the AUX cable the BlueAnt X3D MAX will change back to Bluetooth mode. The speaker will play the music from the audio source

	Click to increase volume
>	Click to mute play back
	Click to decrease volume

• To change or control tracks, please use your music source when in AUX mode

Charging

Please use the supplied fast C-C charge cable and PD charger to charge the BlueAnt X3D MAX. A full charge
will take around 1.5 hours. Please close the port cover after you have charged the BlueAnt X3D MAX.

SPLASH PROOF - The BlueAnt BlueAnt X3D

 MAX features a splash-proof rating of IP67. The BlueAnt X3D MAX is only splashproof when the port cover is closed

FCC

FCC ID: VHFBLUEANTX3DM

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- 1. this device may not cause harmful interference, and
- 2. this device must accept any interference received, including interference that may cause undesired operation.

FCC Statement

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, under part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used by the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance 20cm between the radiator & your body.

IC Caution

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance. This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science, and Economic Development Canada's license-exempt RSS(s).

Operation is subject to the following two conditions:

- 1. This device may not cause interference.
- 2. This device must accept any interference, including interference that may cause undesired operation of the device.

This equipment should be installed and operated with a minumum distance of 20 cm between the radiator and your body.

Documents / Resources



<u>BlueAnt X3Dmax Advanced Portable Speaker</u> [pdf] User Manual X3Dmax Advanced Portable Speaker, X3Dmax, Advanced Portable Speaker, Portable Speaker, Speaker

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.