

## Linkind LS10008142

# Linkind Smart A19 RGBTW Light Bulb Instruction Manual (Model LS10008142)

Comprehensive guide for installation, operation, and maintenance of your Linkind Smart A19 RGBTW Light Bulbs.

[Introduction](#)

[Safety Information](#)

[Package Contents](#)

[Product Overview](#)

[Setup](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty & Support](#)

## 1. INTRODUCTION

Thank you for choosing Linkind Smart A19 RGBTW Light Bulbs. These smart bulbs offer advanced lighting control, including millions of colors, tunable white light, dimming capabilities, and smart home integration with Alexa and Google Home. This manual provides detailed instructions to help you set up and operate your new smart bulbs effectively.

## 2. SAFETY INFORMATION

Please read and follow all safety instructions carefully to ensure safe operation of your Linkind Smart Light Bulbs:

- **Indoor Use Only:** These bulbs are designed for indoor use in dry locations. Do not expose to water or moisture.
- **Proper Installation:** Ensure the power is off before installing or removing the bulb. Screw the bulb firmly into a suitable E26 base fixture.
- **Voltage Compatibility:** Use only with the specified voltage (120V AC, 60Hz).
- **No Dimmer Switches:** These smart bulbs are not compatible with traditional dimmer switches. Using them with dimmer switches may cause flickering, buzzing, or damage to the bulb. Smart dimming is controlled via the app or voice commands.
- **Avoid Enclosed Fixtures:** Do not use in fully enclosed luminaires as this may shorten the bulb's lifespan.
- **Operating Temperature:** Operate within the specified temperature range.
- **Disposal:** Dispose of electronic components responsibly according to local regulations.

### 3. PACKAGE CONTENTS

Your Linkind Smart A19 RGBTW Light Bulb package includes:

- Linkind Smart A19 RGBTW Light Bulbs (4-pack)
- Instruction Manual

### 4. PRODUCT OVERVIEW

The Linkind Smart A19 RGBTW Light Bulb offers a versatile lighting experience with its advanced features:

- **High Brightness:** 1100 Lumens (75W Equivalent) for bright illumination.
- **Full Color Spectrum:** 16 million colors to choose from.
- **Tunable White:** Adjustable white light from 1800K (warm) to 6500K (cool).
- **Dimmable:** Brightness adjustable from 1% to 100% via app or voice.
- **Connectivity:** Supports 2.4GHz Wi-Fi and Bluetooth for reliable control.
- **Smart Home Integration:** Compatible with Amazon Alexa and Google Home.
- **Music Sync:** Lights can synchronize with music.
- **Preset Scenes:** Over 100 preset lighting scenes for various moods and activities.
- **Long Lifespan:** Designed for a lifespan of 22 years (based on 3 hours/day usage).

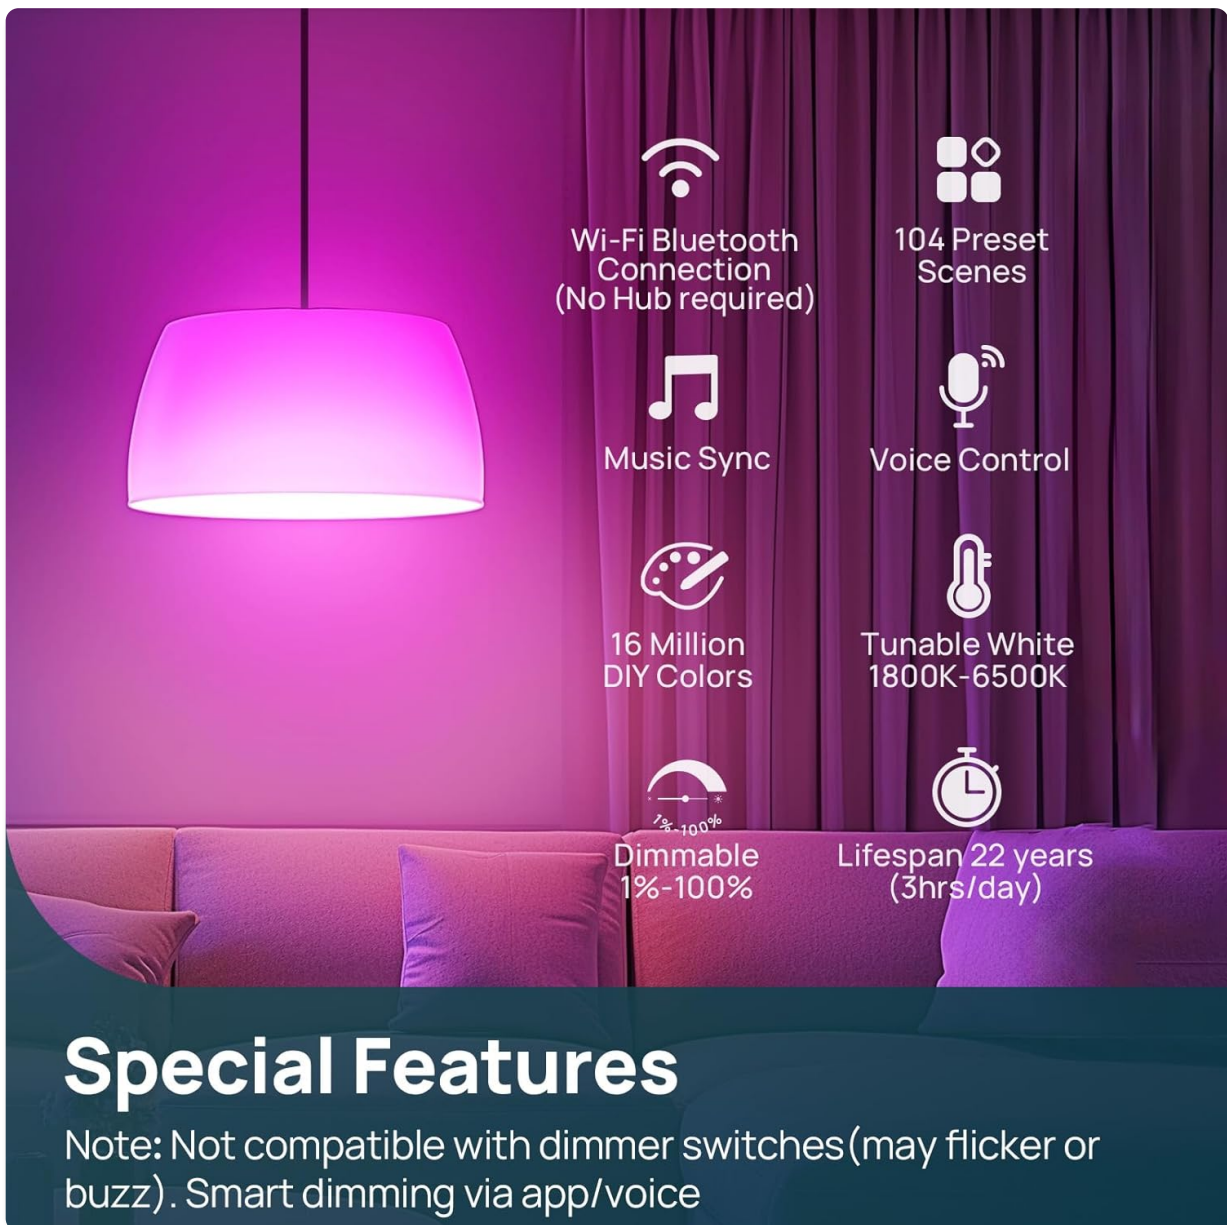


Image: Overview of Linkind Smart A19 RGBTW Light Bulb special features, including Wi-Fi & Bluetooth connection, 104 preset scenes, music sync, voice control, 16 million DIY colors, tunable white (1800K-6500K), dimmable (1%-100%), and a lifespan of 22 years.

## 5. SETUP

### 5.1 Physical Installation

1. Ensure the power to the light fixture is turned off at the switch.
2. Carefully screw the Linkind Smart A19 RGBTW Light Bulb into a standard E26 light socket.
3. Turn on the power to the light fixture. The bulb should light up.

### 5.2 AiDot App Installation

1. Download the AiDot app from the Apple App Store or Google Play Store.
2. Open the AiDot app and create an account or sign in if you already have one.

### 5.3 Connecting to the AiDot App

Before connecting, ensure your phone's Wi-Fi is set to 2.4GHz and Bluetooth is enabled.

1. In the AiDot app, tap the "+" icon in the top right corner.
2. Select "Add Device" and then choose "Nearby" to scan for devices.
3. The app will detect your Linkind Smart Bulb. Select it and tap "Next Step".
4. Choose your 2.4GHz Wi-Fi network and enter the password.
5. Wait for the connection process to complete. Once successful, you can rename your bulb and assign it to a room.

Your browser does not support the video tag.

Video: This video demonstrates the step-by-step process of connecting Linkind Smart Light Bulbs to the AiDot app, including physical installation, app download, device discovery, Wi-Fi connection, and initial control.

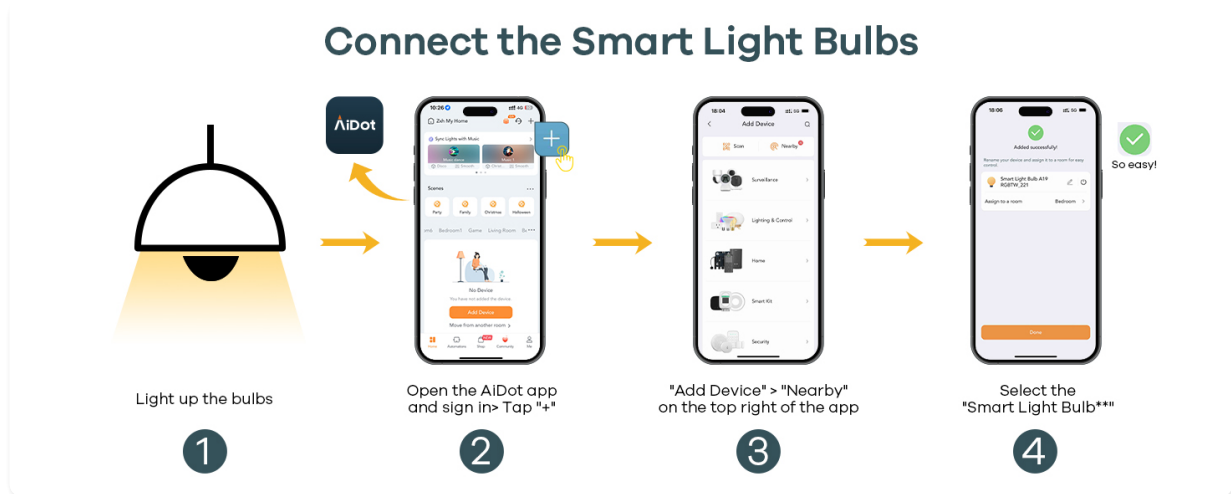


Image: Visual representation of the easy setup process for Linkind Smart Bulbs, highlighting the quick connection to the AiDot app.

## 5.4 Integrating with Voice Assistants (Alexa & Google Home)

1. After successfully connecting your bulbs to the AiDot app, navigate to the "Me" tab.
2. Tap "Integration".
3. Select either "Amazon Alexa" or "Google Assistant".
4. Follow the on-screen instructions to link your AiDot account with your chosen voice assistant. This typically involves signing into your Alexa or Google account.
5. Once linked, you can control your Linkind Smart Bulbs using voice commands.

# Compatible Platforms & Apps

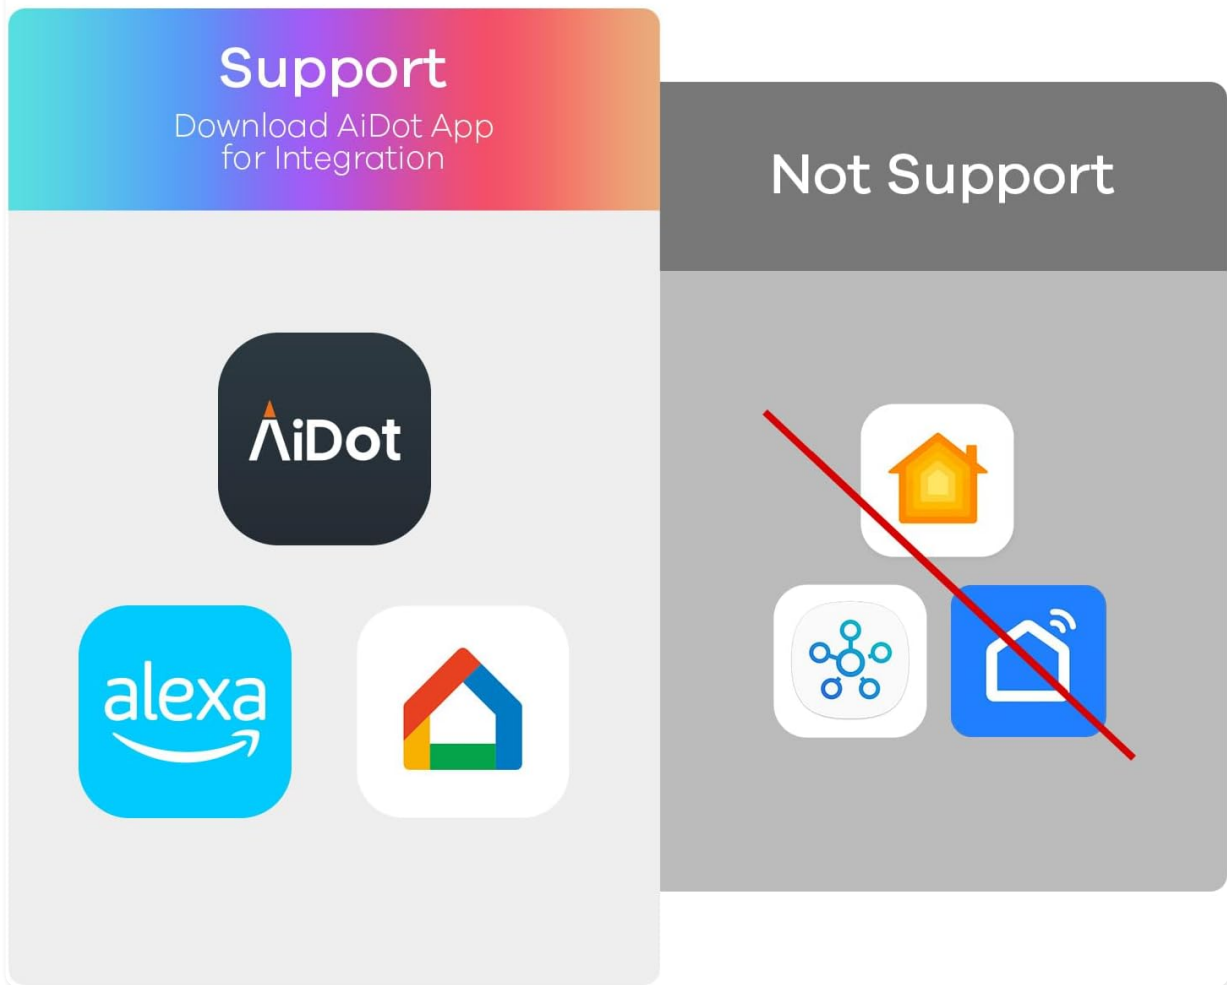


Image: Illustration showing compatibility with AiDot, Alexa, and Google Home apps for controlling Linkind Smart Bulbs.

## 6. OPERATING INSTRUCTIONS

### 6.1 Basic Control (On/Off, Brightness, Color)

Use the AiDot app or voice commands to control your bulbs:

- **On/Off:** Tap the power icon in the app or say "Alexa/Hey Google, turn on/off [light name]".
- **Brightness:** Adjust the brightness slider in the app (1%-100%) or say "Alexa/Hey Google, set [light name] to 50% brightness".
- **Color:** Select a color from the color wheel in the app or say "Alexa/Hey Google, set [light name] to blue".

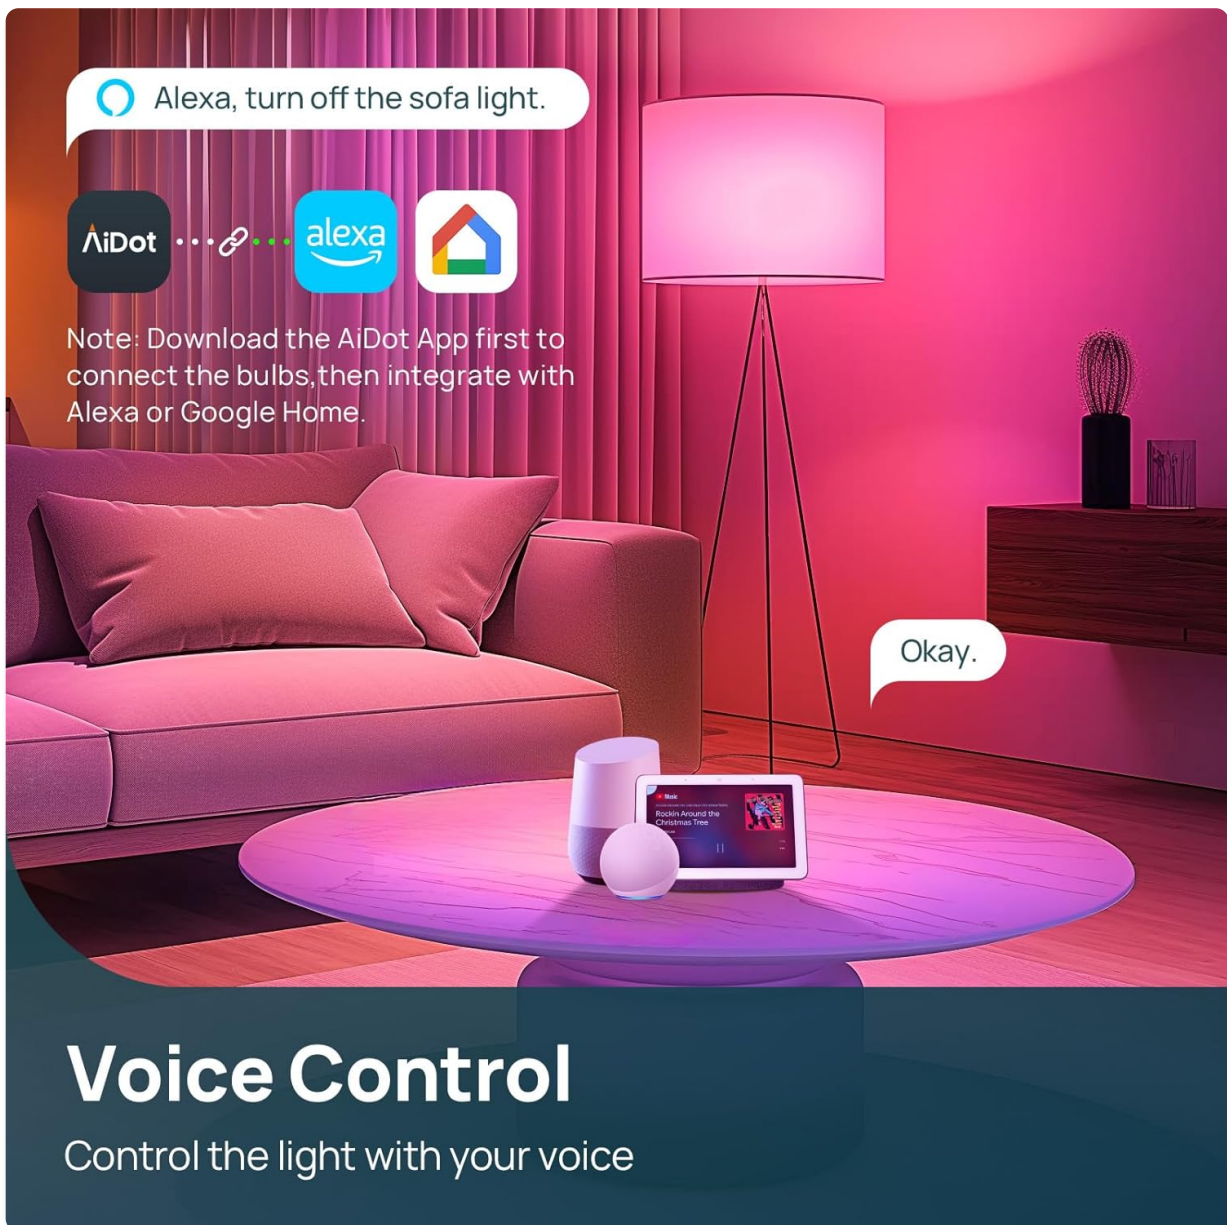


Image: A living room scene demonstrating voice control of Linkind Smart Light Bulbs using Alexa and Google Home, showing a pink light setting.

Your browser does not support the video tag.

Video: This video highlights the brightness capabilities of the Linkind 1100LM Smart Bulb and its compatibility with Alexa and Google Home for control.

## 6.2 Color Changing & Tunable White

Explore the full range of lighting options:

- **16 Million Colors:** Access a vast spectrum of colors to match any mood or occasion.
- **Tunable White:** Adjust the white light temperature from warm (1800K) to cool (6500K) to suit your preference or time of day.



Image: A living room setting showcasing the ability of Linkind Smart Bulbs to display 16 million colors and tunable white light (1800K-6500K).

## 6.3 Music Sync

Enhance your audio experience by synchronizing your lights with music:

- In the AiDot app, navigate to the "Music" section.
- Select a rhythm theme to have your lights change color and brightness in sync with your music.


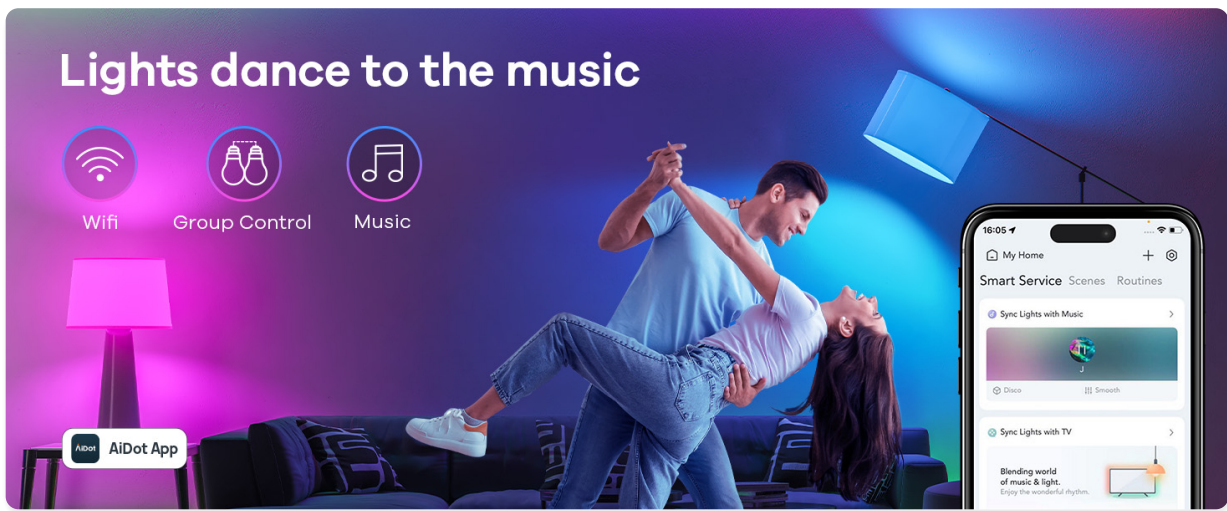


Image: A living room scene with people dancing, illustrating the music sync feature of Linkind Smart Light Bulbs, where lights change in rhythm with music.

## 6.4 Group Control & Scheduling

Manage multiple bulbs efficiently:

- **Group Control:** Group multiple bulbs together in the AiDot app to control them simultaneously with a single command.
- **Scheduling:** Set schedules for your lights to turn on/off or change settings at specific times, automating your lighting.

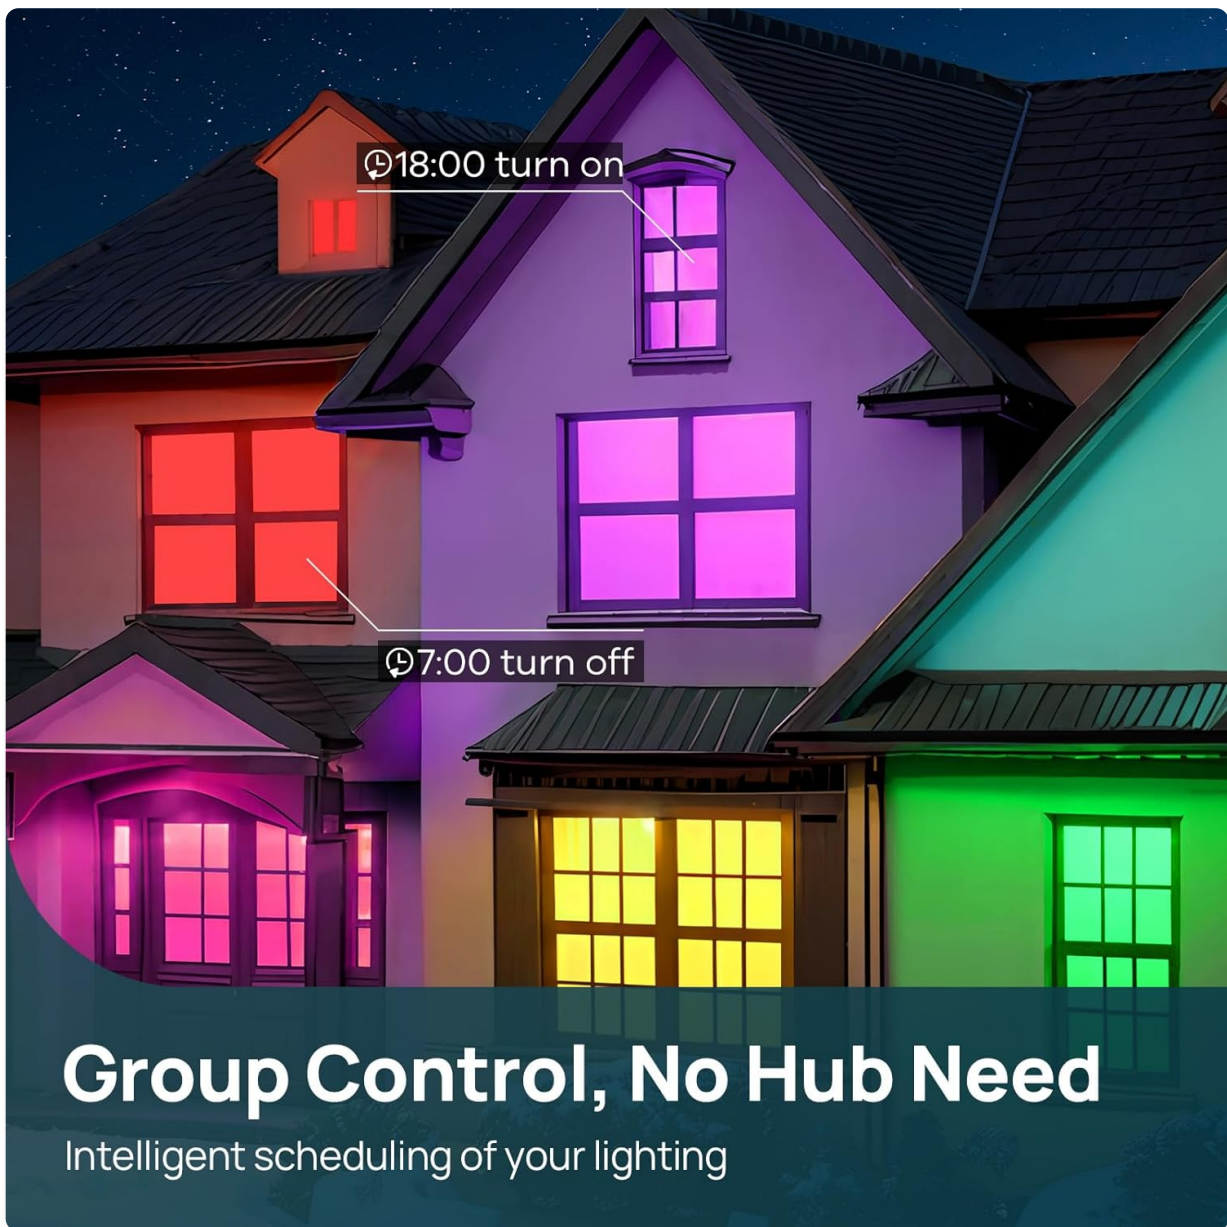

# Group Control, No Hub Need

Intelligent scheduling of your lighting

Image: An exterior view of a house with different colored lights in windows, illustrating the group control and intelligent scheduling features of Linkind Smart Light Bulbs.

## 6.5 Light Shows

Create dynamic lighting experiences:

- **Preset Light Shows:** The AiDot app offers a variety of preset light shows for different moods and occasions.
- **DIY Light Shows:** Customize your own light shows by selecting colors, effects, speed, and intensity.

Your browser does not support the video tag.

Video: This video demonstrates how to create and customize light shows with Linkind Color Changing Smart Bulbs, showcasing various effects and color transitions.

Your browser does not support the video tag.

Video: A festive video showcasing Linkind Smart Bulbs used in Christmas decorations, demonstrating various color changes and light effects for holiday ambiance.

## 7. MAINTENANCE

To ensure the longevity and optimal performance of your Linkind Smart Light Bulbs:

- **Cleaning:** Ensure the bulb is off and cool before cleaning. Wipe with a soft, dry cloth. Do not use liquid cleaners.
- **Storage:** If storing the bulbs for an extended period, keep them in a cool, dry place away from direct sunlight.
- **Firmware Updates:** Regularly check the AiDot app for firmware updates to ensure your bulbs have the latest features and security enhancements.

## 8. TROUBLESHOOTING

If you encounter issues with your Linkind Smart Light Bulbs, try the following solutions:

### 8.1 Connection Issues

- **Check Wi-Fi:** Ensure your Wi-Fi network is 2.4GHz. The bulbs do not support 5GHz Wi-Fi.
- **Bluetooth Enabled:** Make sure Bluetooth is enabled on your smartphone during the initial setup.
- **Proximity:** Keep your smartphone close to the bulb during the connection process (within 35 inches).
- **Power Cycle:** Turn the light fixture off and on again to restart the bulb.
- **Reset the Bulb:** If connection issues persist, you may need to reset the bulb.

### 8.2 How to Reset the Bulb

To reset a Linkind Smart Light Bulb:

1. Turn the bulb ON.
2. Turn the bulb OFF and ON more than 5 times consecutively.
3. The bulb will begin to alternate flashing (e.g., red, green, blue, white) indicating a successful reset.
4. Once reset, the bulb is ready for a new connection process via the AiDot app.

Your browser does not support the video tag.

Video: This video also includes a demonstration of how to reset the Linkind Smart Light Bulbs, which is useful for resolving connection issues.

### 8.3 Flickering or Buzzing

- Ensure the bulb is not installed in a fixture controlled by a traditional dimmer switch. Smart dimming is exclusively controlled through the AiDot app or voice commands.

## 9. SPECIFICATIONS

Attribute	Value
Brand	Linkind
Model Number	LS10008142
Light Type	LED
Light Color	RGBTW (Red, Green, Blue, Tunable White)
Shape	A-shape (A19)

Lumen Output	1100 Lumens (75W Equivalent)
Power Consumption	11 Watts
Efficiency	High Efficiency (100 lm/W)
Connectivity Technology	Bluetooth, Wi-Fi (2.4GHz only)
Controller Type	Amazon Alexa, Google Assistant
Indoor Outdoor Usage	Indoor
Material Type	Glass, Plastic

## Find The Perfect Size Fit



**USE WITH**

**Not compatible with dimmer switches**

\*Note: Ensure your fixture size matches the bulb. Not for use with dimmable fixtures, as flickering may occur.

Image: A comparison of different A-shape bulb sizes (A15, A19, A21), indicating the A19 bulb is featured, along with a note about incompatibility with dimmer switches.

# Dimensions



Image: Detailed dimensions of the Linkind Smart A19 RGBTW Light Bulb, showing its height and width.

## 10. WARRANTY & SUPPORT

- **12-Months Unconditional Replacement:** Enjoy a 12-month period for unconditional product replacement.
- **Lifetime Warranty:** Linkind provides lifetime service and technical support for your smart bulbs.
- **Live Customer Support:** For assistance, please contact customer support at **1-877-770-5727**. Support is available Monday-Friday, 9 AM-5 PM PST.