



BLUETTI D300S PV Dropdown Module User Manual

[Home](#) » [Bluetti](#) » BLUETTI D300S PV Dropdown Module User Manual 

BLUETTI D300S PV Dropdown Module User Manual



Contents

- [1 BRIEF INTRODUCTION](#)
- [2 WHAT'S IN THE BOX](#)
- [3 FEATURES OF D300S](#)
- [4 INSTALLATION](#)
- [5 TECHNICAL SPECIFICATIONS](#)
- [6 SAFETY INSTRUCTION](#)
- [7 DECLARATION](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)


BRIEF INTRODUCTION

D300S created by BLUETTI Tech Team to allow your EP500/Pro, AC300 to have a chance to connect with Roof/Rigid panels for 2400W Max. Solar charging, especially users who already have installed rigid solar panels and PV grid-connected inverters, and the solar panel array's total open-circuit voltage exceeds the EP500/Pro,


AC300 input limit(140V/150V), D300S will be perfect to adjust the total voltage and match the input requirements of EP500/Pro, AC300.

WHAT`S IN THE BOX


- D300S PV Drop Down Module x1 pcs

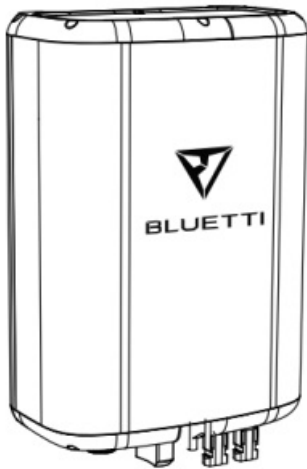

- DC Output Cable(Aviation to MC4*2) x1 pcs

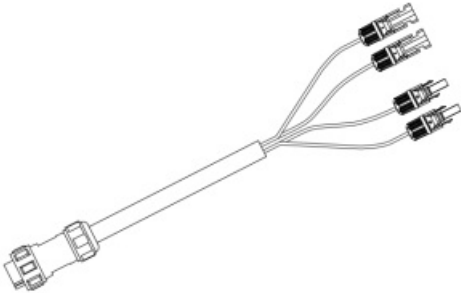

- User Manual x1 pcs

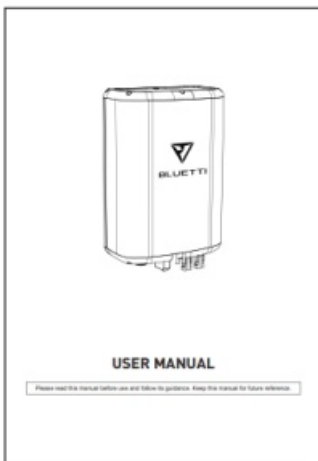

- Warranty Card x1 pcs

Warranty Card



- Certificate of QC Pass x1 pcs


Certificate

Production date: _____

Q C : _____

FEATURES OF D300S

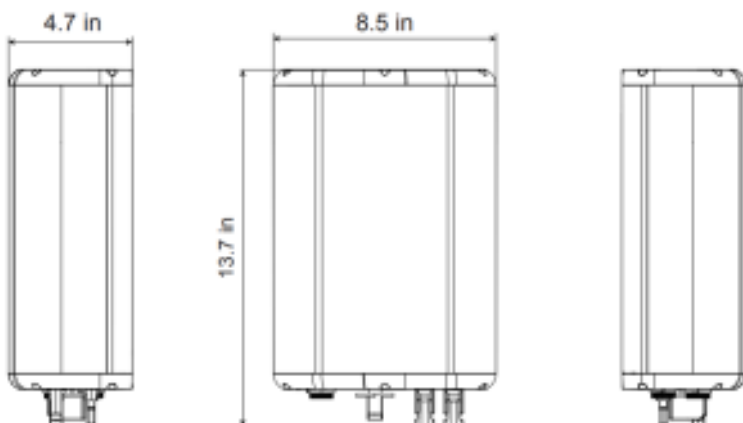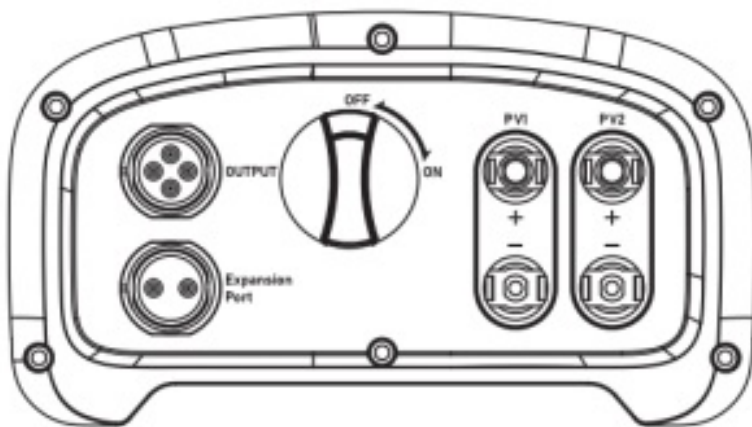

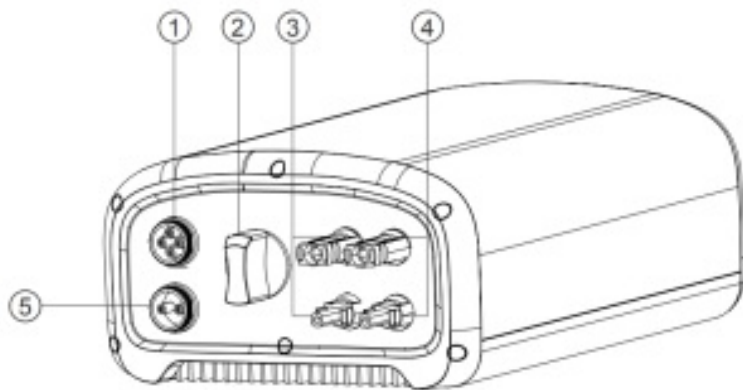


1. Output Port: connect to power the power station.
2. Main Switch of D300S: please turn OFF during installation.
3. NO1. MPPT(PV1 indicates DC1,Connect with your solar panels)
4. NO2. MPPT(PV2 indicates DC2,Connect with your solar panels)
5. Expansion Port: For future updating via 485 communication port.

INSTALLATION

Step1.


Please turn OFF the switch.

The Main Switch of D300S is kept in the OFF state to ensure safety during installation.

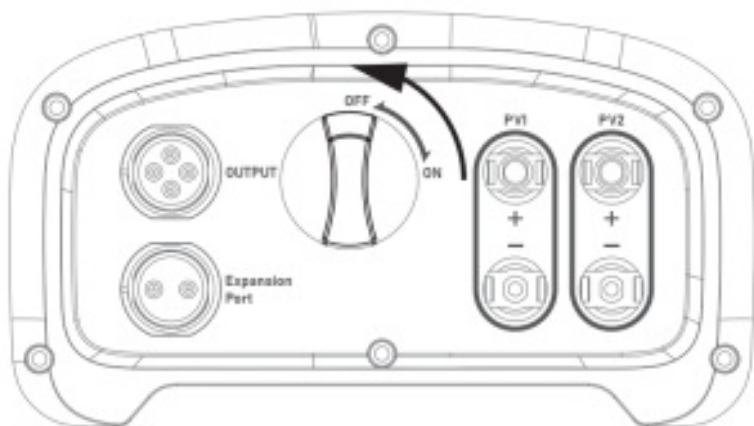


Step2

For EP500Pro/AC300, set DC1 Input Source, DC2 Input Source to Others on screen(Main page – Settings), PV Parallel Enable to ON.

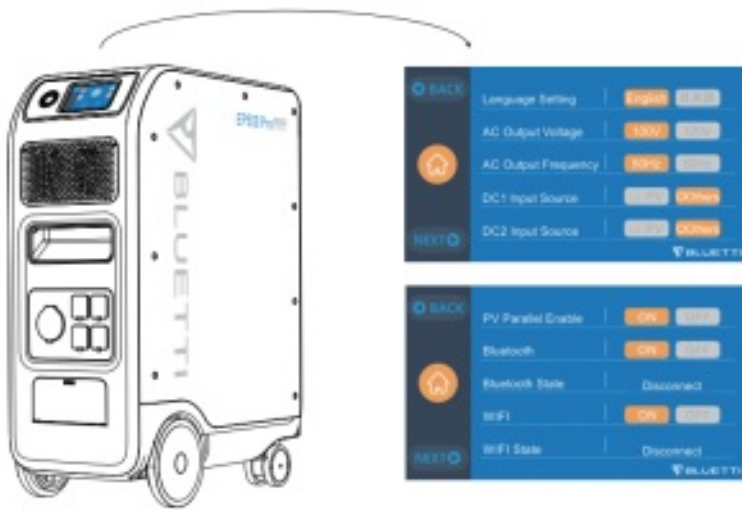

Step3.





The roof solar panels are connected to D300S as shown in the figure. Please make sure that one set of solar panels is connected to PV1, and the other set of solar panels is connected to PV2. Be careful not to mix them.

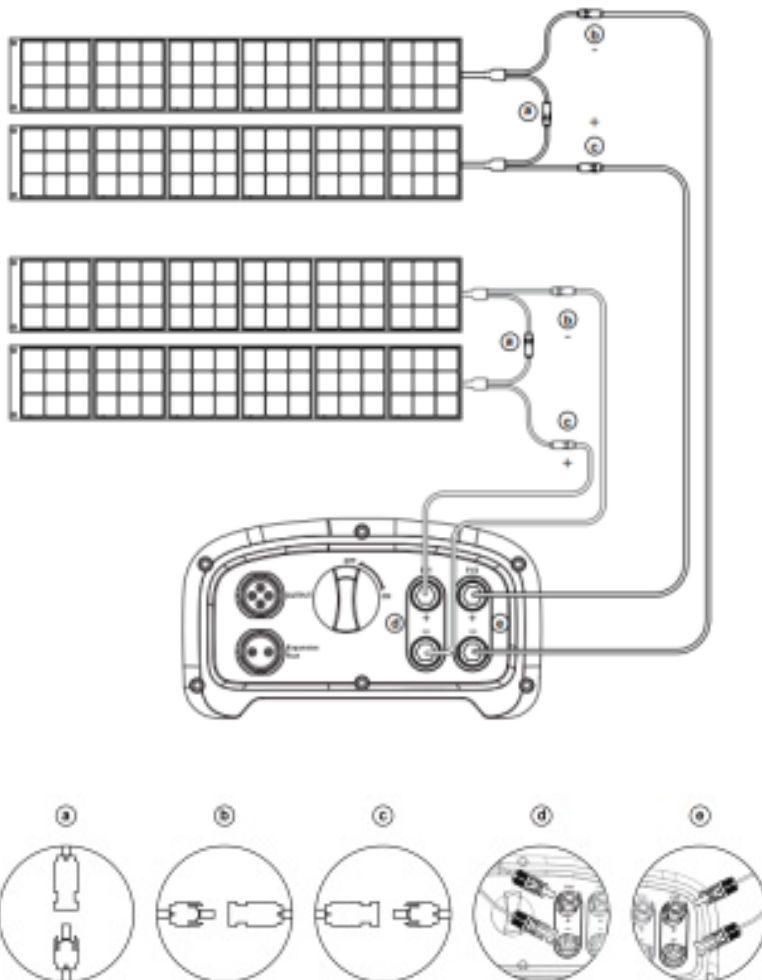

Example for rigid panels connecting to D300S in parallel.

Step4.


Connect EP500Pro with D300S with DC Output Cable(Included).

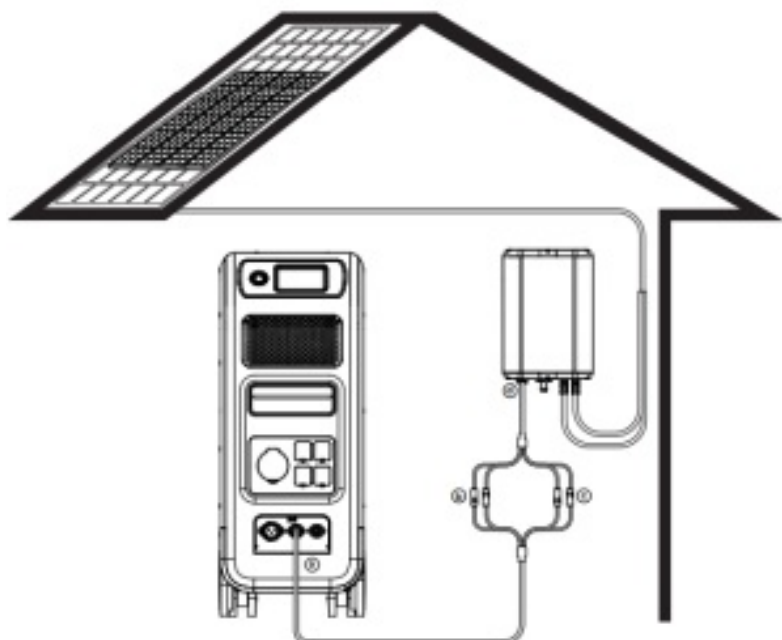

- a. DC Output Cable to EP500Pro
- b. DC1 poles to PV1 poles
- c. DC2 poles to PV2 poles
- d. DC Output Cable to D300S

Step5

Turn the main switch from OFF to ON to activate the solar charging system.

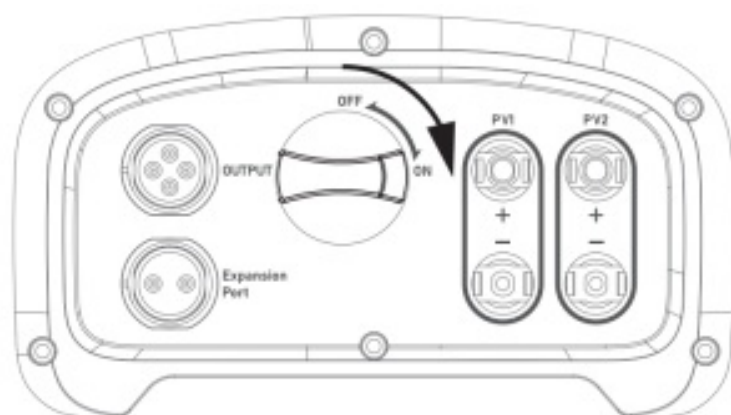

TECHNICAL SPECIFICATIONS

List	Min.	Rated	Max.	Note
DC output				
Power of Output	/	/	3000W	/
Voltage	65V	115V	135V	/
Current	/	/	26A	/
Short-circuit Protection	Supported			
PV input				
Power of Input	/	/	3000W	/
MPPT Voltage	120V	360V	500V	Open circuit voltage 550V
Current	/	/	15A	
Dual MPPT	Supported			Dual MC4 Plugs
Internal Over-heated	/	85°C	/	
Radiator Over-heated	/	95°C	/	
Short-circuit Protection	Supported			<20VDC
Max. Efficiency	97.8%			
Output Over-voltage Protection	> 140VDC			Stop Output Function

Ambient Temp.	-10°C	25°C	40°C	
Storage Temp.	-20°C	25°C	40°C	No condensation
Altitude	< 2000m			
Protection Level	IP54			
Dimensions	350*216*120mm/13.7*8.5*4.7in			
Net Weight	7KG/15.41b			

SAFETY INSTRUCTION


Please check whether D300S is damaged, cracked, liquid leakage, heat or other abnormalities or AC line is damaged before operating. If any, please stop using the product immediately and contact the seller;

- Keep a distance of 50mm between D300S and other objects.
- Avoid exposing to direct sunlight when the solar system is working and DO NOT place the D300S near heat sources.
- It is prohibited to place the equipment in an environment with flammable, explosive gas, or smoke. Since D300S relies on the shell to dissipate heat, over-temperature of the shell will lead to damage.
- DO NOT attempt to replace the internal components of the equipment by any unauthorized personnel.
- DO NOT operate in wet conditions. Please let the unit dry completely before using if the equipment becomes wet.
- Please ensure proper ventilation while in use, inadequate ventilation may cause permanent damage to the equipment.
- Do not place anything on the top of D300S, please install it where people cannot touch it.
- DO NOT move the unit while operating as vibrations and sudden impacts may lead to poor connections to the hardware inside.
- In case of fire, only a dry powder fire extinguisher is suitable for the product.
- For safety purposes, please use only the original charger and cables designed for the equipment. We are not liable for damage caused by third-party equipment and may render your warranty invalid.

DECLARATION

- Due to product improvement, some changes in appearance and specifications may be made without extra statement.
- No compensation for damages shall be made for utilizing non-standard adapters and accessories.
- BLUETTI shall not be liable for damage caused by force majeure factors such as fire, typhoon, flood and earthquake, or intentional negligence, misuse, or use under other abnormal conditions.
- BLUETTI shall not be liable for any damages caused by operating the product not in accordance with the method of use in the instruction manual.
- D300S is not suitable for the use on the relevant equipment or machines involving:
- Personal safety, such as atomic energy devices, Hi-Fi player, emergency medical devices, etc., or any equipment or machines that require extremely highly reliable power sources. We are not responsible for accidents, fires, wrongful or negligent actions caused by such equipment or machines which results in damage.

Documents / Resources

 <small>D300S PV DROP DOWN MODULE</small> <small>© 2023 Bluetti. All rights reserved. No part of this publication may be reproduced without prior written permission from Bluetti.</small>	BLUETTI D300S PV Dropdown Module [pdf] User Manual D300S, PV Dropdown Module, D300S PV Dropdown Module
---	---

[Manuals+](#)