Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

VAUNO EN8830-2

VAUNO EN8830-2 Vibrating Alarm Clock with Bed Shaker Instruction Manual

Model: EN8830-2

Introduction

The VAUNO EN8830-2 Vibrating Alarm Clock is designed to provide an effective wake-up experience, especially for heavy sleepers, individuals with hearing impairment, or those who prefer a multi-sensory alarm. It combines a powerful bed shaker, a loud buzzer, and a flashing wake-up light to ensure you wake up on time. This manual provides detailed instructions for setting up and operating your new alarm clock.

Product Features

- **Three Wake-Up Modes:** Simultaneous operation of super powerful bed shaker, loud buzzer, and flashing wake-up light.
- **Flashing Wake-Up Light:** Integrated into the bed shaker with 8 adjustable brightness levels, also functions as a soft night light or sleep aid light.
- **10 Chord Natural Sounds:** Offers a variety of alarm tones to choose from, with 15 adjustable volume levels.
- **Dual Alarms:** Set two separate alarms for different wake-up times.
- **Large 7.3-Inch LED Display:** Clear time display with 4 levels of adjustable brightness dimmer.
- **USB Charger Port:** Convenient for charging Android and iOS devices.
- **Battery Backup:** Maintains time settings during power outages (requires 1 CR2032 battery, included).
- **Easy Operation:** Clearly marked buttons and a large snooze button for user convenience.
- **12/24 Hour Format:** Select preferred time display.

Package Contents

- VAUNO EN8830-2 Alarm Clock Unit
- Bed Shaker with integrated flashing light
- Power Adapter (Corded Electric)
- CR2032 Battery (pre-installed or included for backup)
- User Manual (this document)

Setup

1. **Unpack:** Carefully remove all components from the packaging.
2. **Connect Power:** Plug the power adapter into the alarm clock and then into a standard electrical outlet. The display will light up.
3. **Install Battery Backup:** Ensure the CR2032 battery is correctly installed in the battery compartment. This battery preserves time and alarm settings during a power interruption.
4. **Connect Bed Shaker:** Plug the bed shaker cable into the designated port on the alarm clock. The bed shaker is automatically paired and ready for use.
5. **Initial Time Setting:** The clock may display a default time. Refer to the "Operating Instructions" section to set the correct time.



Figure 1: Easy setup with the large snooze button for convenient operation.

Operating Instructions

Setting Time and 12/24 Hour Format

Specific buttons for time setting are usually labeled (e.g., "TIME SET" or "SET"). Press and hold the time set button, then use the hour/minute adjustment buttons (often labeled "+"/"-" or "UP"/"DOWN") to set the current time. Press the time set button again to confirm. To switch between 12-hour and 24-hour format, there is typically a dedicated button or it's part of the time setting sequence.

Setting Alarms (Dual Alarms)

The clock supports two separate alarms (Alarm 1 and Alarm 2). Look for "ALARM 1" and "ALARM 2" buttons. Press and hold an alarm button to enter alarm setting mode. Use the adjustment buttons to set the desired wake-up time. During alarm setting, you can also select the alarm sound (from 10 chord natural sounds) and adjust the volume (15 levels). Press the alarm button again to confirm. To activate or deactivate an alarm, press the corresponding alarm button briefly.



Figure 2: Customize your alarm with 15 volume levels and 10 chord music options.

Snooze Function

When an alarm sounds, press the large "SNOOZE" button located on the top of the clock. This will temporarily silence

the alarm for approximately 9 minutes, allowing for extra sleep. The alarm will sound again after the snooze period.

Adjusting Display Brightness

The 7.3-inch LED display has 4 adjustable brightness levels. Look for a "DIMMER" or "BRIGHTNESS" button. Press it repeatedly to cycle through the brightness settings until you find your preferred level.

Bed Shaker and Flashing Wake-Up Light

The bed shaker provides powerful vibration and includes an integrated flashing wake-up light. When an alarm is active, the shaker will vibrate, and its light will flash. The brightness of this wake-up light can be adjusted (8 levels). The bed shaker can be placed in various locations for optimal effect:

- Under your pillow.
- Under the fitted sheet.
- Between the mattress and box spring.

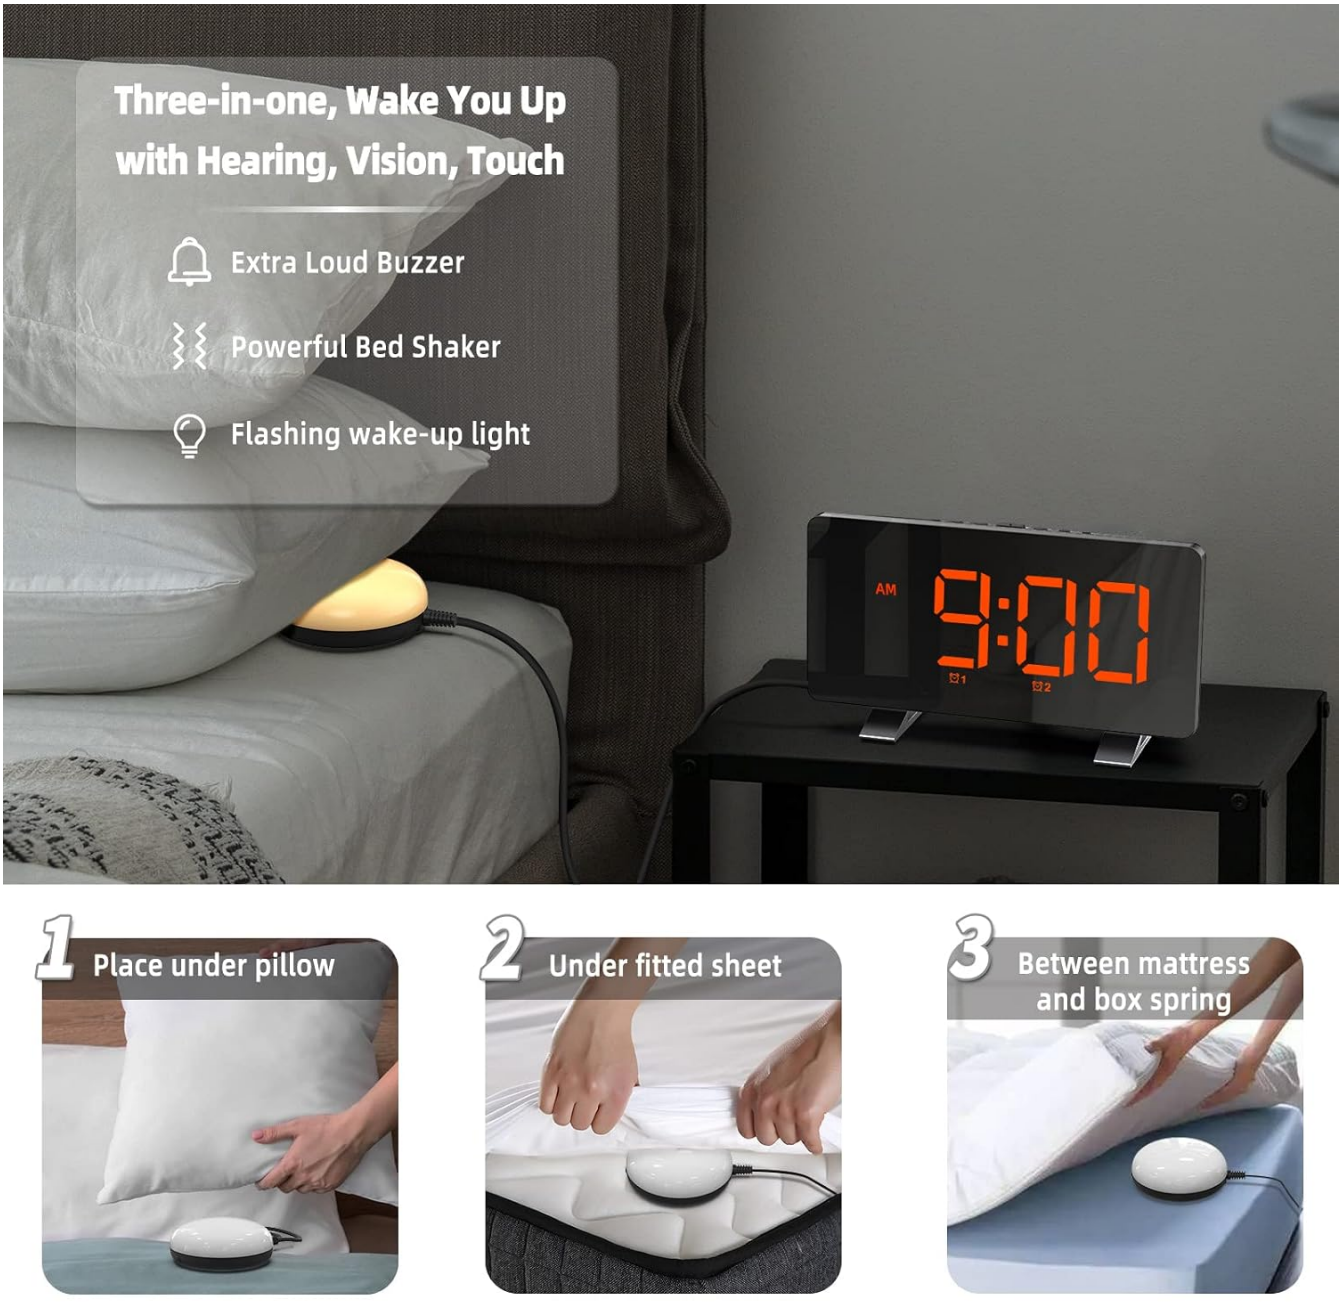

Figure 3: Recommended placements for the bed shaker for effective waking.



Figure 4: The bed shaker's flashing light also serves as a versatile night light.

USB Charging Port

The alarm clock features a USB charging port on its side or back. You can use this port to conveniently charge your smartphone (Android or iOS) or tablet while you sleep. Ensure your device's charging cable is compatible with the USB port.

Battery Backup

The included CR2032 battery provides backup power to maintain the time and alarm settings in the event of a power failure. The display will not be illuminated during battery backup mode, but the internal clock will continue to run, and your settings will be preserved. Replace the battery annually or when the low battery indicator appears (if applicable).

Maintenance

- **Cleaning:** Wipe the clock and bed shaker with a soft, dry cloth. Do not use abrasive cleaners or solvents.

- **Avoid Water:** Keep the device away from water and high humidity.
- **Placement:** Place the clock on a stable, flat surface. Avoid direct sunlight or extreme temperatures.

Troubleshooting

Problem	Solution
Clock display is blank.	Ensure the power adapter is securely plugged into both the clock and the electrical outlet. Check if the outlet is functional. If using battery backup, the display will not light up; plug into AC power for display.
Alarm does not sound/vibrate.	Verify that the alarm is activated (check the alarm indicator on the display). Ensure the volume is not set to zero. Check if the bed shaker cable is securely connected.
Time/settings reset after power outage.	Check if the CR2032 backup battery is installed correctly and is not depleted. Replace the battery if necessary.
USB charging port not working.	Ensure the alarm clock is powered by the AC adapter. Check the USB cable and the device being charged for proper connection and functionality.

Specifications

Feature	Detail
Brand	VAUNO
Model Number	EN8830-2
Display Type	Digital LED (7.3 inch)
Power Source	Corded Electric
Battery Backup	1 x CR2032 (included)
Special Features	Adjustable Brightness, Adjustable Volume, Dual Alarms, Snooze, Bed Shaker, Wake Up Light, USB Charger
Product Dimensions	43W x 91H Millimeters (Clock unit)
Material	Acrylonitrile Butadiene Styrene (ABS)



Why Choose Us	Our Adavantages	Others
For long term durability	Exquisite, high quality ABS raw-materials	Cheaply made, cheap recycled plastic
Buzzer/Vibration very strong	Adpot high power speaker and vibrating motor	Common low power buzzer and motor
10 Chord Alarm, 15 Volume control	To meet your different requirements	Only 1 alarm tone and volume
Wake up light, night light	Bed shaker with dimmable light	No light or tiny light
Easy set up	Big snooze button and many shortcut button	Poor design and small buttons

Figure 5: Product dimensions and bed shaker cable length.

Warranty and Support

For warranty information and customer support, please refer to the contact details provided with your purchase or visit the official VAUNO website. Keep your purchase receipt as proof of purchase for any warranty claims.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CW9RM47P

More documents and user manuals: **https://manuals.plus/**