



BLUSTREAM OPT41AU 4 x Input Optical Audio Switch Instruction Manual

[Home](#) » [BLUSTREAM](#) » BLUSTREAM OPT41AU 4 x Input Optical Audio Switch Instruction Manual 




OPT41AU 4 x Input Optical Audio Switch Instruction Manual

Contents

- [1 Description](#)
- [2 Key Features](#)
- [3 Connectivity](#)
- [4 Specifications](#)
- [5 Regulatory Compliance](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

Description

Our OPT41AU is an advanced 4-way optical audio switch. Perfect for the integration of multiple audio sources with a soundbar. The OPT41AU also has a built-in DAC and simultaneous digital and analog stereo audio outputs. The OPT41AU supports 192kHz sample rates and up to 24-bit resolution for enhanced sound reproduction.

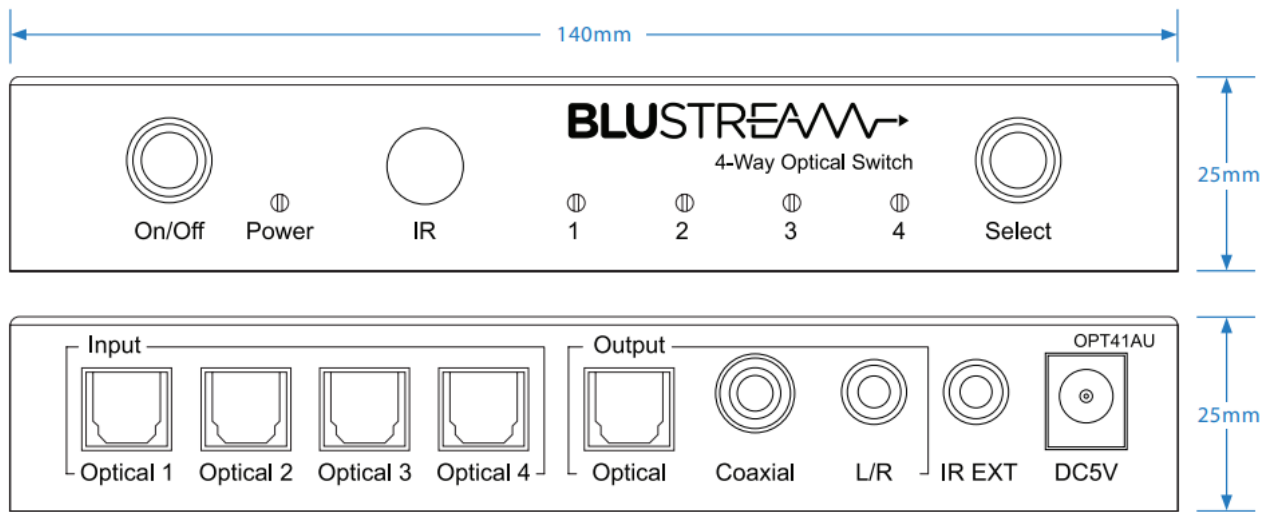

Key Features

- Features 4 x optical S/PDIF digital inputs which can be switched to the single optical output
- DAC (Digital to Analogue Audio Converter) converts selected optical digital to analog left / right stereo audio output
- The built-in digital audio converter converts selected optical audio input to coaxial digital output
- Outputs optical digital, coaxial digital, and analog left / right stereo audio concurrently
- Supports sample rates 32kHz, 44.1kHz, 48kHz, 96kHz & 192kHz up to a 24-bit resolution
- Supports LPCM, DTS, Dolby Digital, and Dolby Digital plus when used as a straight digital in / digital out switcher
- Ultra-low jitter and high fidelity design
- Input selection button on the front panel to toggle between optical inputs
- IR receiver on the front panel to switch inputs and turn On / Off audio outputs using supplied IR remote
- External IR input can be used to extend IR with the Blustream IR receiver cable



Connectivity

- Audio Input Connectors: 4 x Optical (S/PDIF)

- Output Connectors: 1 x Optical (S/PDIF), 1 x RCA (S/PDIF) & 1 x Analog audio L/R (3.5mm stereo jack)
- IR Input Ports: 1 x 3.5mm stereo jack

Specifications

- Shipping Weight: 0.5kg
- Operating Temperature: 32°F to 104°F (0°C to 40°C)
- Storage Temperature: -4°F to 140°F (-20°C to 60°C)
- Dimensions (W x H x D): 140mm x 25mm x 70mm

Included Accessories

IR Remote	1 x REM-OPT41
Rack Mount	Mounting brackets
Power Supply	5V/1A DC, screw type connector


Control

IR
Front Panel

Regulatory Compliance



Documents / Resources

	BLUSTREAM OPT41AU 4 x Input Optical Audio Switch [pdf] Instruction Manual OPT41AU 4 x Input Optical Audio Switch, OPT41AU, 4 x Input Optical Audio Switch
---	---