



BN-LINK CP-U49A Multi Voltage DPDT Time Control User Guide

[Home](#) » [BN-LINK](#) » BN-LINK CP-U49A Multi Voltage DPDT Time Control User Guide 




Contents


- [1 Function Description](#)
- [2 Input & Output Appearance](#)
- [3 Ratings & Approval](#)
- [4 Packing](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)

Function Description

- Easy to install and use
- Up to 48 programs per day
- Humidity 0-95%
- Can control 1 or 2 devices at the same time
- With ON/OFF Timing manual switch
- Min. Setting: 15 minutes
- Max. Setting: 24 hours
- Operating environment: for outdoor use
- Operating Temperature: -40°F to 130°F (-40°C to 54.5°C)
- Storage Temperature: -4 °F to 140°F (-20°C to 60°C)

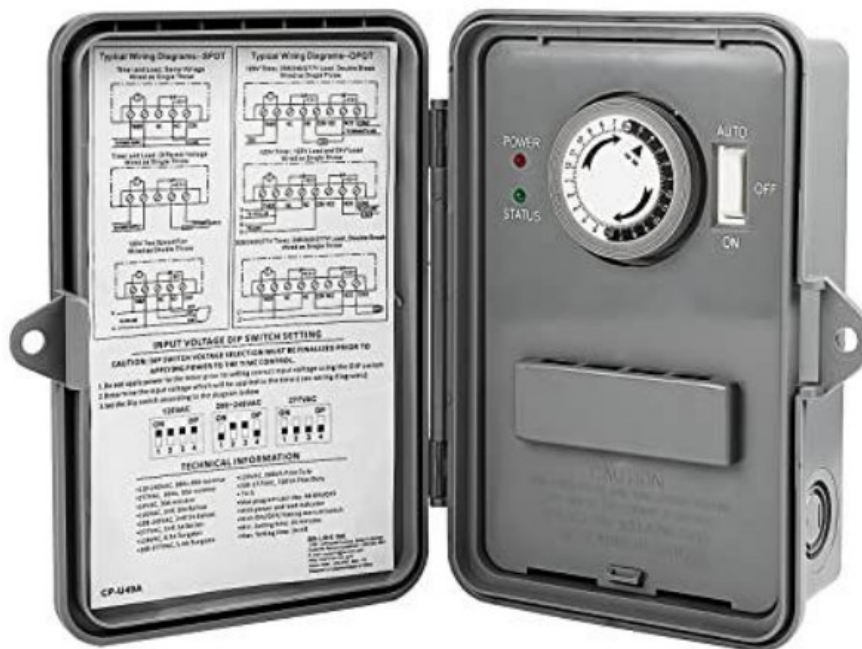

Input & Output Appearance

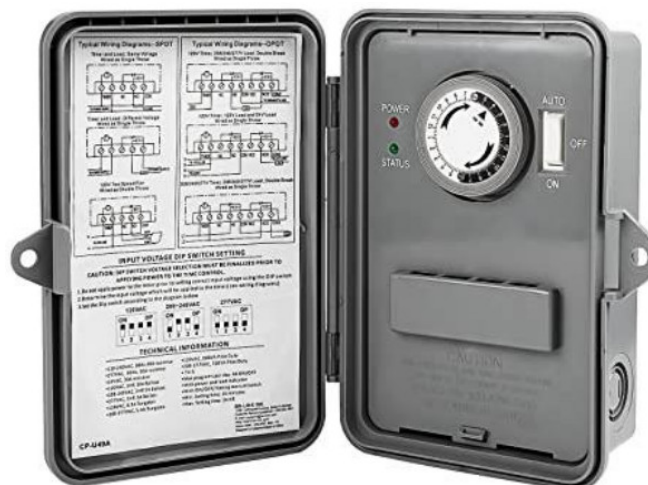

Ratings & Approval


Input Voltage: 120VAC, 208/240VAC, 277VAC (Select by DIP switch)

Frequency: 60Hz

Resistive: 120-240VAC, 40A/277VAC, 30A/14VDC, 30A

Tungsten: 120VAC, 8.3A/208-277VAC, 5.4A

Other Ratings: 1-2 HP

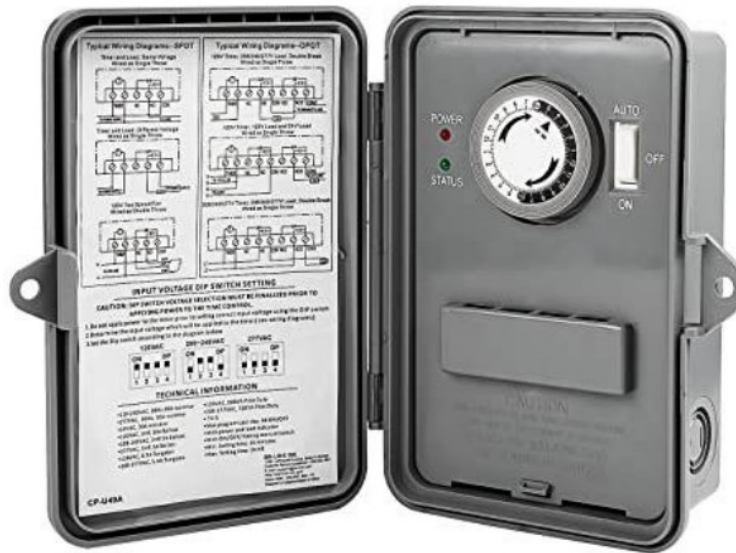

Packing



Product Measurement (inch): 7.32×3.19×9.09

Product Weight (lb): 1.60

Unit Package Measurements (inch): 7.32×3.19×9.09

Unit Package Weight (lb): 1.79

Master Carton Measurements (inch): 16.54×15.87×10.16

Master Carton Weight (lbs): 19.47

Master Carton Quantity: 10 PCS

Master Carton Cube (cu.ft): 1.54

BN-LINK INC.

11701 6th Street, Rancho Cucamonga, CA 91730

Customer Service Assistance: 1.909.592.1881

E-mail: support@bn-link.com

<http://www.bn-link.com>

Hours: 9AM – 5PM PST, Mon – Fri
Designed in California Made in China

Documents / Resources

[illegible]

References

- User Manual

Manuals+,