



BOSCH DFS097A50A Slideout Rangehood Instructions

[Home](#) » [Bosch](#) » BOSCH DFS097A50A Slideout Rangehood Instructions 



BOSCH

Serie | 4, Slideout rangehood, 90 cm,
Silver metallic
DFS097A50A



Contents

- [1 Optional accessories](#)
- [2 Technical Data](#)
- [3 2 year warranty](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

Optional accessories

DSZ4565 : Standard recirculation kit

DSZ4920 : Installation kit for 90cm wide wall unit

- Extra silent: the high-performance rangehood, with minimal noise.
- Grease filtration level: filters out over 85% of the grease from kitchen air
- EcoSilence Drive™: the powerful, energy-saving drive for hoods.
- LED lighting: for perfect, energy-efficient illumination of the cooktop.
- Intensive speed setting: removes strong kitchen odours especially quickly and effectively.

Technical Data

Typology : Pull-out

Approval certificates : Australia Standards, VDE

Length electrical supply cord : 175 cm

Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm

Minimum distance above an electric cooktop : 430 mm

Minimum distance above a gas cooktop : 650 mm

Net weight : 14.0 kg

Type of control : Electronic

Number of power settings : 3-stages + intensive setting

Maximum output air extraction : 408 m³/h

Boost position output recirculating : 496 m³/h

Maximum output recirculating air : 358 m³/h

Boost position air extraction : 758 m³/h

Number of lights : 2

Noise level : 54 dB(A) re 1 pW

Diameter of air outlet : 150 / 120 mm

Grease filter material : Washable aluminium

EAN code : 4242005058051

Connection Rating : 146 W

Fuse protection : 10 A

Voltage : 220-240 V

Frequency : 50 Hz

Plug type : AU plug

Installation type : Built-in

– Maximum extraction 758 m³/h








– Stainless steel fascia panel/pelmet included

– EcoSilence BLDC brushless motor

2 year warranty

- Noise level according to EN 60704-3 exhaust air:
Max. normal use: 54 dB(A) re 1 pW
Intensive: 69 dB(A) re 1 pW
- Average Energy Consumption: 38.5 kWh/year
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 407 m³/h
Intensive 758 m³/h

Installation in 90cm cupboard requires additional installation accessory DSZ4920 which can be purchased separately.

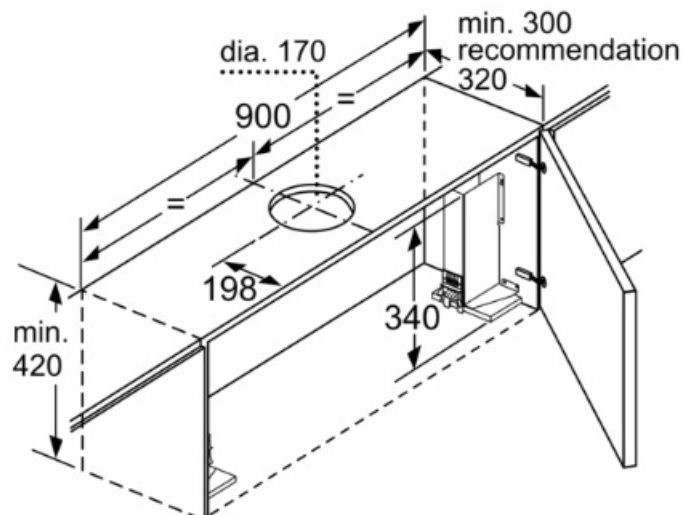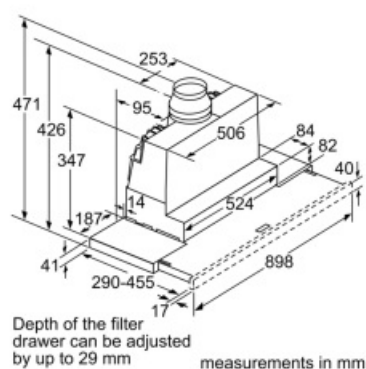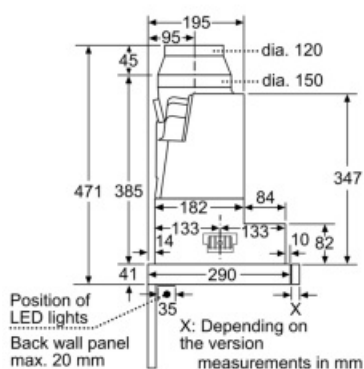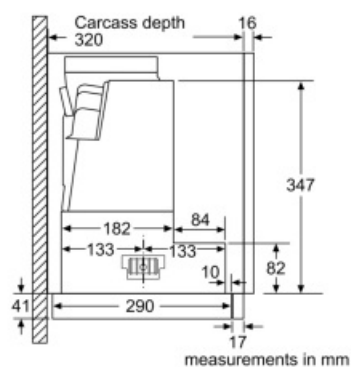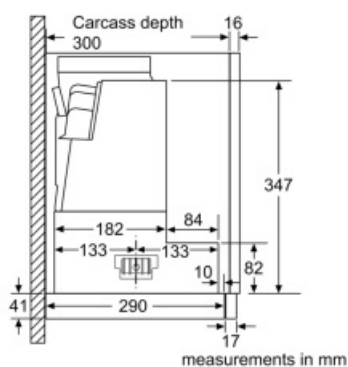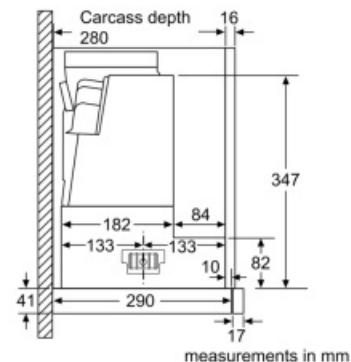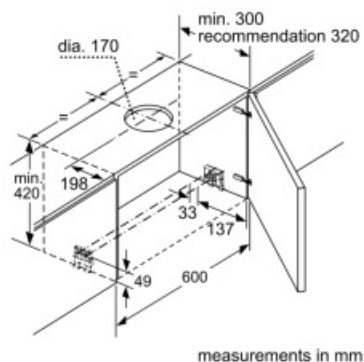

When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template. measurements in mm



Documents / Resources

	BOSCH DFS097A50A Slideout Rangehood [pdf] Instructions DFS097A50A Slideout Rangehood, DFS097A50A, Slideout Rangehood, Rangehood
---	--