



BOSE DesignMax DM10S-SUB Surface-Mount Subwoofer Installation Guide

[Home](#) » [Bose](#) » BOSE DesignMax DM10S-SUB Surface-Mount Subwoofer Installation Guide 

BOSE®

PROFESSIONAL
Design Max DM10S-SUB Surface-Mount Subwoofer
Installation Guide



Design Max DM10S-SUB
Surface-mount Subwoofer

Contents

- 1 Important Safety Instructions
- 2 Product Ratings:
- 3 Package Contents
- 4 Product Dimensions
- 5 Technical Specifications
- 6 Important Installation Information
- 7 Installation Options
- 8 Documents / Resources
 - 8.1 References
- 9 Related Posts

Important Safety Instructions

Please read and keep all safety and use instructions.

This product is intended for installation by professional installers only! This document is intended to provide professional installers with basic installation and safety guidelines for this product in typical fixed-installation systems. Please read this document and all safety warnings before attempting installation.

Do not attempt to service this product yourself. Refer all servicing to authorized service centers, installers, technicians, dealers or distributors. To contact Bose Professional or to find a dealer or distributor near you, visit PRO.BOSE.COM.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produces heat.
9. Only use attachments/accessories specified by the manufacturer.



This product contains magnetic material. Consult your physician on whether this might affect your implantable medical device.

- All Bose products must be installed in accordance with local, state, federal and industry regulations. It is the installer's responsibility to ensure installation of the loudspeakers and mounting system is performed in accordance with all applicable codes, including local building codes and regulations. Consult the local authority having jurisdiction before installing this product.
- Unsafe mounting or overhead suspension of any heavy load can result in serious injury or death, and property damage. It is the installer's responsibility to evaluate the reliability of any mounting method used for their application. Only professional installers with the knowledge of proper hardware and safe mounting techniques

should attempt to install any loudspeaker overhead.

- Do not mount the product in locations where it may be exposed to water or condensation.
- This product is not intended for installation or use in indoor water facility areas (including, without limitation, indoor pools, indoor water parks, hot tub rooms, saunas, steam rooms and indoor skating rinks).
- Do not mount on surfaces that are not sturdy, or that have hazards concealed behind them, such as electrical wiring or plumbing. If you are not sure about installing the bracket, contact a qualified professional installer. Ensure the bracket is installed according to local building codes.
- Use only the hardware and accessories included or specified by Bose for use with Design Max DM10S-SUB loudspeakers. Hardware for securing the loudspeaker to the mounting surface is not supplied. For information on compatible accessories, see the product's technical data sheet at PRO.BOSE.COM.
- Keep the product away from fire and heat sources. Do not place naked flame sources, such as lighted candles, on or near the product.
- Do not make unauthorized alterations to this product.
- The Design Max DM10S-SUB wall mounting bracket is only for use with model DM10S-SUB.
- Clean speakers using only a dry cloth. Do not expose loudspeaker to soap, detergent, mineral oil, alcohol or other cleaning agents or chemicals.

Product Ratings:

Input Voltage: 70V/100V

Impedance: 8 Ω , 250 W

Current or Power: (70V): 20W, 40W, 80W, 150W; (100V): 40W, 80W, 150W

Regulatory Information



This product conforms to all applicable EU directive requirements. The complete declaration of conformity can be found at: www.Bose.com/compliance.




This product conforms to all applicable Electromagnetic Compatibility Regulations 2016 and all other applicable UK regulations. The complete declaration of conformity can be found at: www.Bose.com/compliance



— This symbol means the product must not be discarded as household waste, and should be delivered to an appropriate collection facility for recycling. Proper disposal and recycling helps protect natural resources, human health and the environment. For more information on disposal and recycling of this product, contact your local municipality, disposal service, or the shop where you bought this product.

China Restriction of Hazardous Substances Table

Names and Contents of Toxic or Hazardous Substances or Elements						
	Toxic or Hazardous Substances and Elements					
Part Name	Lead (Pb)	Mercury (Hg)	Cadmium (C d)	Hexavalent (CR(VI))	Polybrominated Bi phenyl (PBB)	Polybrominated dip henyl ether (PBDE)
PCBs	X	0	0	0	0	0
Metal Parts	X	0	0	0	0	0
Plastic Parts	0	0	0	0	0	0
Speakers	X	0	0	0	0	0
Cables	X	0	0	0	0	0
This table is prepared in accordance with the provisions of SJ/T 11364. 0: Indicates that this toxic or hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement of GB/T 26572.						
X: Indicates that this toxic or hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement of GB/T 26572.						

Taiwan Restriction of Hazardous Substances Table

Equipment name: Design Max DM10S-SUB, Type designation: 829380						
	Restricted substances and its chemical symbols					
Unit	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr +6)	Polybrominated biphenyls (PBB)	Polybrominated Biphenyl ethers (PBDE)
PCBs	—	0	0	0	0	0
Metal Parts	—	0	0	0	0	0
Plastic Parts	0	0	0	0	0	0
Speakers	—	0	0	0	0	0
Cables	—	0	0	0	0	0
Note 1: "0" indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence. Note 2: The "—" indicates that the restricted substance corresponds to the exemption.						

Date of Manufacture: The eighth digit in the serial number indicates the year of manufacture; "7" is 2007 or 2017.

China Importer: Bose Electronics (Shanghai) Company Limited, Part C, Plant 9, No. 353 North Raying Road, China (Shanghai) Pilot Free Trade Zone

EU Importer: Bose Products B.V., Gershan 60, 1441 RG Referendum, The Netherlands

Mexico Importer: Bose de México, S. de R.L. de C.V. , Paseo de las Palmas 405-204, Lomas de Chapultepec, 11000 México, D.F. For importer & service information: +5255 (5202) 3545

Taiwan Importer: Bose Taiwan Branch, 9F-A1, No. 10, Section 3, Minhang East Road, Taipei City 104, Taiwan. Phone Number: +886-2-2514 7676

UK Importer: Bose Limited, Bose House, Quayside Chatham Maritime, Chatham, Kent, ME4 4QZ, United Kingdom

Bose and Design Max are trademarks of Bose Corporation.

Bose Corporation Headquarters: 1-877-230-5639


©2021 Bose Corporation. No part of this work may be reproduced, modified, distributed or otherwise used without prior written permission.

Warranty Information


This product is covered by a limited warranty.

For warranty details, visit [PRO.BOSE.COM](https://pro.bose.com).

Package Contents

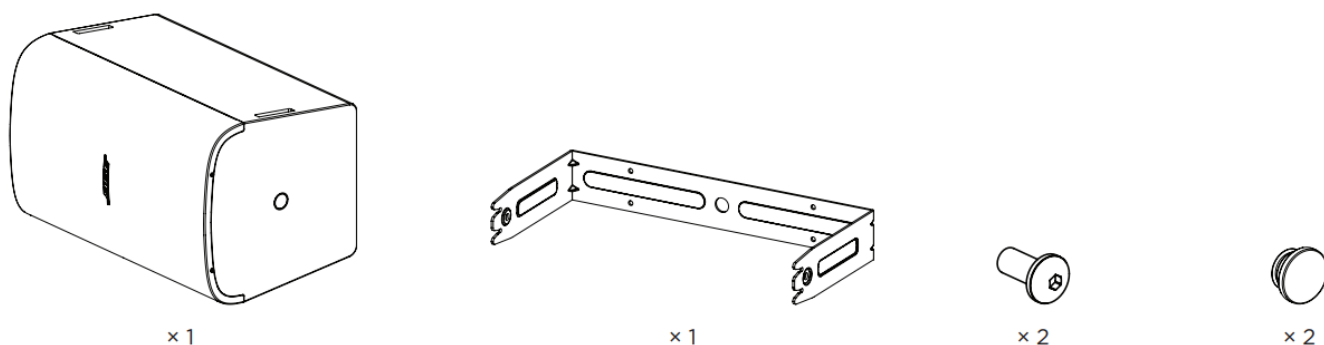

Product Dimensions

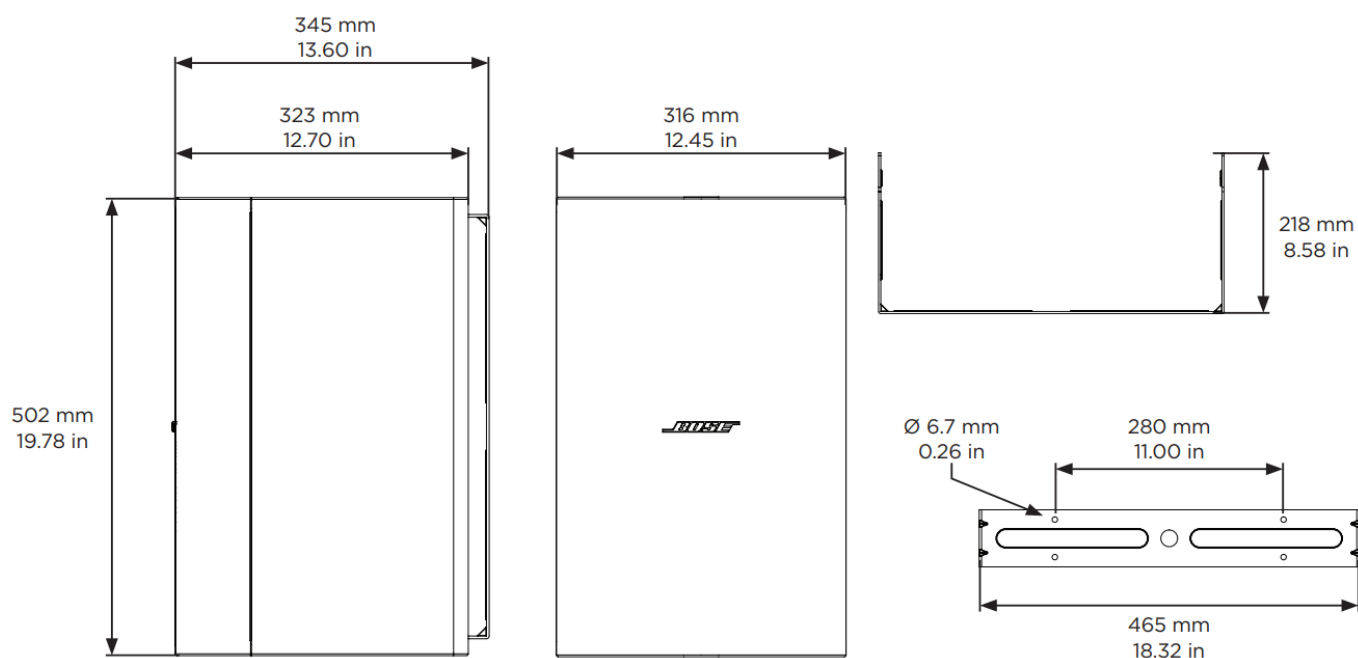



Technical Specifications


For additional specifications, see the Design Max DM10S-SUB technical data sheet at [PRO.BOSE.COM](https://pro.bose.com).

Physical	
Product Dimensions	Height: 502 mm (19.78 in)
	Width: 316 mm (12.45 in)
	Depth: 323 mm (12.70 in)
Net Weight, Loudspeaker with grille and bracket	16.10 kg (35.5 lb)
Shipping Weight	18.82 kg (41.5 lb)

Important Installation Information

 This product is intended for indoor use only. It is the installer's responsibility to ensure installation of the loudspeakers and mounting system is performed in accordance with all applicable codes, including local building codes and regulations. Consult the local authority having jurisdiction before installing this product. It is the responsibility of the installer to ensure the safety of the loudspeaker installation. Failure to properly install the loudspeaker could result in damage, injury, or death. Do not mount the product in locations where it may be exposed to water or condensation.

 Do not mount the product in locations where condensation may occur. This product is not intended for installation or use in indoor water facility areas (including, without limitation, indoor pools, indoor water parks, hot tub rooms, saunas, steam rooms and indoor skating rinks). Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.

 Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produces heat. The hardware for securing the loudspeaker to the mounting surface is not supplied. Consult a building professional for the proper mounting hardware before installing the loudspeaker. Do not mount on surfaces that are not sturdy, or that have hazards concealed behind them, such as electrical wiring or plumbing. If you are not sure about installing the bracket, contact a qualified professional installer. Ensure the bracket is installed according to local building codes.

Wiring the Loudspeaker



Wire Gauge

The Design Max DM10S-SUB loudspeaker is designed to work with 18 AWG (0.8 mm²) to 14 AWG (2.1 mm²) size wire only.


Connection Diagrams

Expose six millimeters (1/4 inch) of bare wire to attach to the terminals.

Note: The loudspeaker is not rated for use with a rigid conduit. The loudspeaker is suitable for a flexible conduit or wiring connection only.

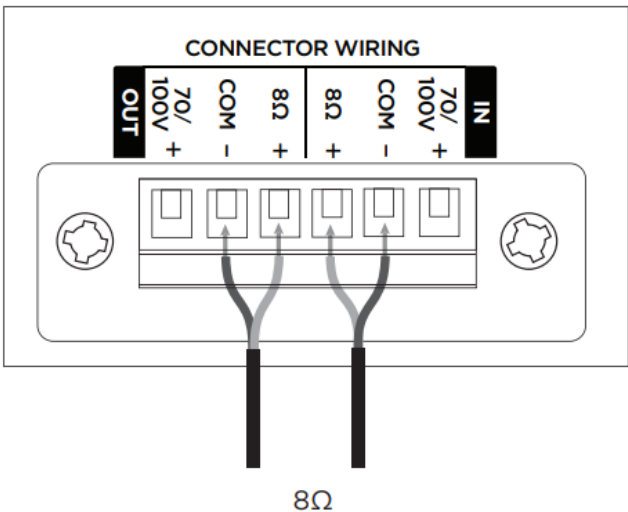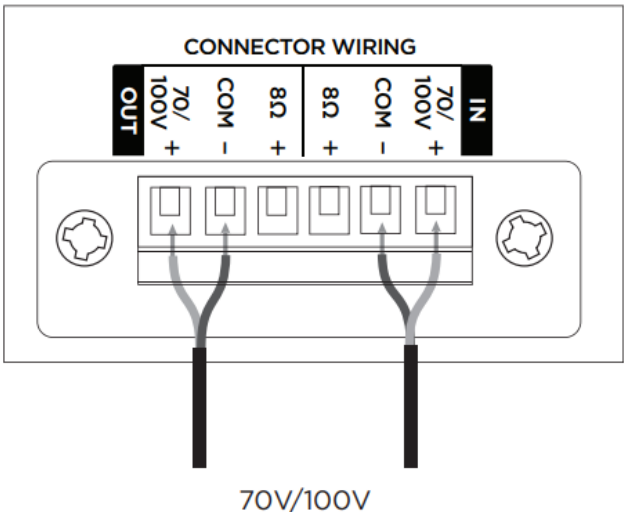

Loudspeaker Settings

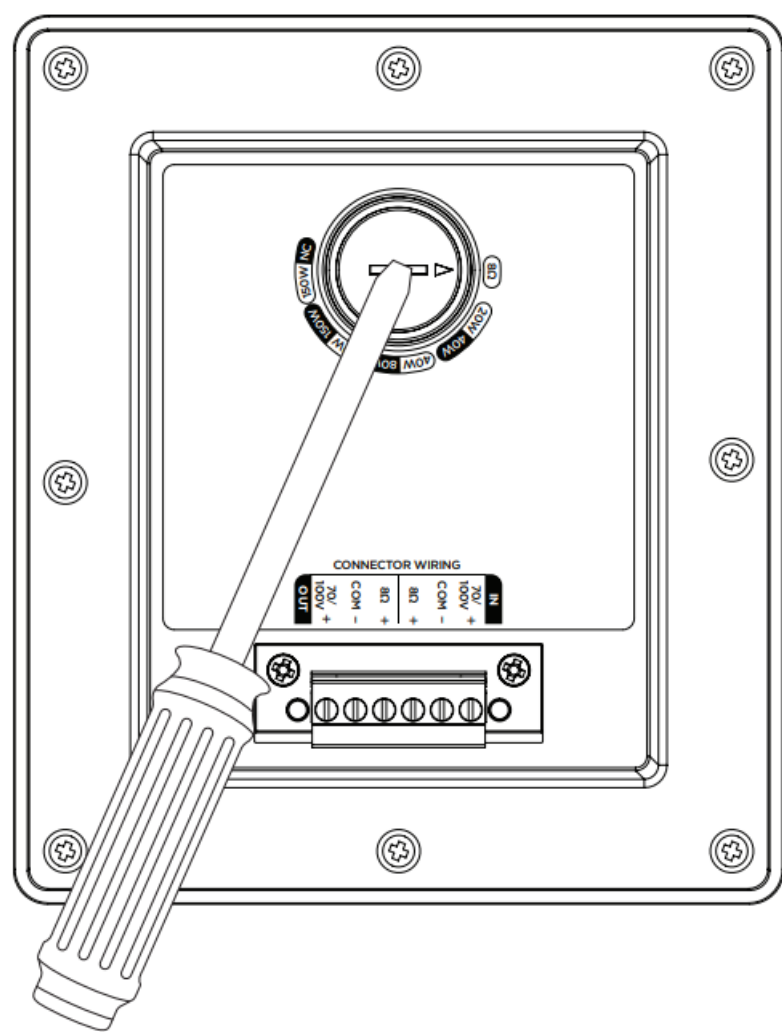

70V				
40W	40W	80W	150W*	8Ω
20W	20W	150W	NC**	
100V				

* Factory default
** NC: No Connection (do not use)


Transformer Tap Setting

Set tap by turning. Use a flat head screwdriver.

Using a Safety Cable

Some regional construction codes require the use of a secondary method of securing loudspeakers to support structures to provide additional safety. Choose a mounting position, method, and hardware consistent with local building codes and regulations.

A safety cable can be attached to the loudspeaker using the threaded insert on the back of the enclosure. The insert is sized for an M8 screw (not included) with a depth of 15 millimeters (0.59 inches).

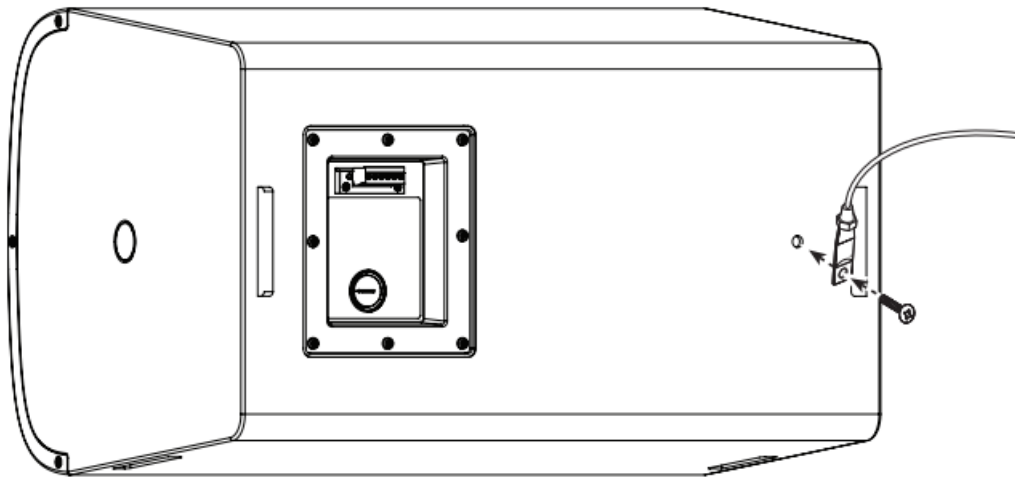

Installation Options

There are two pairs of slots used to secure the loudspeaker to the mounting bracket, located on the back and side of the loudspeaker. There are two different loudspeaker mounting positions: horizontal and vertical. See the table to the right to choose the installation option best suited for your installation.

Note: Installation in close proximity to cooking surfaces where the loudspeaker may be directly exposed to cooking oils, such as in commercial cooking environments, may decrease the performance or functionality of the loudspeaker.


		Loudspeaker Orientation	
		Horizontal	Vertical
Bracket Orientation	Back	<p>Attach to wall</p>	<p>Attach to wall</p>
	Side	<p>Attach to ceiling</p>	<p>Attach to wall</p>

Installing the Bracket

Note: When choosing an installation location, at least one of the mounting bracket's attachment points must be secured to a support structure. Attachment points not secured to a support structure must be secured using appropriate hardware for the installation. Choose fasteners that are consistent with all local building codes and requirements.


Note: Choose appropriate fasteners to support the weight of the loudspeaker (16.10 kg [35.5 lb]).

1. Mark the drill holes.
2. Drill four holes (sized for appropriate fasteners) into the wall.
3. Secure the bracket to the wall with four screws (not included). Note: Use M6 or 1/4-inch sized screws.

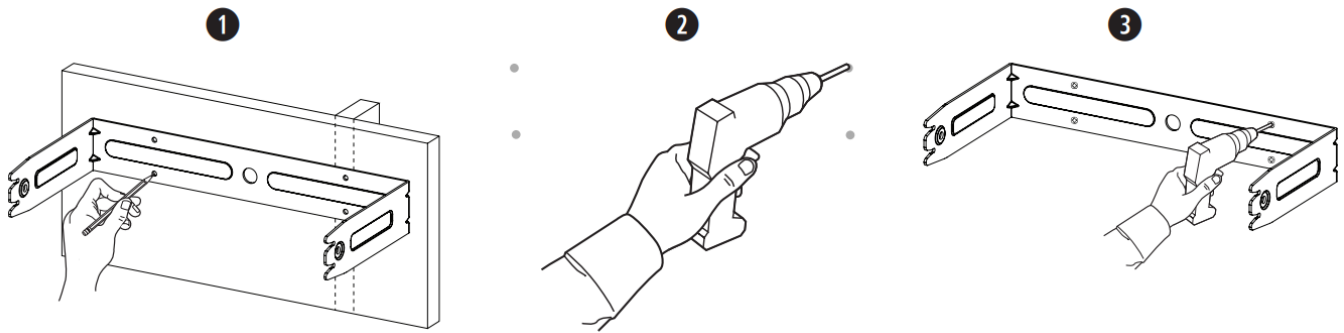

Wiring the Connector

1. Feed the wires through the center hole of the bracket.
2. Remove the connector from the loudspeaker.
3. Wire the connector. For wiring information, see **Wiring the Loudspeaker** on page 4.

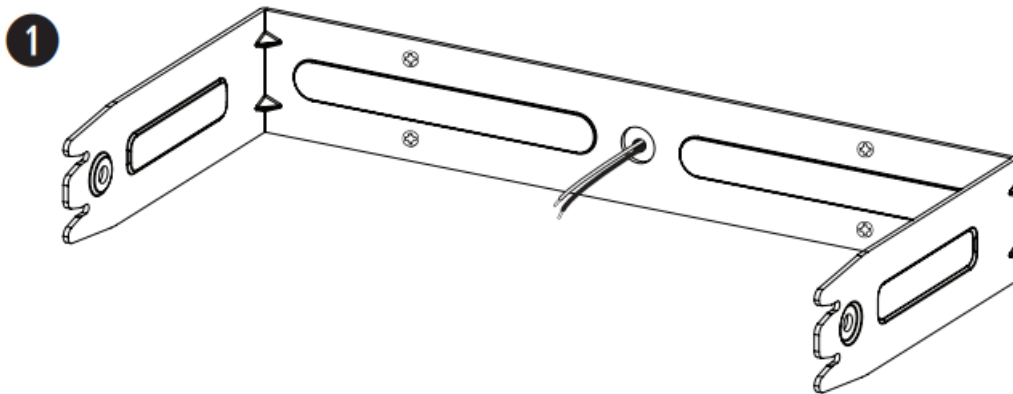

Installing the Loudspeaker




WARNING: Failure to follow the steps below could lead to an unsafe mounting condition, which could create a falling hazard.

Note: A 6-millimeter hex key is required for proper installation.

1. Attach the loudspeaker to the bracket by sliding the arms of the bracket into the slots on the loudspeaker, either on the back or side of the loudspeaker depending on your chosen loudspeaker position (see Installation Options on page 5).
2. Insert one of the included M8 screws into the hole on each side of the loudspeaker.
3. Tighten the screws using the hex key to secure the loudspeaker to the bracket.

4. Insert one rubber cap into the hole on each side of the loudspeaker.

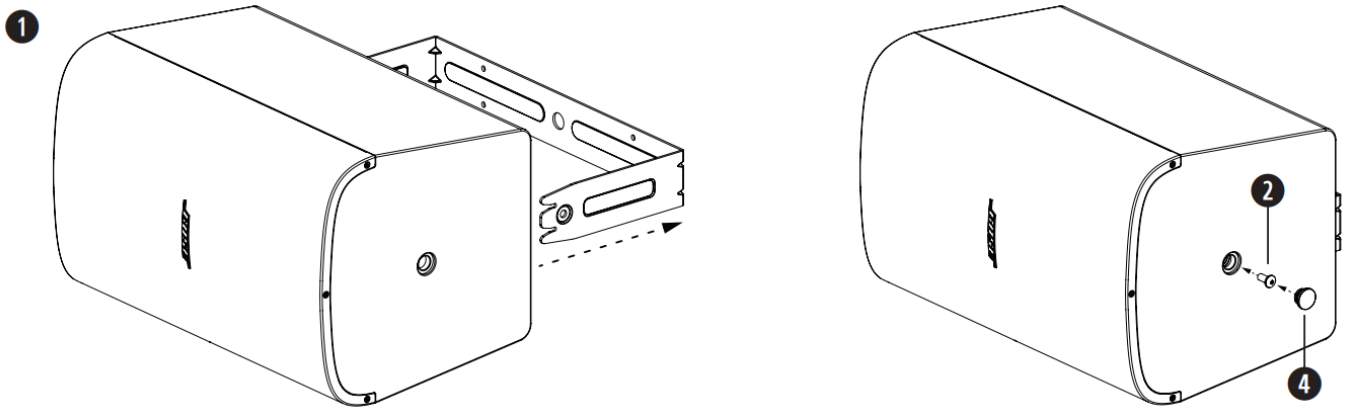


Rotating the Logo

You can rotate the Bose logo to align with your loudspeaker orientation. To rotate the logo, first remove the grille by removing the three screws on each side of the grille.

With one hand, press the button on the back of the grille. Rotate the logo with the other hand. The logo can be rotated clockwise or counterclockwise.

Once you've rotated the logo to your desired orientation, replace the grille and secure it into place with the six screws.

Note: Do not pinch the button inward unless you intend to remove the logo.

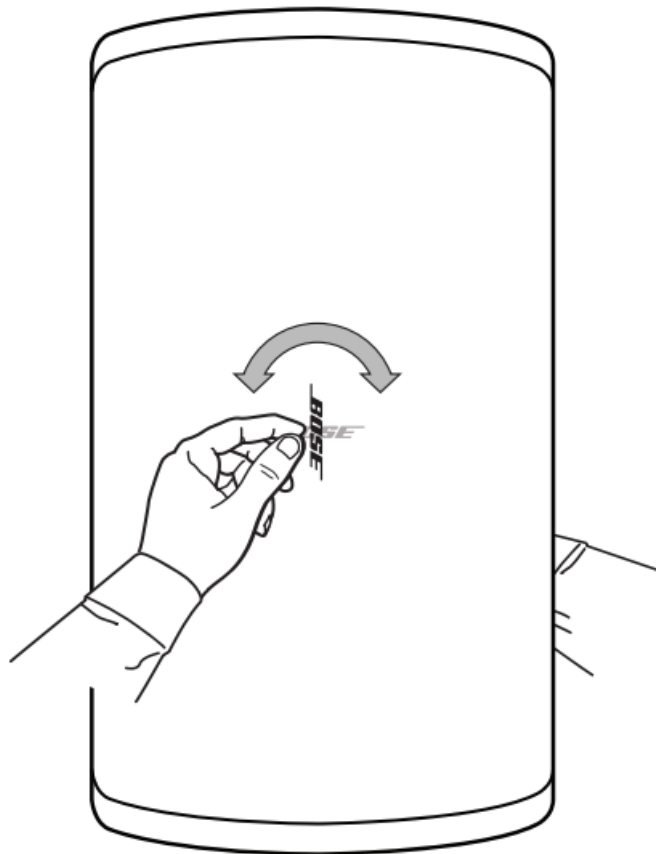

Safety and Regulatory Compliance

The Bose Design Max DM10S-SUB loudspeaker has passed testing and complies with the following specifications and uses:

Listed to ANSI/UL 1480A-2016, Speakers for Commercial & Safety Professional Use

General-Purpose Use – UL Category UEAY, File Number S 5591 Control Number 3N89

Suitable for installation using Class 1, Class 2, Class 3 wiring methods in accordance with NFPA 70, National Electrical Code, 2017, Article 640

The Design Max DM10S-SUB loudspeaker has been designed to the requirements defined in the following

European regulatory specification for combination systems:
Tested to IEC60268-5, 2007




837253-0020



PROFESSIONAL

©2021 Bose Corporation, All rights reserved.
Framingham, MA 01701-9168 USA
PRO.BOSE.COM
AM837253 Rev. 02
November 2021

Documents / Resources

 <p>DesignMax DM10S-SUB Surface-Mount Subwoofer</p> <table><tr><td>Model Number</td><td>DM10S-SUB</td></tr><tr><td>Product Category</td><td>Subwoofer</td></tr><tr><td>Product Line</td><td>DesignMax</td></tr><tr><td>Product Type</td><td>Surface-Mount Subwoofer</td></tr><tr><td>Product Code</td><td>837253-0020</td></tr></table>	Model Number	DM10S-SUB	Product Category	Subwoofer	Product Line	DesignMax	Product Type	Surface-Mount Subwoofer	Product Code	837253-0020	<p>BOSE DesignMax DM10S-SUB Surface-Mount Subwoofer [pdf] Installation Guide DesignMax DM10S-SUB Surface-Mount Subwoofer, DesignMax DM10S-SUB, Surface-Mount Subwoofer, Subwoofer</p>
Model Number	DM10S-SUB										
Product Category	Subwoofer										
Product Line	DesignMax										
Product Type	Surface-Mount Subwoofer										
Product Code	837253-0020										

References

-  [Bose Professional](#)
-  [Bose European Union Regulatory and Compliance Information](#)