


# **BOSE DesignMax DM3P Pendant Loudspeaker Installation** Guide

Home » Bose » BOSE DesignMax DM3P Pendant Loudspeaker Installation Guide 🖔





#### **PROFESSIONAL**

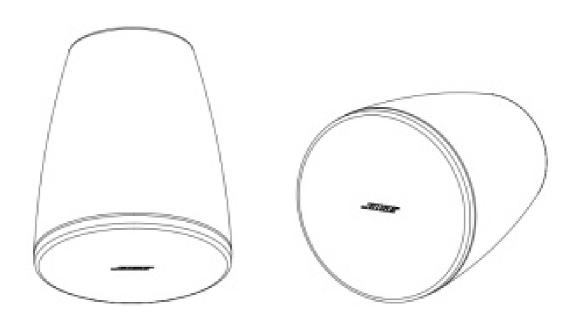

DesignMax DM3P **Pendant Loudspeaker** 

#### **Contents**

- 1 Important Safety Instructions
- 2 Cable-specific Warnings:
- 3 Package Contents
- **4 Product Dimensions**
- **5 Technical Specifications**
- 6 Setup
- 7 Loudspeaker Settings
- 8 Preparing the Installation
- 9 Mounting the Loudspeaker
- 10 Documents / Resources
  - 10.1 References
- 11 Related Posts

## **Important Safety Instructions**

## Please read and keep all safety and use instructions.

This product is intended for installation by professional installers only! This document is intended to provide professional installers with basic installation and safety guidelines for this product in typical fixed-installation systems. Please read this document and all safety warnings before attempting installation.

Do not attempt to service this product yourself. Refer all servicing to authorized service centers, installers, technicians, dealers, or distributors. To contact Bose Professional or to find a dealer or distributor near you, visit **PRO.BOSE.COM**.

- 1. Read these instructions.
- 2. Keep these instructions.
- 3. Heed all warnings.
- 4. Follow all instructions.
- 5. Do not use this apparatus near water.
- 6. Clean only with a dry cloth.
- 7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- 8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produces heat.
- 9. Only use attachments/accessories specified by the manufacturer.



This product contains magnetic material. Consult your physician on whether this might affect your implantable medical device.

Contains small parts which may be a choking hazard. Not suitable for children under age 3.

- This product is intended for indoor use only.
- All Bose products must be installed in accordance with local, state, federal, and industry regulations. It is the
  installer's responsibility to ensure the installation of the loudspeakers and mounting system is performed in
  accordance with all applicable codes, including local building codes and regulations. Consult the local authority
  having jurisdiction before installing this product.
- Unsafe mounting or overhead suspension of any heavy load can result in serious injury or death, and property
  damage. It is the installer's responsibility to evaluate the reliability of any mounting method used for their
  application. Only professional installers with the knowledge of proper hardware and safe mounting techniques
  should attempt to install any loudspeaker overhead.
- Do not mount the product in locations where it may be exposed to water or condensation.
- Do not expose this product to dripping or splashing, and do not place objects filled with liquids on or near the product.
- Do not mount on surfaces that are not sturdy, or that have hazards concealed behind them, such as electrical
  wiring or plumbing. Ensure the bracket is installed by a qualified professional installer and in accordance with
  local building codes.
- Use only the hardware and accessories included or specified by Bose for use with DesignMax DM3P loudspeakers. For information on compatible accessories, see the product's technical data sheet at PRO.BOSE.COM.
- Keep the product away from fire and heat sources. Do not place naked flame sources, such as lighted candles, on or near the product.
- Do not make unauthorized alterations to this product.
- Do not expose loudspeaker or mounting components to any chemical substances that are not specified by Bose, including but not limited to lubricants, cleaning agents, contact sprays, or hydrocarbon-based solvents.
   Exposure to such substances can lead to degradation of the plastic material, resulting in cracking and creating a falling hazard.
- Clean speakers using only a dry cloth. Do not expose the loudspeaker to soap, detergent, mineral oil, alcohol, or other cleaning agents or chemicals.

#### Cable-specific Warnings:

- The cable is not intended for installation or use in indoor water facility areas (including, without limitation, indoor pools, indoor water parks, hot tub rooms, saunas, steam rooms, and indoor skating rinks).
- Do not use for liftings, such as a crane or pulley, or for hanging installations that include movement or dynamic behavior. Intended for hanging static loudspeakers only.
- Do not walk or stand on the cable installation.
- Do not paint the cable fastener or any other part of the cable assembly.
- If using a cable system not supplied by Bose, the working load limit must be equal to or greater than the supplied cable system. See **Technical Specifications** for Safe Working Load.
- Do not apply oil or any other lubricant to the cable fastener or any other part of the cable assembly.
- Never join two cables together. Only use one cable assembly per loudspeaker hang point.
- Only use the pendant suspension cable with Bose pendant loudspeakers.

#### **Product Ratings:**

Input Voltage: 70V/100V

Impedance: 8 Ω, 25 W

Current or Power: (70V): 3W, 6W, 12W, 25W; (100V): 6W, 12W, 25W

## **Regulatory Information**

This product conforms to all applicable EU directive requirements. The complete declaration of conformity can be found at: <a href="https://www.Bose.com/compliance">www.Bose.com/compliance</a>.



This symbol means the product must not be discarded as household waste and should be delivered to an appropriate collection facility for recycling. Proper disposal and recycling help protect natural resources, human health, and the environment. For more information on the disposal and recycling of this product, contact your local municipality, disposal service, or the shop where you bought this product.

## **China Restriction of Hazardous Substances Table**

Names and Contents of Toxic or Hazardous Substances or Elements							
	Toxic or Hazardous Substances and Elements						
Part Name	Lead ( Pb)	Mercury ( Hg)	Cadmium (C	Hexavalent ( CR(VI))	Polybrominated Biphenyl (PBB)	Polybrominated d iphenyl ether (PB DE)	
PCBs	Х	0	0	0	0	0	
Metal Parts	Х	0	0	0	0	0	
Plastic Parts	0	0	0	0	0	0	
Speakers	Х	0	0	0	0	0	
Cables	Х	0	0	0	0	0	

This table is prepared in accordance with the provisions of SJ/T 11364.

0: Indicates that this toxic or hazardous substance contained in all of the homogeneous m aterials for this part is below the limit requirement of GB/T 26572

X: Indicates that this toxic or hazardous substance contained in at least one of the homog eneous materials used for this part is above the limit requirement of GB/T 26572.



#### **Taiwan Restriction of Hazardous Substances Table**

Equipment name: DesignMax DM3P, Type designation: 841165						
	Restricted substances and their chemical symbols					
Unit	Lead ( Pb)	Mercury ( Hg)	Cadmium (C d)	Hexavalent c hromium (Cr +6)	Polybrominated biphenyls (PBB)	Polybrominated Bi phenyl ethers (PB DE)
PCBs	_	О	0	0	0	0
Metal Parts	_	0	О	О	0	0
Plastic Parts	О	О	О	О	О	О
Speakers	_	0	0	0	0	0
Cables	_	0	0	0	0	0

**Note 1: "0"** indicates that the percentage content of the restricted substance does not exceed the percentage of the reference value of presence.

**Note 2:** The "-" Indicates that the restricted substance corresponds to the exemption.

Date of Manufacture: The eighth digit in the serial number indicates the year of manufacture;

"7" is 2007 or 2017.

China Importer: Bose Electronics (Shanghai) Company Limited, Part C, Plant 9,

No. 353 North Rising Road, China (Shanghai) Pilot Free Trade Zone

EU Importer: Bose Products B.V., Gorslaan 60, 1441 RG Purmerend, The Netherlands

Mexico Importer: Bose de México, S. de R.L. de C.V., Paseo de las Palmas 405-204, Lomas de

Chapultepec, 11000 México, D.F. For importer & service information: +5255 (5202) 3545 **Taiwan Importer:** Bose Taiwan Branch, 9F-A1, No. 10, Section 3, Minsheng East Road,

Taipei City 104, Taiwan. Phone Number: +886-2-2514 7676 Bose and DesignMax are trademarks of Bose Corporation.


Bose Corporation Headquarters: 1-877-230-5639

©2020 Bose Corporation. No part of this work may be reproduced, modified, distributed, or otherwise used without prior written permission.


#### **Warranty Information**

This product is covered by a limited warranty. For warranty details, visit **PRO.BOSE.COM**.

## **Package Contents**

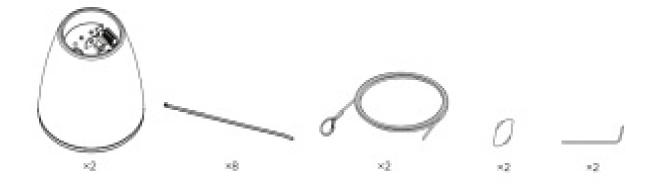

#### **Product Dimensions**

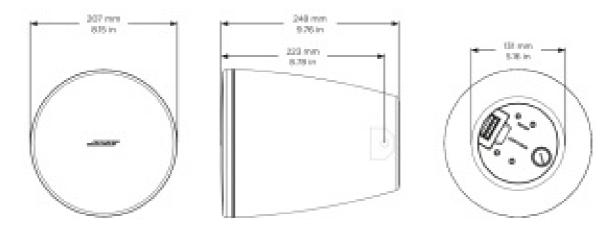

# **Technical Specifications**

For additional specifications, see the DesignMax DM3P technical datasheet at PRO.BOSE.COM.

Physical	
Product Dimensions	Bottom diameter: 207 mm (8.15 in)
	Height: 248 mm (9.76 in)
	Top diameter: 131 mm (5.16 in)
Cable Dimensions	Length: 4.57 m (15.00 ft)
	Diameter: 2 mm (0.08 in)
Max Load (Safe Working Load) <sup>1</sup>	45.36 kg (100.0 lb)
Net Weight, Loudspeaker (single)	2.51 kg (5.53 lb)
Shipping Weight (pair)	7.00 kg (15.43 lb)
Operating Temperature Range	0 °C to 50 °C (32 °F to 122 °F)
Color	Black (similar to RAL 9005); White (similar to RAL 9003)
Paintable	Choose a paint that is specifically designed for use with polypropyl ene (PP) plastics.
Environmental	Indoor Only

1. Always use the cable within its stated Safe Working Load. The included suspension cable has a Safe Working Load of 100 lbs.

# **Important Installation Information**



Before installing the loudspeaker, review **Important Safety Instructions** on page 2.

# **Safety and Regulatory Compliance**


The Bose DesignMax DM3P loudspeaker has passed testing and complies with the following specifications and uses:

- Listed to ANSI/UL 1480A-2016, Speakers for Commercial & Safety Professional Use
- General-Purpose Use UL Category UEAY, File Number S5591 Control Number 3N89
- Suitable for installation using Class 1, Class 2, Class 3 wiring methods in accordance with NFPA 70, National Electrical Code, 2017, Article 640

# Setup

## **Optional Installation Accessories**

- 1. Threaded Rod Adapter
- 2. Pendant Conduit Adapter

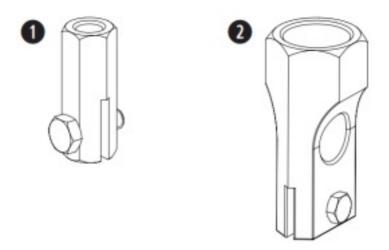


## Wiring the Loudspeaker

#### Wire Gauge


The DesignMax DM3P loudspeaker is designed to work with 18 AWG (0.8 mm²) to 14 AWG (2.1 mm²) size wire only.

## **Connection Diagrams**

Expose six millimeters (1/4 inch) of the bare wire to attach to the terminals.

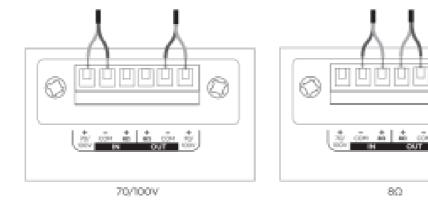

# **Loudspeaker Settings**

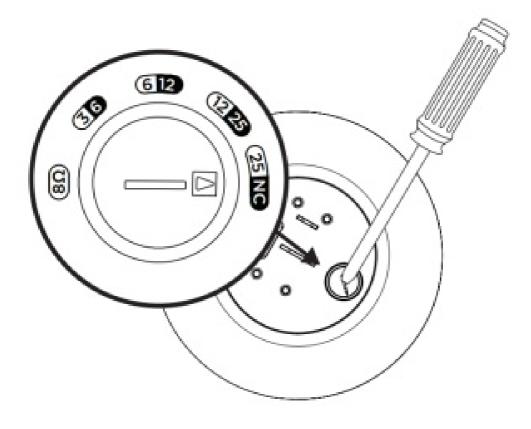

70V						
3w	6W	12W	25W*	8Ω		
6W	12W	25W	NC**	852		
100V						

<sup>\*</sup> Factory default

## **Transformer Tap Setting**

Set tap by turning. Use a flat head screwdriver.

# **Preparing the Installation**

## **Using a Safety Cable**


Some regional construction codes require the use of a secondary method of securing loudspeakers to support structures to provide additional safety. Choose a mounting position, method, and hardware consistent with local building codes and regulations.

Bose recommends using (A) a safety wire or (B) a safety cable as a secondary securing mechanism (not included). See the diagram to the right for safety attachment points.

The included suspension cable can be used as a safety cable when using the Threaded Rod Adapter or Pendant Conduit Adapter accessories.

Follow the manufacturer's instructions for any secondary securing mechanism implemented.


<sup>\*\*</sup> NC: No Connection (do not use)

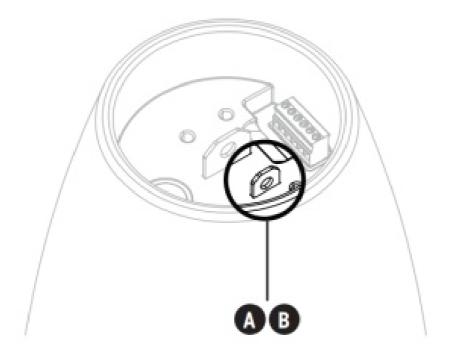



# Mounting the Loudspeaker

Before beginning installation, be sure to adjust your loudspeaker tap setting.


- 1. Insert the included suspension cable through the cable fastener and wrap the cable around a support structure; secure the cable using the cable fastener. **Note:** Arrows on the cable fastener indicate the cable direction.
  - A. To loosen the cable, insert the fastener tool into the release hole and adjust the cable.
- 2. Pull the loose end of the suspension cable to adjust the cable to the desired height.
- 3. Secure the cable clip to the center attachment point. Once you've reached the desired loudspeaker height, cut away any excess cable.
  - **Note:** Trim any frayed filaments with wire cutters after cutting to length.
- 4. Remove the connector, wire the connector, and reinsert the connector into the loudspeaker. For wiring information, see **Wiring the** 
  - The loudspeaker on page 4.
  - **Note:** If you intend to use a service loop, it can be stored in the loudspeaker recess at the top of the enclosure. Use the included cable ties to secure the wiring to the suspension cable.
- 5. Rotate the grille so the logo is in an orientation suitable for your installation.
  - **Note:** Do not remove the grille unless painting. Logo can be removed from the grille by peeling away from grille surface.




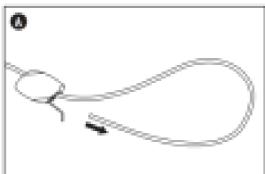









# PRO.BOSE.COM

Installation Guide • DesignMax DM3P



3538000



©2020 Bose Corporation, All rights reserved. Framingham, MA 01701-9168 USA


# PRO.BOSE.COM

AM860901 Rev. 00 October 2020



**PROFESSIONAL** 

**Documents / Resources** 

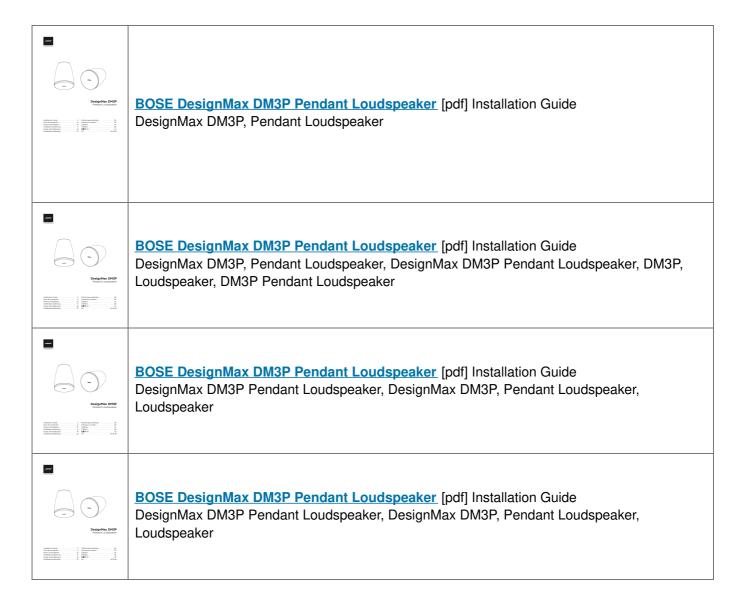

#### References

- Bose Professional
- Bose Speakers, Headphones, and Soundbars for Unmatched Audio Quality
- Bose European Union Regulatory and Compliance Information

Manuals+,