


bouncepad BP-LINKIPAD10B Adjustable Tablet Kiosk Ergonomically Flex Instruction Manual

[Home](#) » [bouncepad](#) » bouncepad BP-LINKIPAD10B Adjustable Tablet Kiosk Ergonomically Flex Instruction Manual 

bouncepad BP-LINKIPAD10B Adjustable Tablet Kiosk Ergonomically Flex

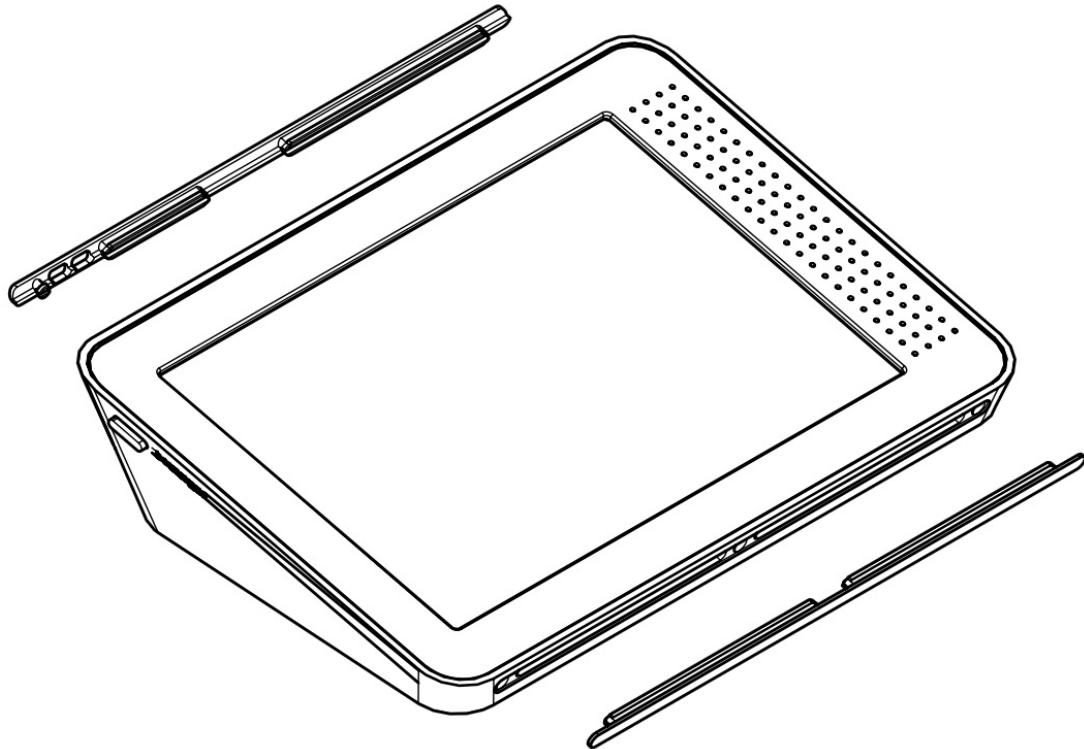

Contents


- [1 Tools Required to Fix From Above:](#)
- [2 In the Box](#)
- [3 Fixings List](#)
- [4 Assembly Instructions](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

Tools Required to Fix From Above:

- Drill + drill bits
- Pencil
- 16mm Hole Saw




In the Box

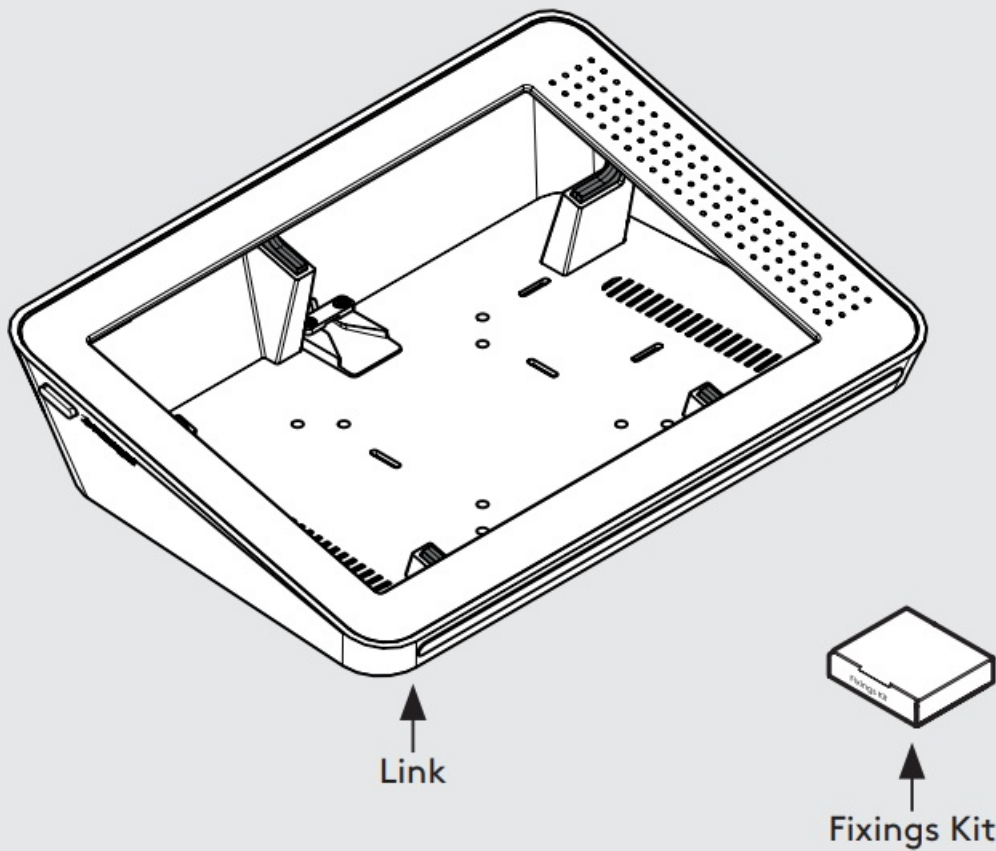




Fixings List

* Due to the modular nature of our product range you may receive additional fixings in the fixings kit

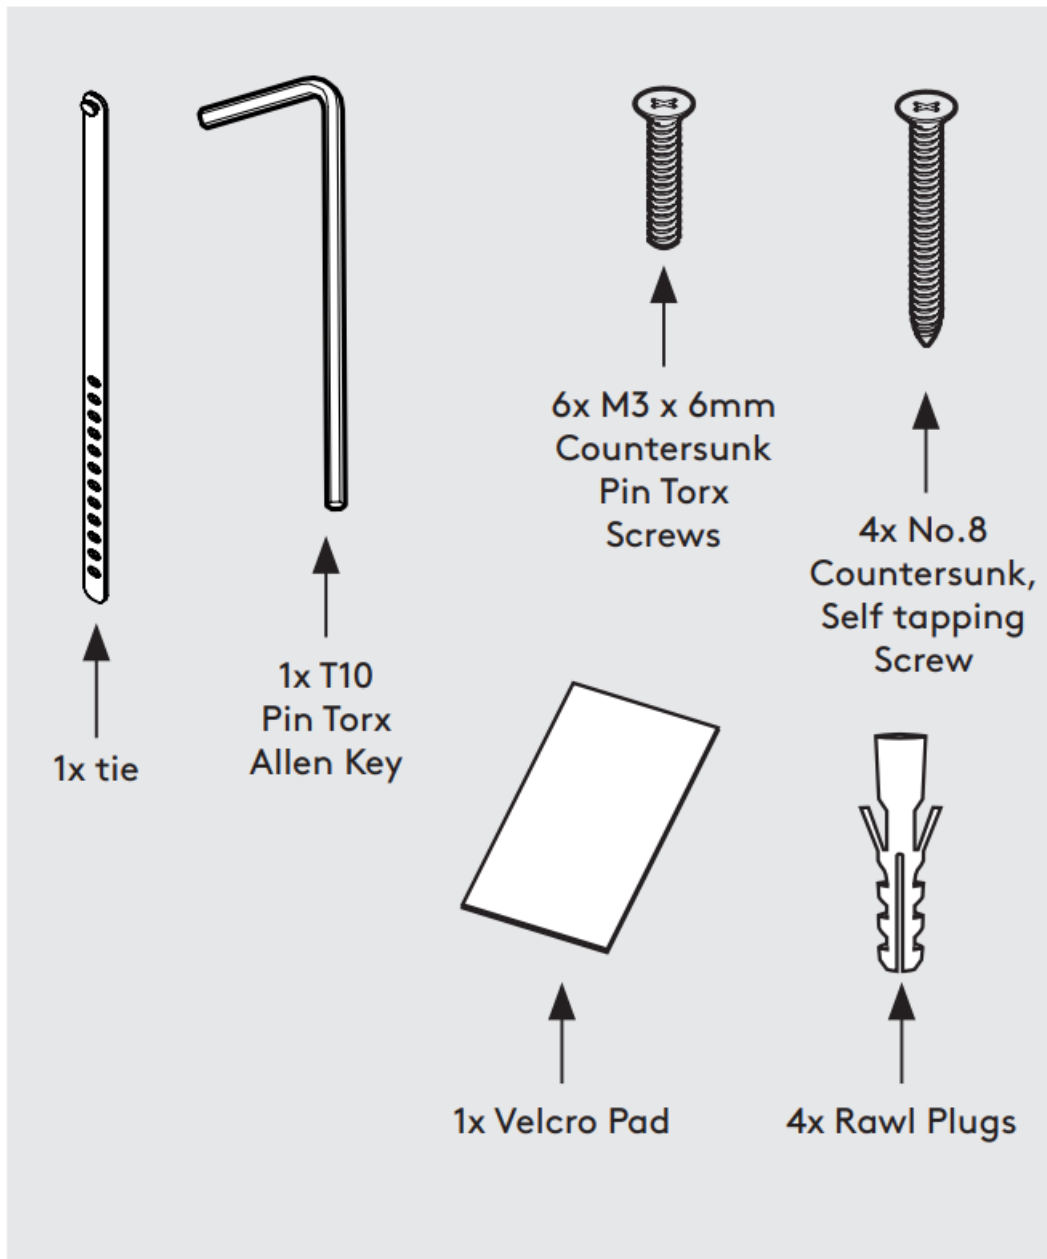


Assembly Instructions


1. Remove Front and Back Screw Covers.

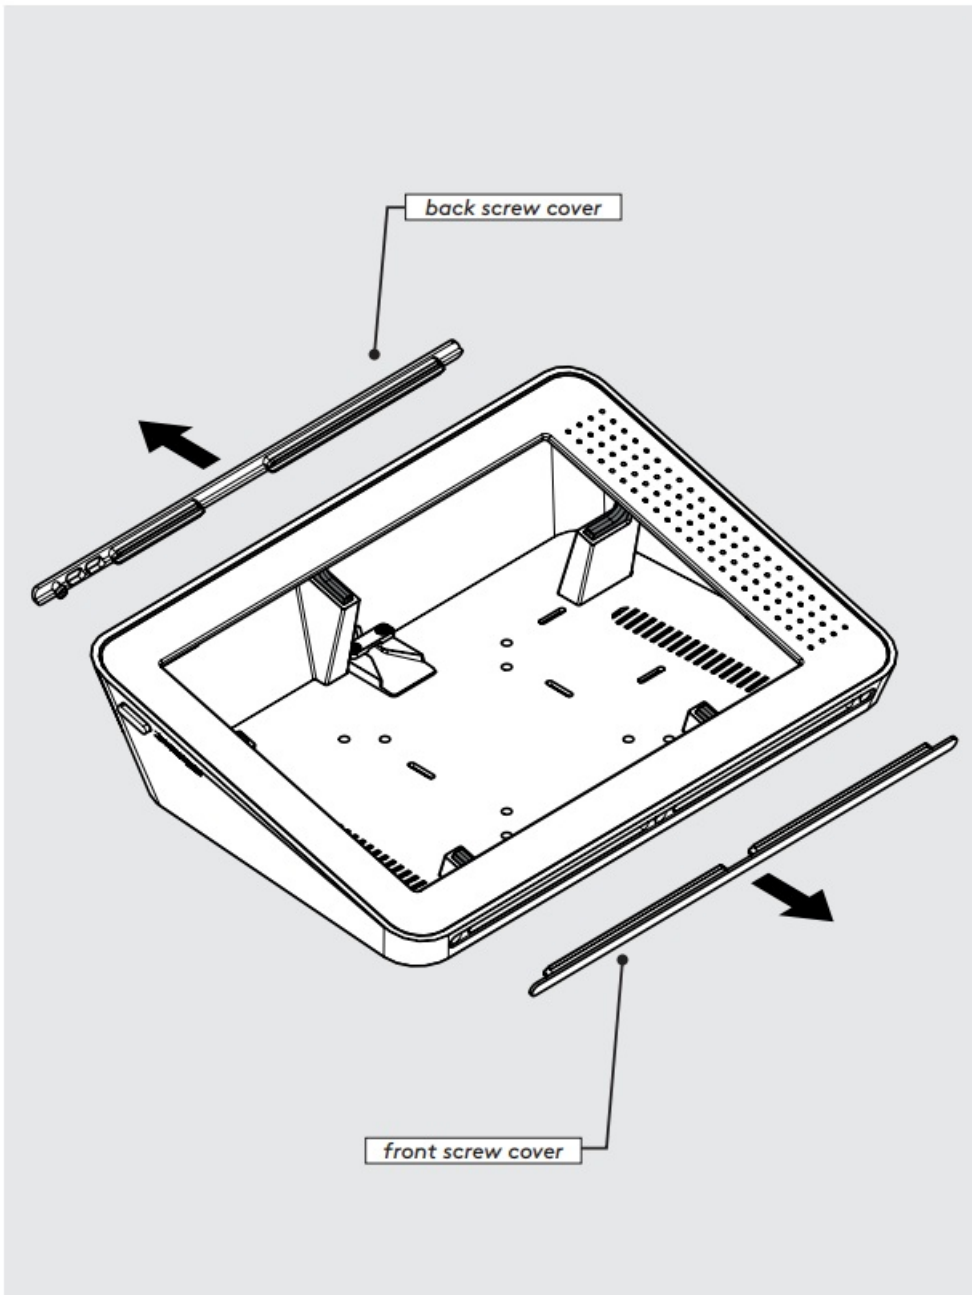


2. Remove Faceplate.

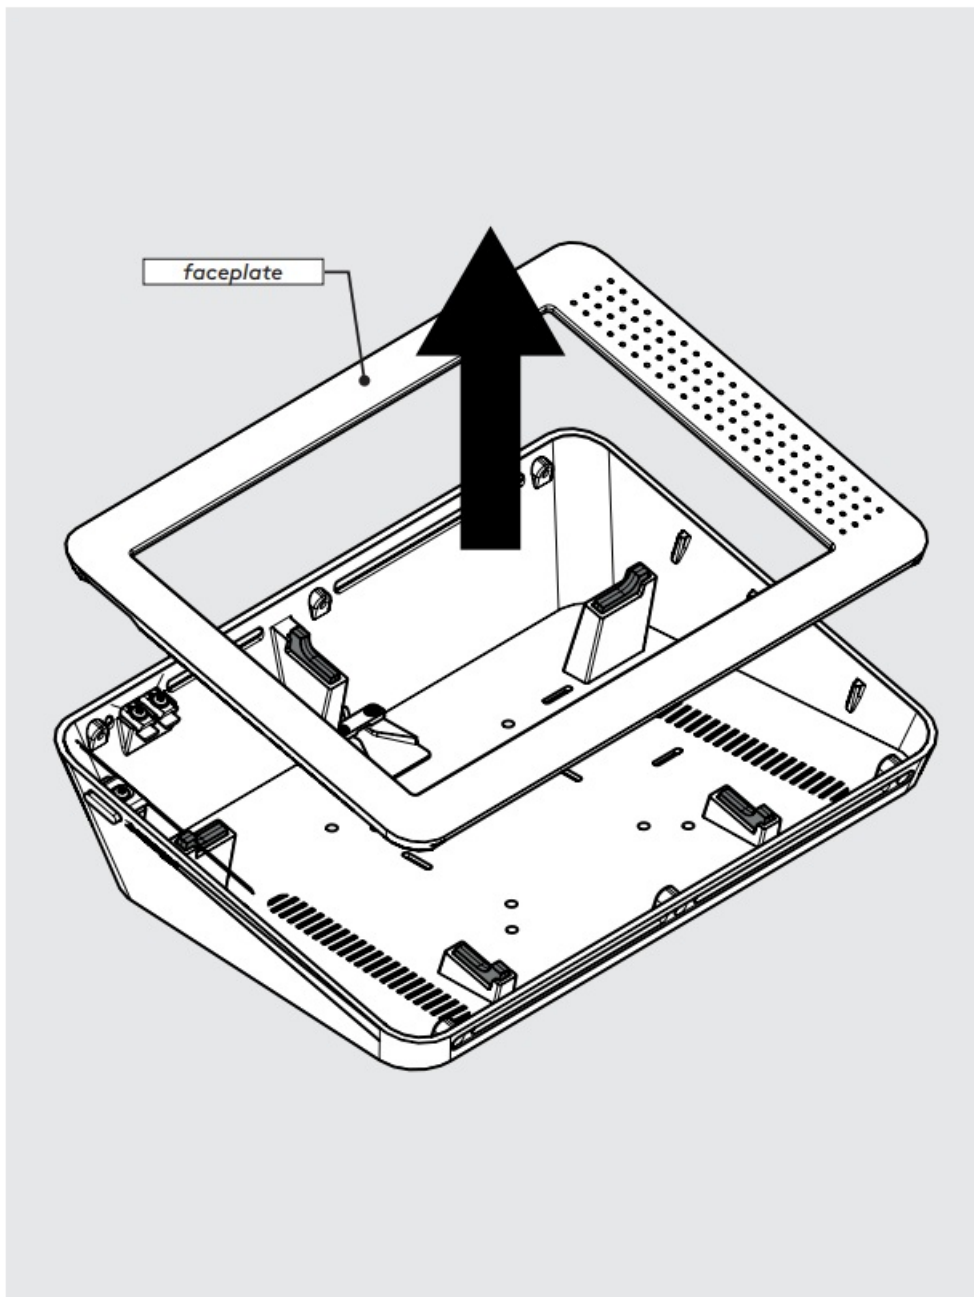


3. Remove Cable Lock.

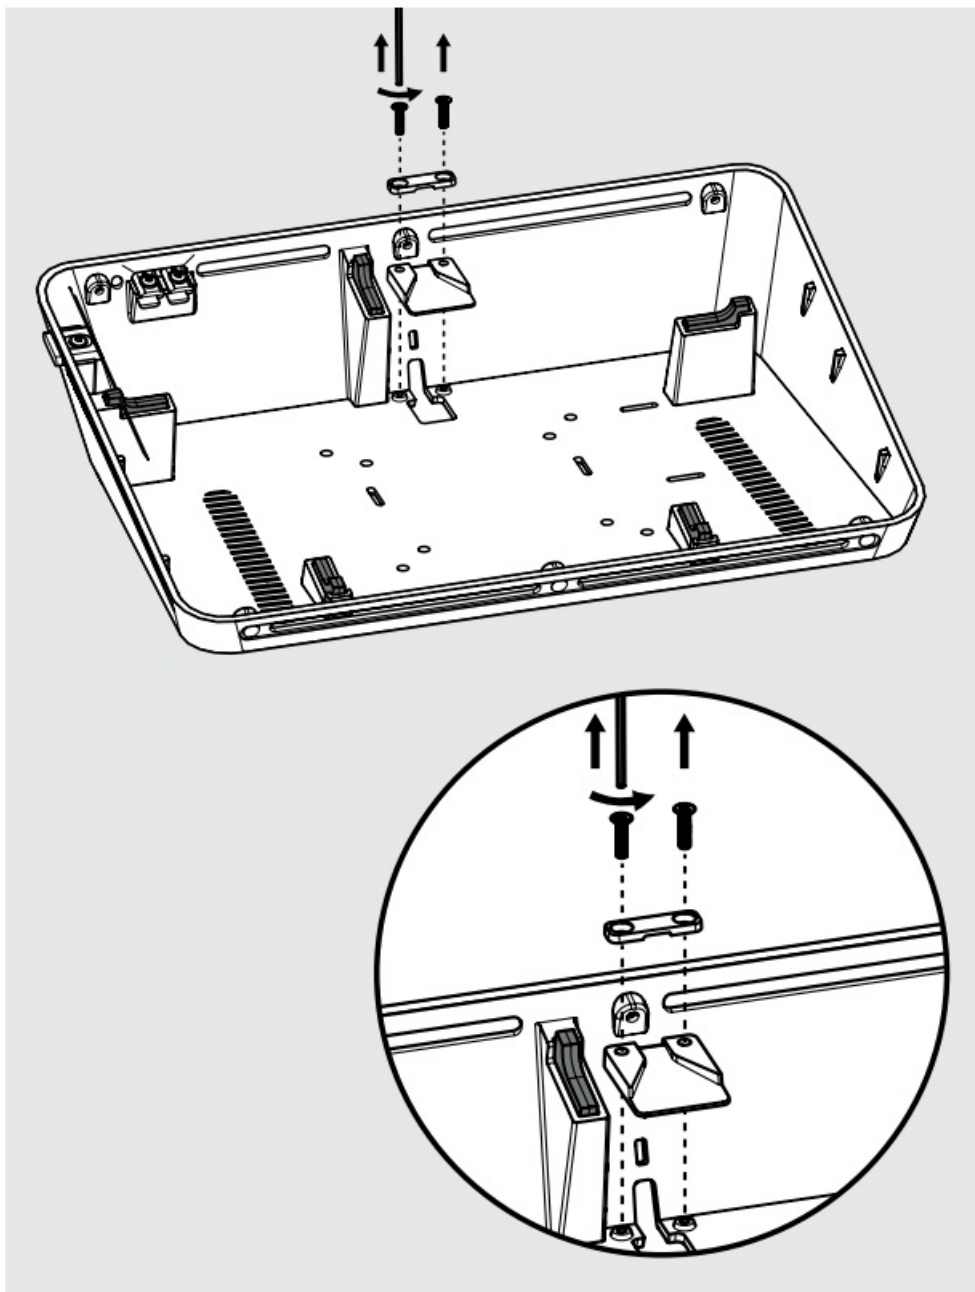


4. Select your PoE device and note it's location in relation to the mounting slots.

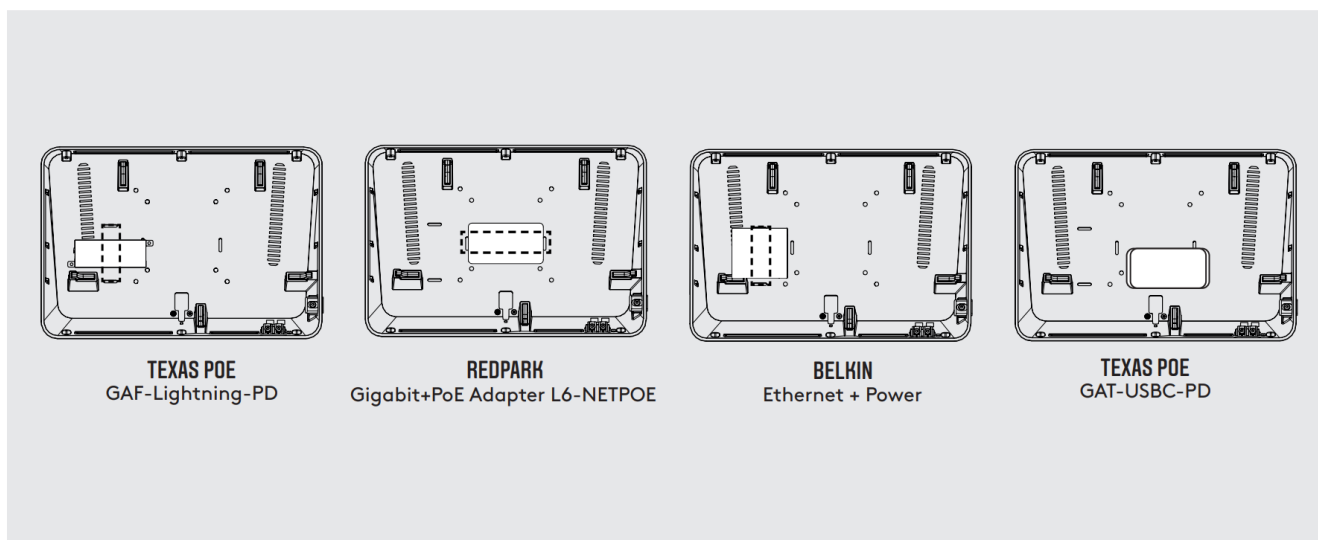


5. Insert the tie through the cable slots and then clasp over the POE device.

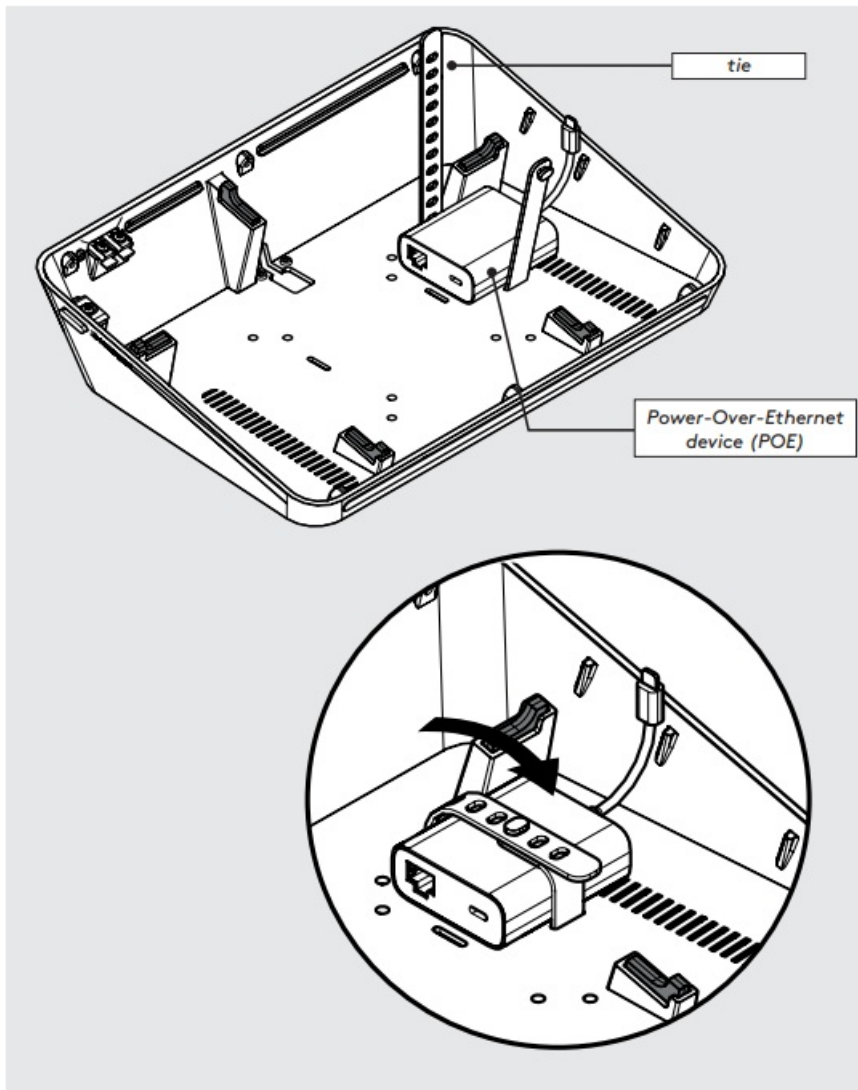


6. Specifically for Texas PoE GAT-USBPD use velcro pad for attachment.

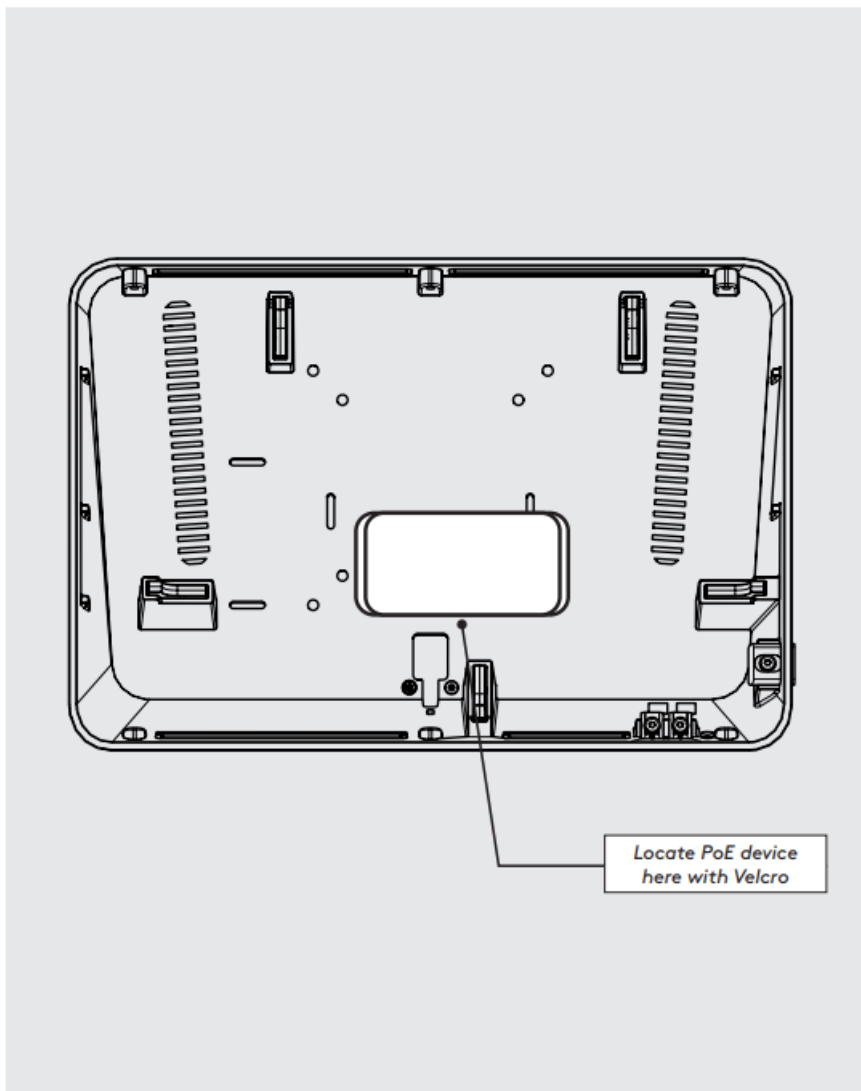

7. Feed the ethernet cable through the cable exit.

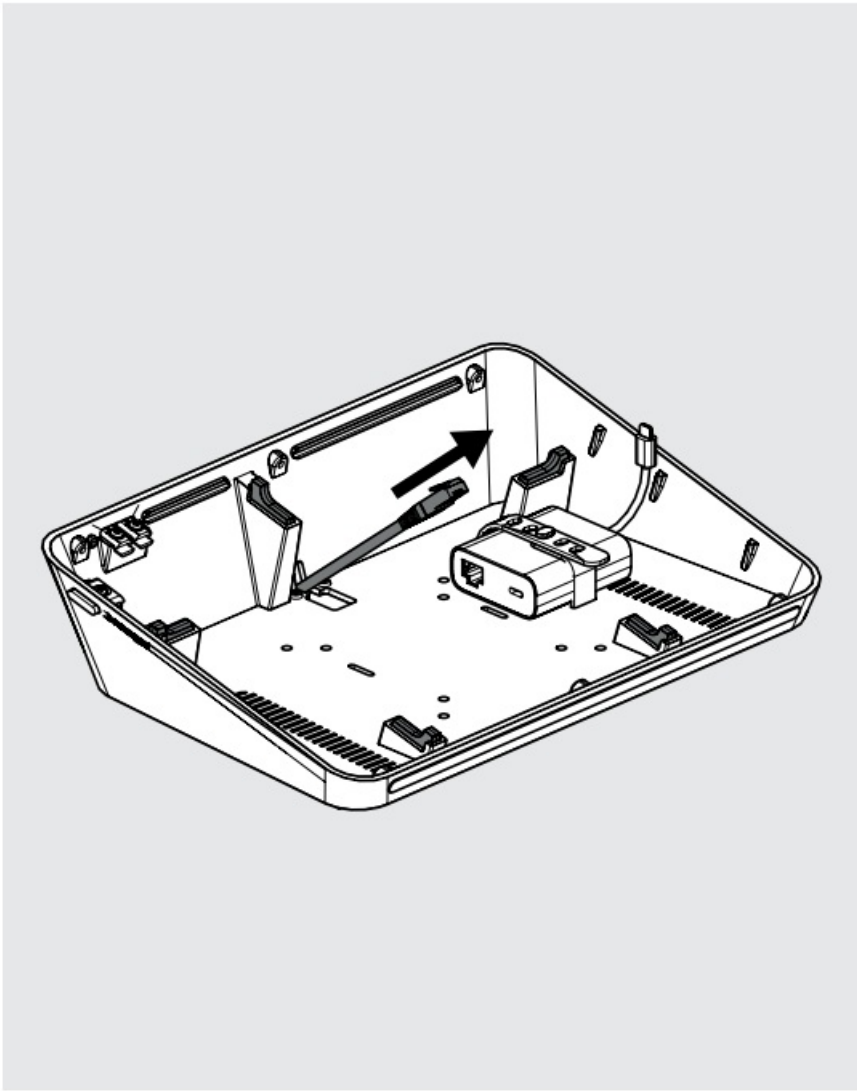


8. Connect the ethernet cable to the POE and secure the cable with the cable lock.

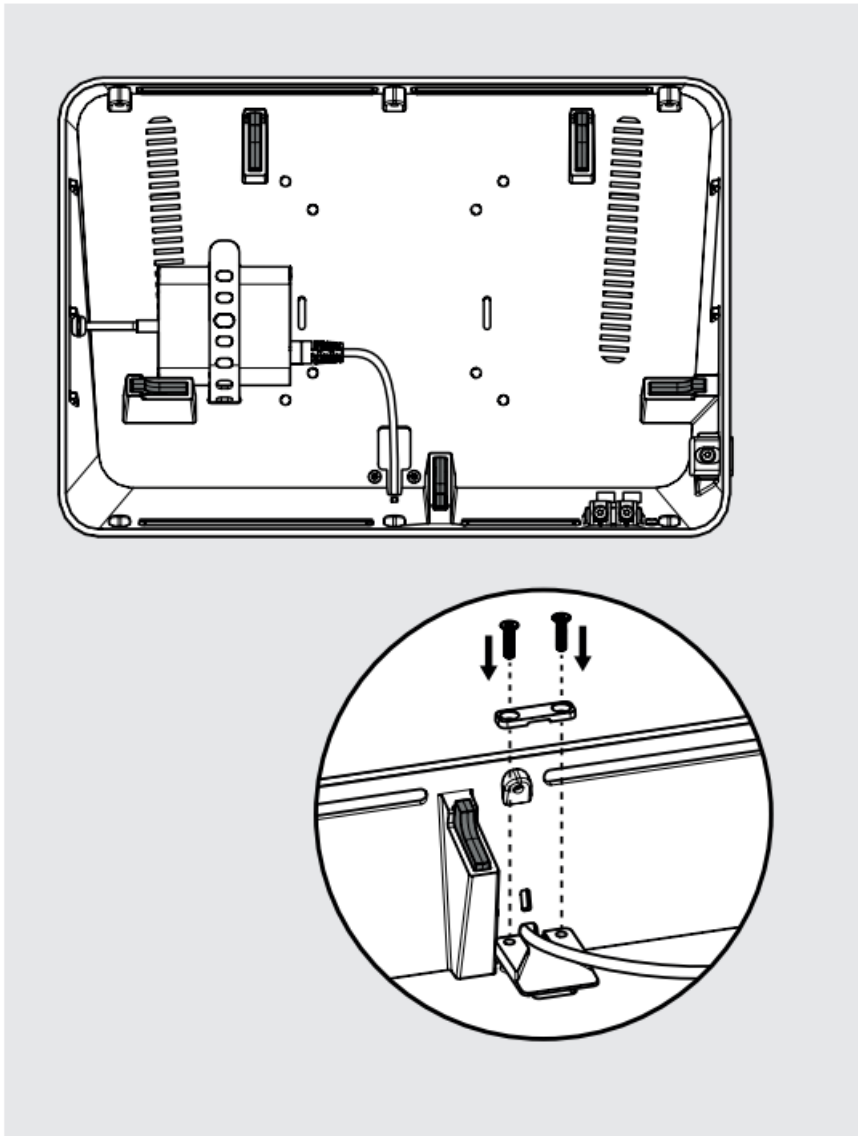


A1: Use a pencil to mark pilot hole locations.

MOUNT FROM ABOVE


Optional (skip to step 8 for freestanding)

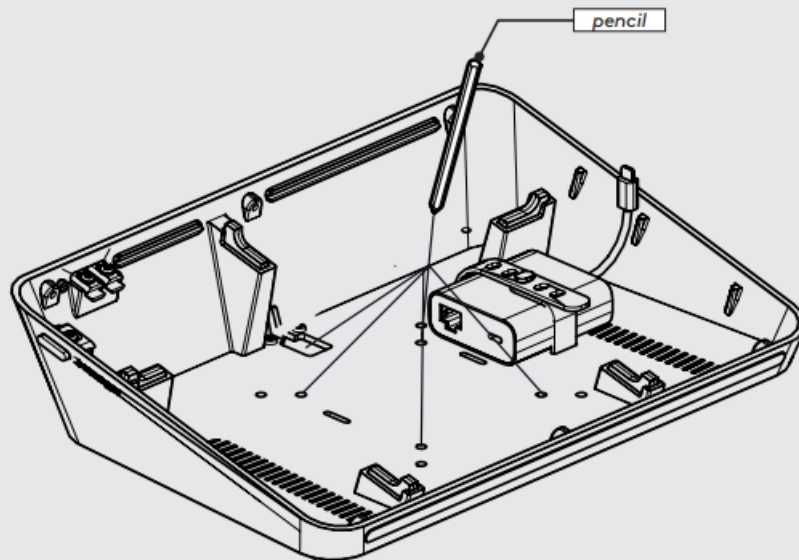


A2: Use a drill bit suitable for your surface and make 4x pilot holes.

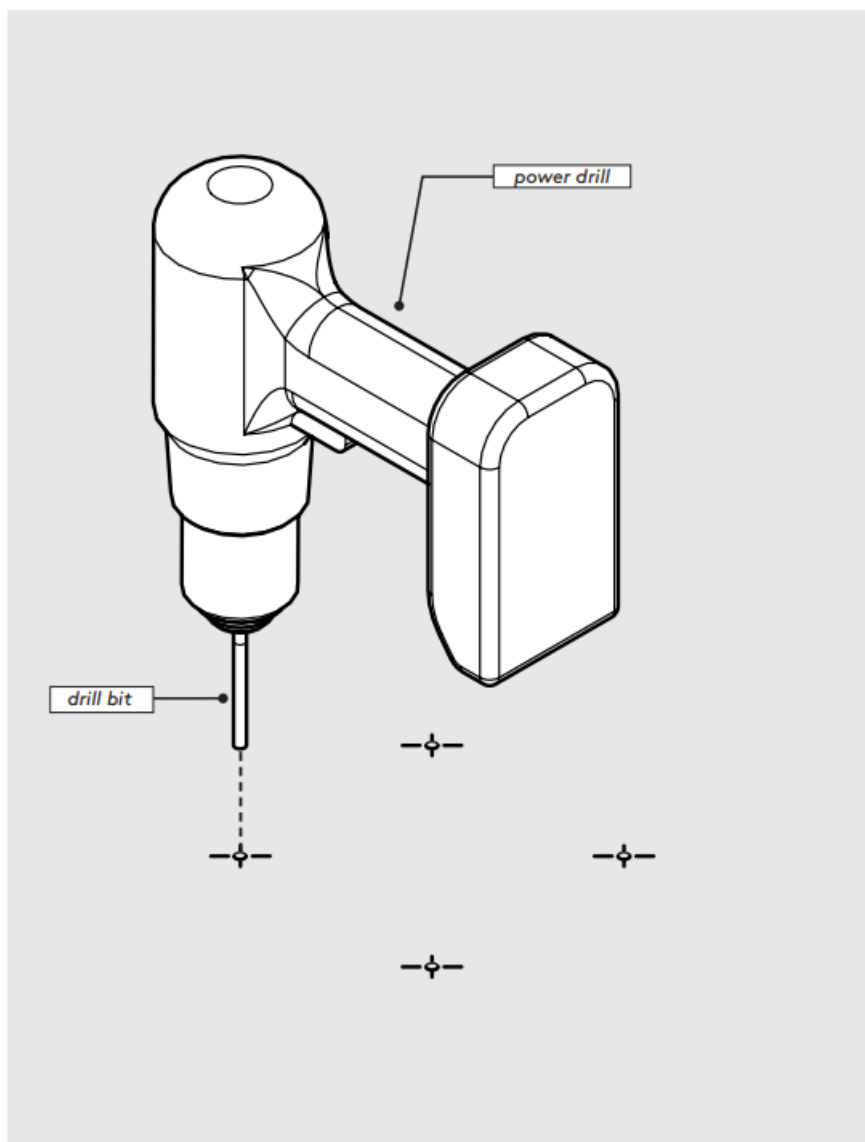


A3: If running a ethernet or USB cable through the surface use a hole saw in the cable exit position.

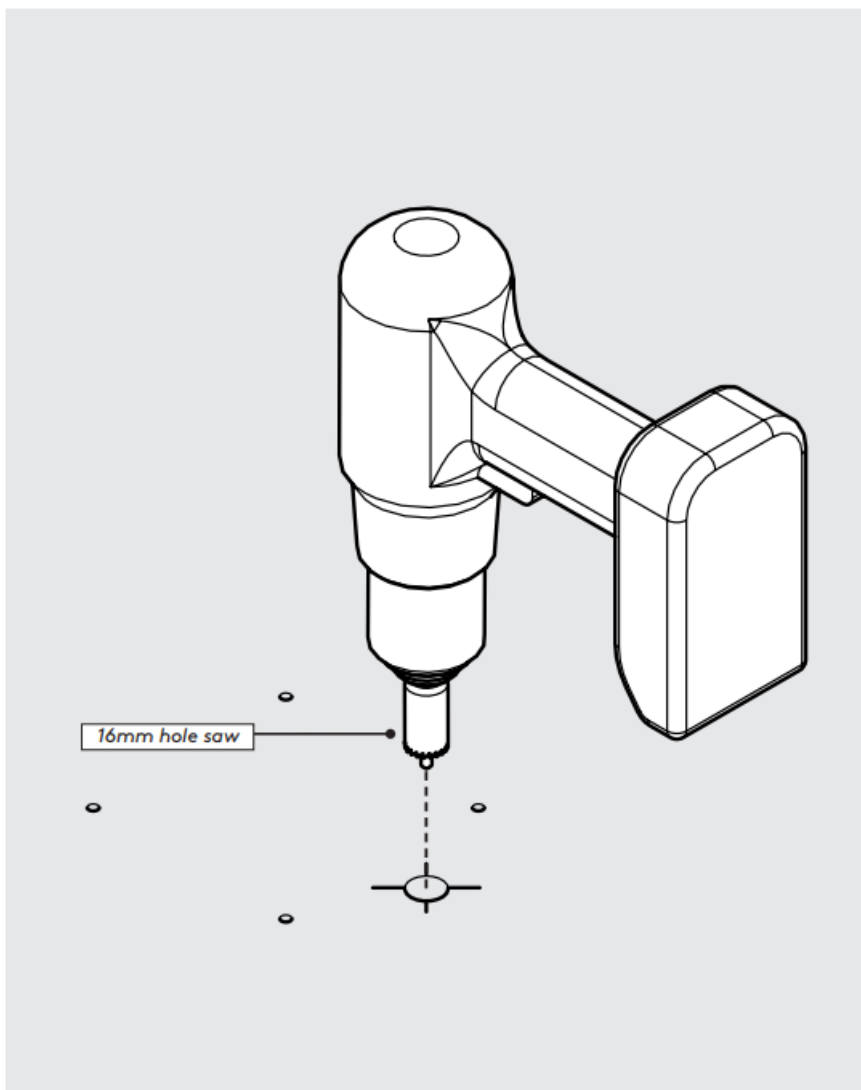


A4: Secure the Link to the surface with 4x No.8 Self tapping screws. Rawl plugs are provided if required.

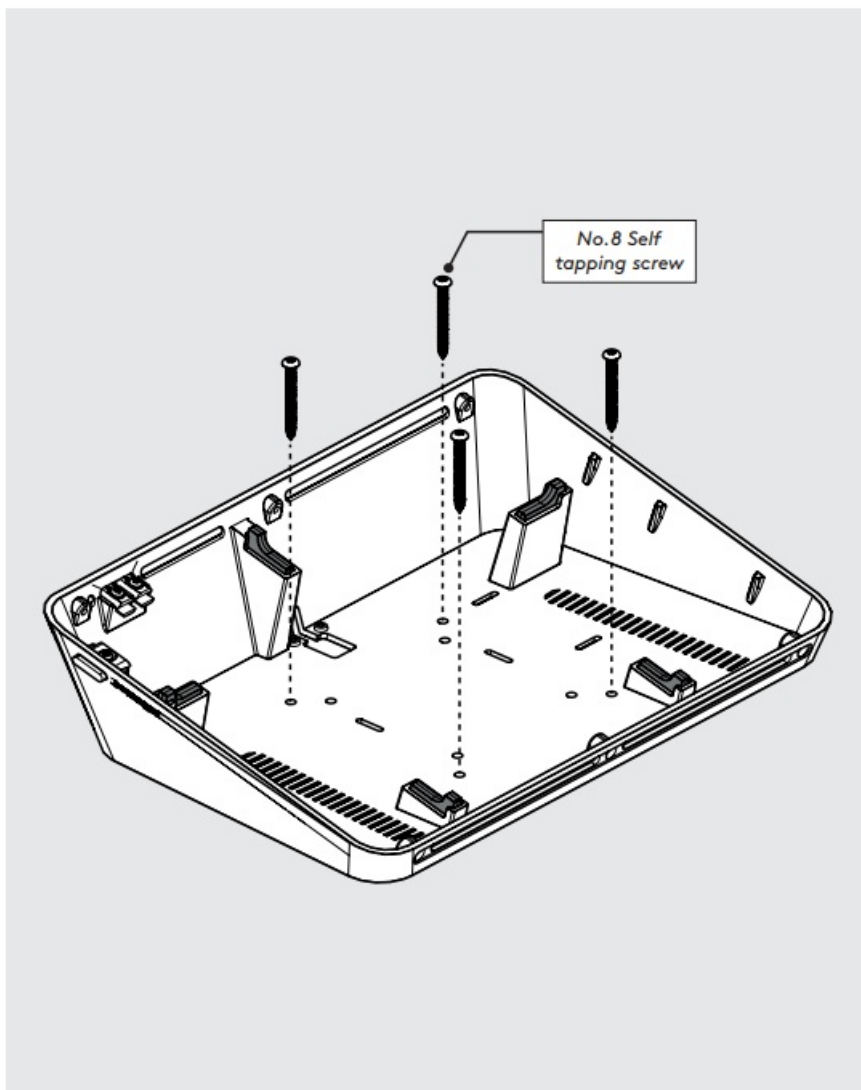


9. Connect the USB cable to the tablet, then place inside the enclosure. Reattach the faceplate.

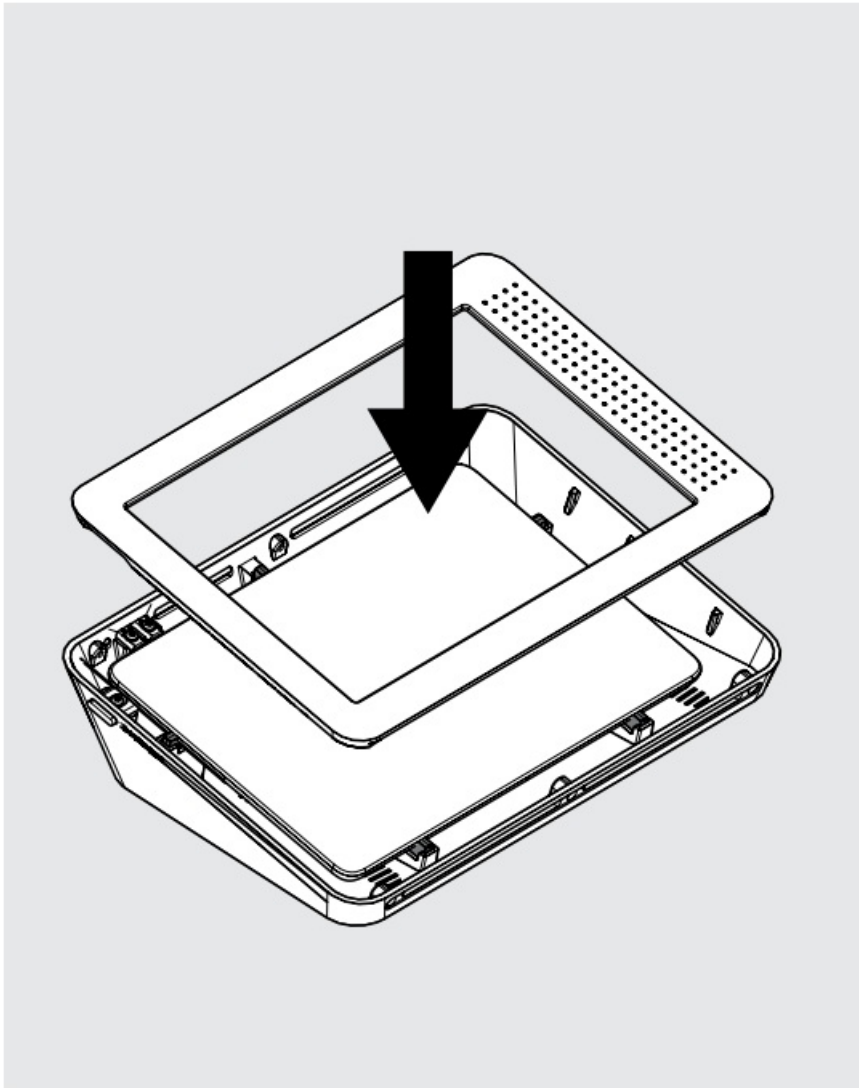


10. Use 6x M3 Screws to secure faceplate.

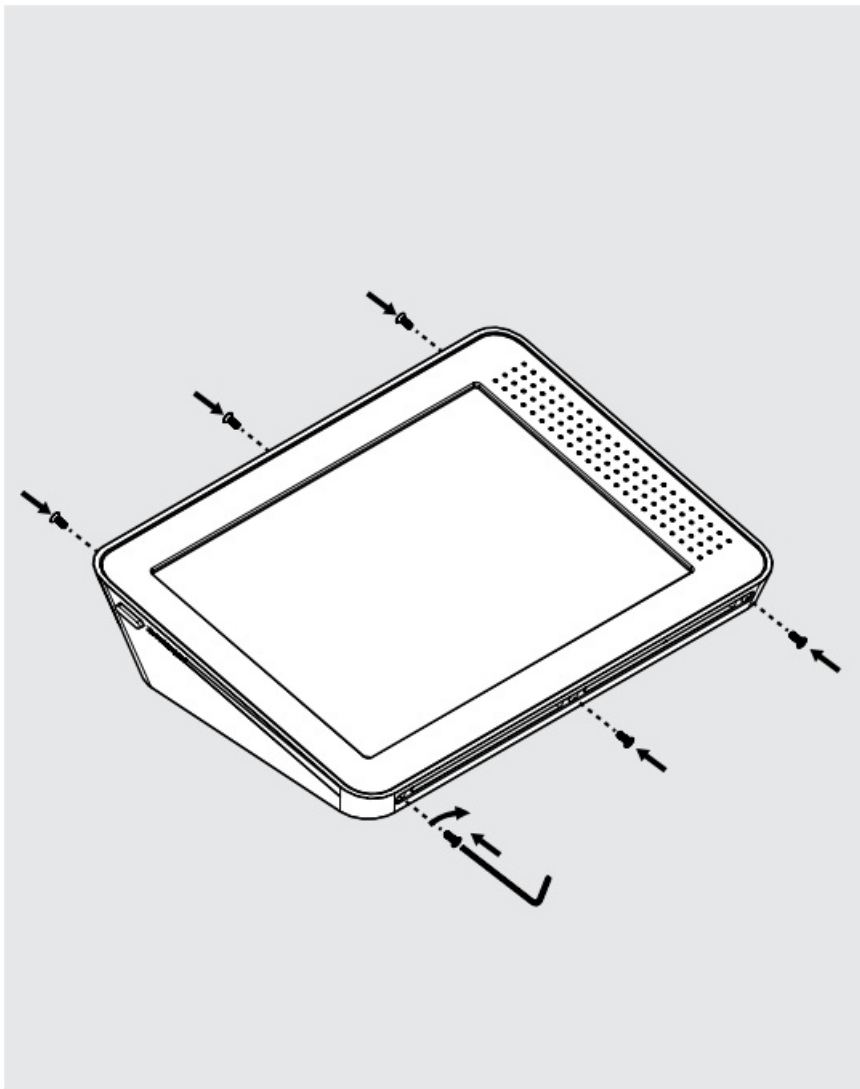


11. Reattach the front and back screw covers.

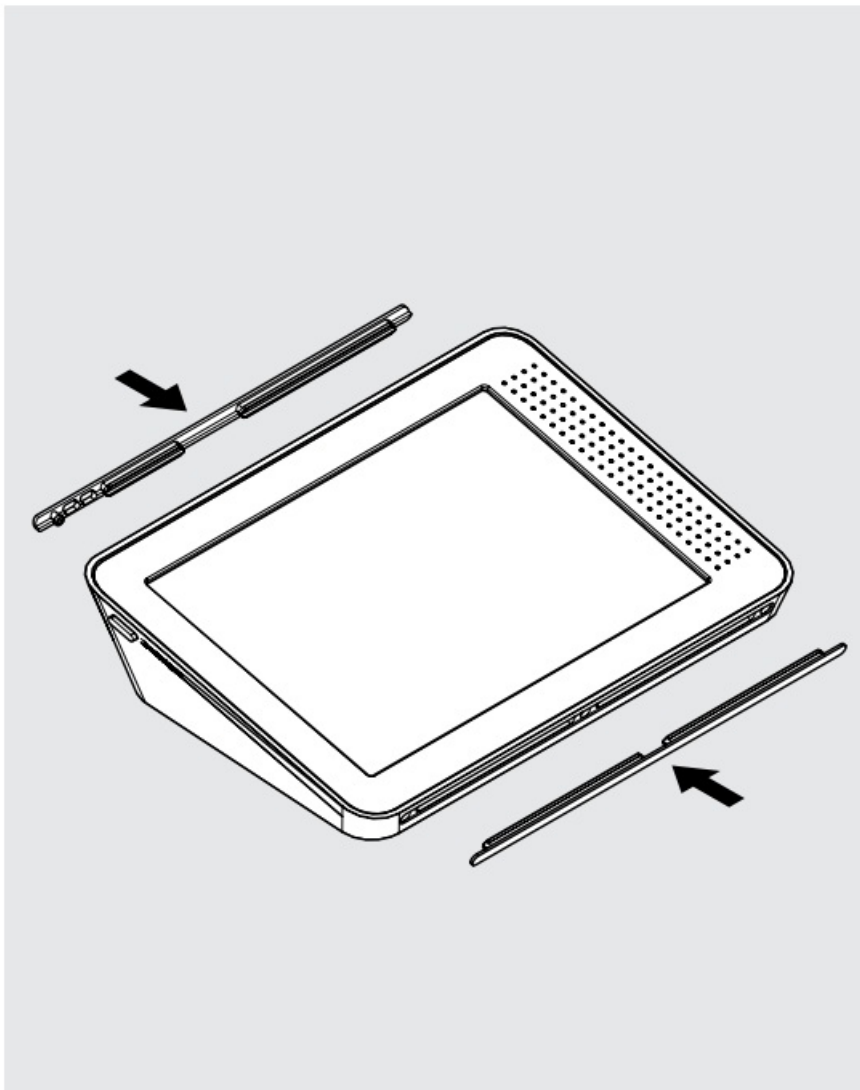

12. Set up the video-conferencing software and peripherals as per the provider's instructions.

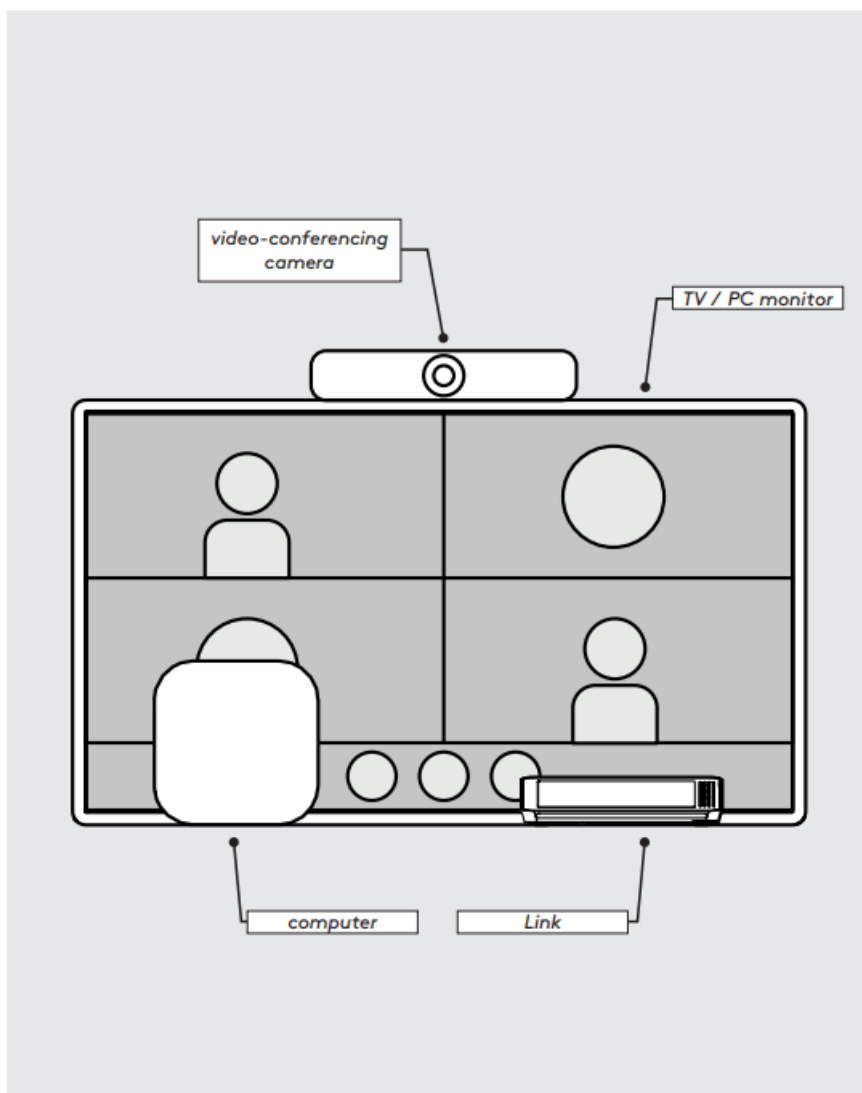


13. For additional security, tether your Link with a Kensington security cable. *Security cable not provided.

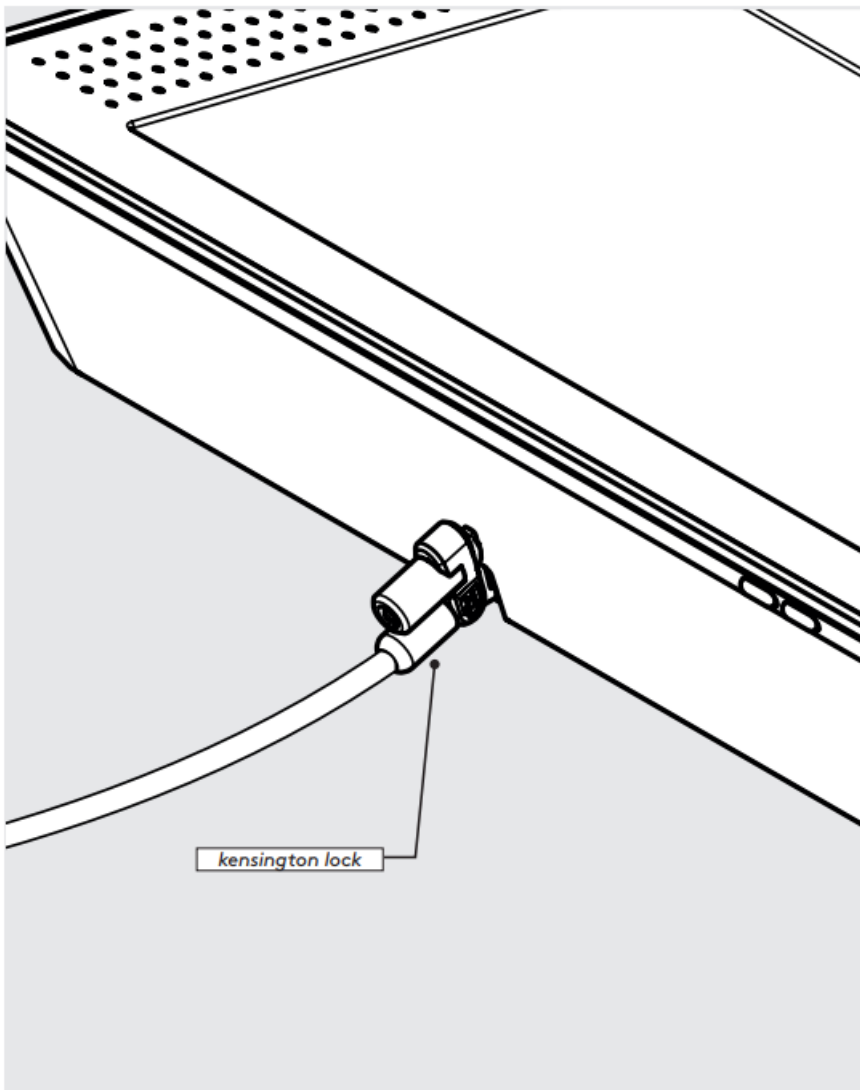

bouncepad®

Documents / Resources

	<p>bouncepad BP-LINKIPAD10B Adjustable Tablet Kiosk Ergonomically Flex [pdf] Instruction Manual</p> <p>BP-LINKIPAD10B Adjustable Tablet Kiosk Ergonomically Flex, BP-LINKIPAD10B, Adjustable Tablet Kiosk Ergonomically Flex, Tablet Kiosk Ergonomically Flex, Kiosk Ergonomically Flex, Ergonomically Flex, Flex</p>
---	---