




BuR 4932065T06040DN LED Linear Plug System Module Instructions

[Home](#) » [BuR](#) » BuR 4932065T06040DN LED Linear Plug System Module Instructions 



Linear Plug System | LED | 4000K | 65W | 60° | DALI | Tmax 45°C

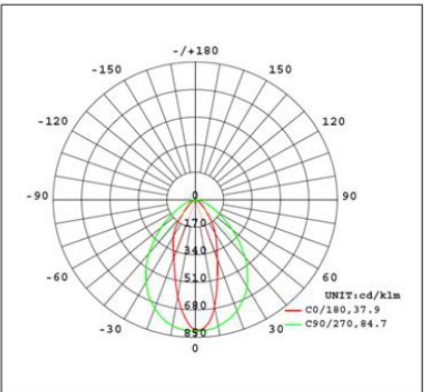



Contents

[1 4932065T06040DN LED Linear Plug System Module](#)

[2 Documents / Resources](#)


[3 Related Posts](#)

4932065T06040DN LED Linear Plug System Module

Designation Article No Housing Colour Optical Cover Reflector Beam Angle Installation Operating Temperature Lighting Control Application	IP54 I CE RoHS
Index of Protection Protection Class Certificates Labeling	1416 mm 68 mm 44 mm 2,2 kg 1563 x 70 x 42 mm
Length Width Height Weight Tragschiene	LED Everlight SMD 2835 300 LEDs 65W 10.400 lm 160 lm/W 4000 K Ra > 80 50000 h
Light Source LED Typology LED Quantity Wattage Luminous Flux Luminous Efficacy Light Colour Temperature Colour Rendering Index Life Span	Electronic 220 – 240 V 50 / 60 Hz 0.95 DALI
Power Supply Input Voltage Frequency Power Factor Dimming Technology	LED Linear Plug System Modul 4932065T06040DN Aluminium Weiss PMMA LED Platine 60° Pendel- / Fest-Montage -20° – +45° Optional Einzel- oder Lichtbandmontage

BuR Lighting
Bünthe & Remmler GmbH & Co. KG
Heedfelder Str. 61-63
58509 Lüdenscheid
Germany
Fon: +49 2351 96 36 65
Fax: +49 2351 96 92 48
Mobil: +49 152 238 97 612
Email: m.hoffmeister@bur.lighting

Documents / Resources



[BuR 4932065T06040DN LED Linear Plug System Module](#) [pdf] Instructions
4932065T06040DN LED Linear Plug System Module, 4932065T06040DN, LED Linear Plug System Module, System Module, Module

Manuals+