



CalAmp LMU-1230 Standard Single Mode GPS Tracker User Guide

[Home](#) » [CalAmp](#) » CalAmp LMU-1230 Standard Single Mode GPS Tracker User Guide 



LMU-1230 Standard Single Mode GPS Tracker
User Guide




Contents

- [1 LMU-1230 Standard Single Mode GPS Tracker](#)
- [2 LMU-1230™ Technical Specifications](#)
- [3 Satellite Location \(GNSS\)](#)
- [4 CALIFORNIA PROPOSITION 65](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

LMU-1230 Standard Single Mode GPS Tracker

A Cost Effective, Compact Vehicle Tracker with Essential I/O Capability and Ease of Installation

The LMU-1230™ is an economical, low-powered vehicle tracking device designed for hidden installations. An ideal solution for stolen vehicle recovery, auto rental, and other automotive track and trace applications, the LMU-1230 utilizes CalAmp's PEG™ engine and GPS for vehicle location and status.

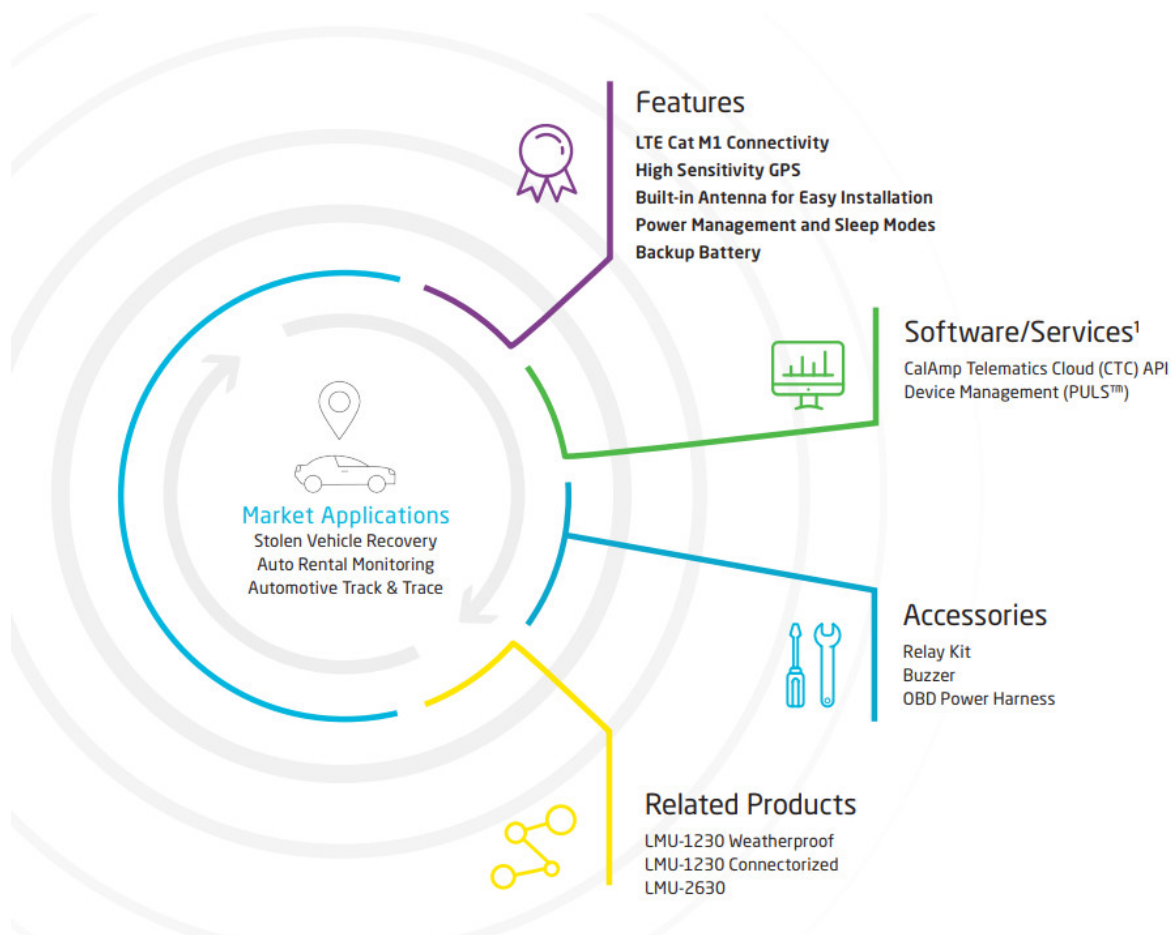

LMU-1230™ Technical Specifications

Cellular/Network

North American Variant I

LTE Cat M1-1900 (B2)/AWS 1700 (B4)/700 (B12)* MHz

North American Variant II

LTE Cat M1-AWS 1700 (B4)/700 (B13) MHz

Data Support

SMS, UDP Packet Data

Satellite Location (GNSS)

Constellation Support	GPS, GLONASS, SBAS Engine (WAAS, EGNOS, MSAS, GAGAN)
Channels	55 Channel
Tracking Sensitivity	-167 dBm
Acquisition Sensitivity	-157 dBm (hot start) -148 dBm (cold start)
Location Accuracy	~2.0m CEP Open Sky (GPS SBAS 24 hours static)
Location Update Rate	1 Hz
AGPS Location assistance capable	

Comprehensive I/O

Ignition Input	1 fixed bias
Digital Inputs	2 (high/low selectable 0-32 VDC)
Digital Outputs	3 (open collector relay 150mA)
Accelerometer	Built-in, triple-axis (motion sensing, tilt detection)

Certifications

Industry Certifications	FCC, IC, PTCRB
-------------------------	----------------

Cloud/Software Services¹

PULS™	Monitor, manage, upgrade firmware, configure and troubleshoot devices remotely
CTC	Device data stream via RESTful APIs

Edge Intelligence¹

PEG™	Behavioral Scripting (8-bit support)
------	--------------------------------------

Electrical

Operating Voltage	12/24 VDC Vehicle Systems 9-32 VDC (startup, operating) 7-32 VDC (momentary)
Power Consumption	Typical 750 uA @ 12V (deep sleep) Typical 12 mA @ 12V (radio-active sleep/idle) Typical 40 mA @ 12V (active tracking w/GPS and cell enabled)

Battery Pack

Battery Capacity	200 mAh
Battery Technology	Lithium-Ion
Charging Temperature	0° to +45° C

Environmental

Temperature	-30° to +60° C (connected to primary power) -10° to +60° C (operating on internal battery) -20° to +25° C ≤ 6 months (long-term storage with battery)
Humidity	95% RH @ 50° C non-condensing
Shock and Vibration	U.S. Military Standard 202G, 810F SAE J1455
ESD	IEC 61000-4-2 (4KV test)

Physical/Design

Dimensions	2.10 x 3.80 x .77" (53.4 x 96.6 x 19.5 mm)
Weight	3.95 oz. (112 g)

Connectors/SIM Access

GPS Antenna	Internal
Cellular Antenna	Internal
SIM Access	Internal (2FF SIM)

*Note: B17 is a subset of B12

¹ Subscription service enabled. Contact sales rep for additional details.

CALIFORNIA PROPOSITION 65



WARNING:

This product can expose you to chemicals including Carbon black and Nickel, which are known to the State of California to cause cancer, and Bisphenol A and 1,3-Butadiene, which are known to the State of California to

cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov




L1230KQ419DS V2-A

© 2020 CalAmp. All specifications are typical and subject to change without notice.
¹ Subscription service enabled. Contact sales rep for additional details.



CalAmp
15635 Alton Pkwy Ste 250
Irvine, CA 92618
888.3CALAMP
calamp.com

Documents / Resources

	<p>CalAmp LMU-1230 Standard Single Mode GPS Tracker [pdf] User Guide LMU-1230 Standard Single Mode GPS Tracker, LMU-1230, Standard Single Mode GPS Tracker, GPS Tracker, Tracker</p>
--	--

References

- C/A [CalAmp - A Connected Intelligence Company](#)
-  P65Warnings.ca.gov