Mukiya T618-F

Mukiya 3-in-1 Magnetic Wireless Charging Station

Model: T618-F

User Manual

1. Introduction

Thank you for choosing the Mukiya 3-in-1 Magnetic Wireless Charging Station. This versatile device is designed to simultaneously charge your iPhone, Apple Watch, and AirPods, providing a convenient and clutter-free charging experience. Its foldable design makes it ideal for travel, and the integrated night light adds functionality to any space. Please read this manual carefully before use to ensure optimal performance and safety.



Image: The Mukiya 3-in-1 Magnetic Wireless Charging Station, shown in both its upright charging configuration with devices and its folded, compact state, alongside its power adapter.

2. What's Included

Please verify that all items are present in your package:

- 1 x Mukiya 3-in-1 Magnetic Wireless Charger
- 1 x 18W QC 3.0 Adapter
- 1 x USB-A to Type-C Cable (1m/3.3ft)
- 1 x User Manual



Image: A visual representation of the package contents, including the foldable charging station, the 18W QC 3.0 power adapter, and the USB-A to Type-C charging cable.

3. Product Features

- **Foldable & Travel Portable:** The charging station can be smoothly folded into a compact wireless charging pad, making it easy to store and carry in your bag or luggage. This design is ideal for travel, business trips, or simply saving space on your desk.

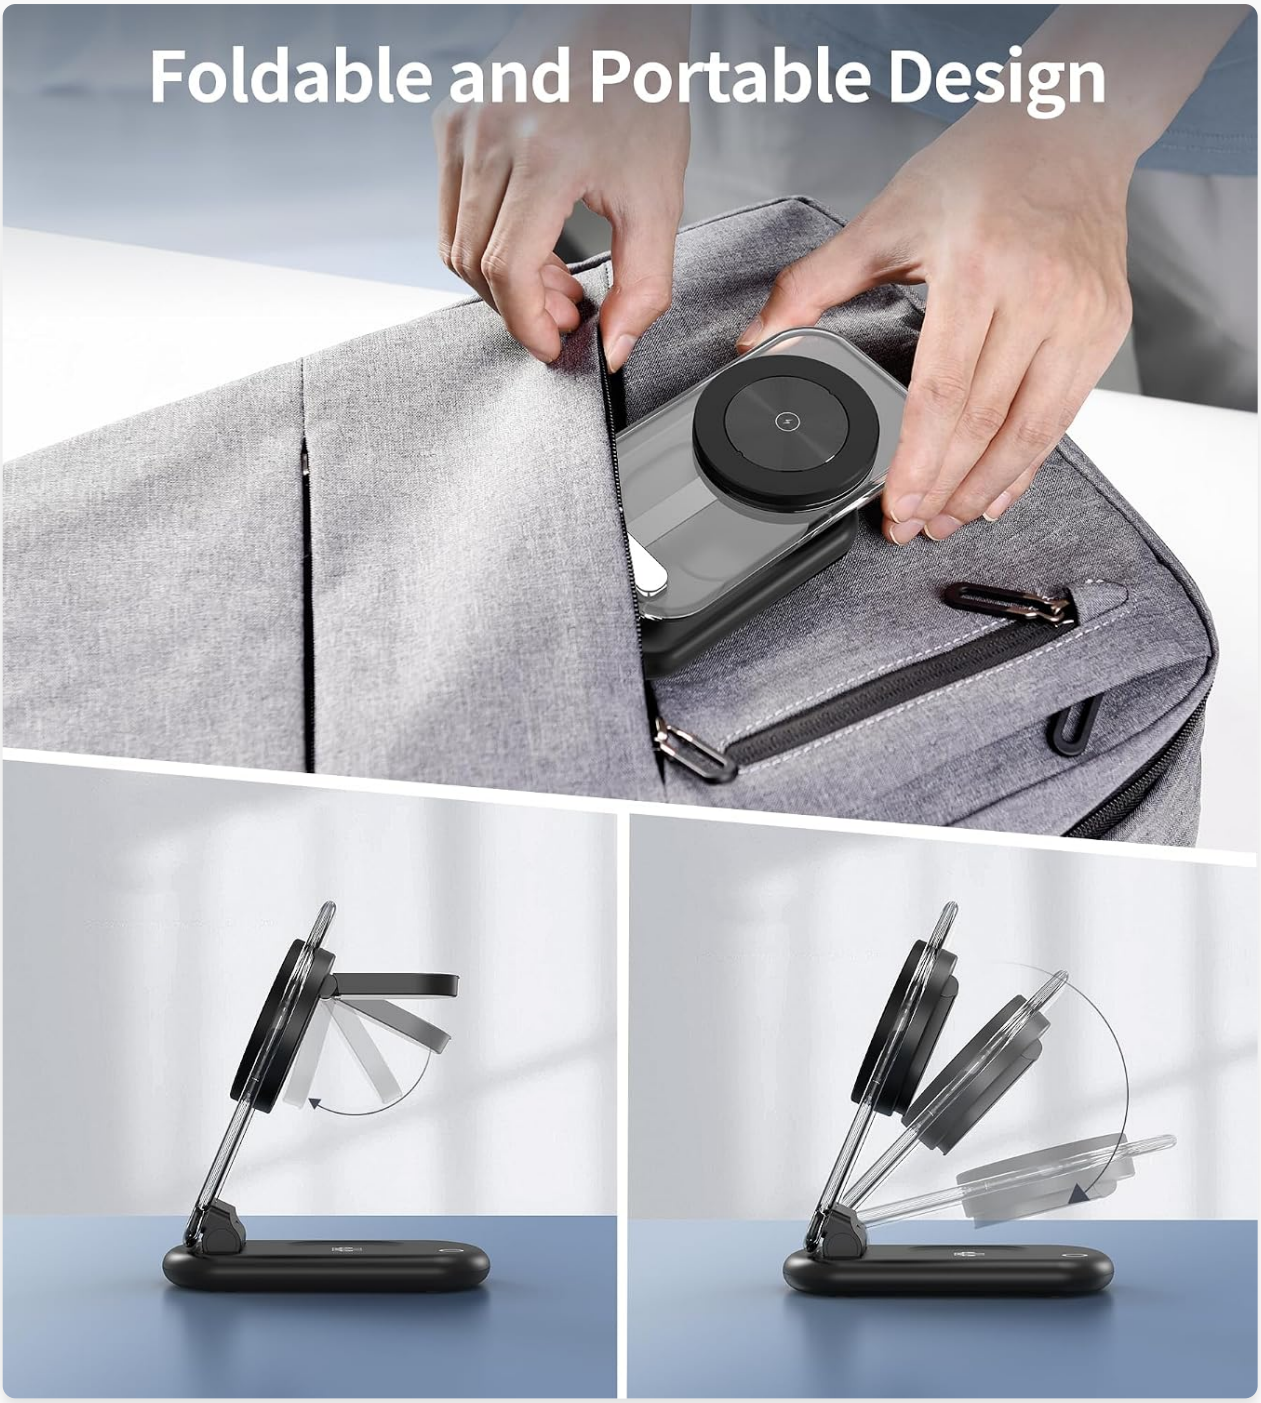


Image: The charging station shown in its folded state, being easily slipped into a backpack, highlighting its compact and portable design for travel.

- **Adjustable Touch Control Nightlight:** This multi-functional charging station includes an adjustable ambient night light. The warm light can be activated when the device is powered on or in standby mode. A blue light indicates phone charging. You can control the light by touching the designated switch, making it suitable for bedside use without disturbing sleep.



Image: The charging station displaying its controllable LED night light, with illustrations of the touch control area and different light colors indicating standby (warm white), charging earbuds/watch (warm white), and phone charging (blue light).

- **Power in 1s Snap:** Built-in dedicated magnets ensure precise Mag-Safe alignment for your Apple devices. This solid magnetic connection provides secure charging and holds your devices in any orientation (portrait or landscape).



Image: A close-up of a hand attaching an iPhone to the magnetic charging pad, illustrating the quick and secure magnetic connection for charging.

- **Fast and Safe Quick Charge:** The charger supports three different charging modes: Portrait Mode, Landscape Mode, and Flat Mode. It comes with an 18W QC 3.0 adapter and a USB-A to Type-C cable. The intelligent ETL Certified Chip protects your devices from overcharging, over-current, over-voltage, overheating, and short circuits, ensuring fast and safe charging.



Image: An exploded view diagram highlighting the internal components and safety features of the charging station, such as temperature, overcharge, overcurrent, and overvoltage protection.

- **Fully Adjustable Stand:** The stand offers 360° rotation and an adjustable angle from 0-78°, allowing for comfortable viewing angles for various activities like video calls or media consumption.



Image: The charging station demonstrating its fully adjustable stand, allowing users to set their device at various angles for optimal viewing, including 360° rotation and 0-78° tilt.

4. Compatibility

The Mukiya 3-in-1 Magnetic Wireless Charging Station is compatible with the following devices:

- **iPhones:** iPhone 16, 16 Plus, 16 Pro, 16 Pro Max, iPhone 15, 15 Plus, 15 Pro, 15 Pro Max, iPhone 14, 14 Plus, 14 Pro, 14 Pro Max, iPhone 13 mini, 13, 13 Pro, 13 Pro Max, iPhone 12 mini, 12, 12 Pro, 12 Pro Max.
- **Apple Watch:** iWatch 10/9/8/7/6/5/4/3/2/SE/Ultra/Ultra 2. (Note: Only for Apple Watch, not compatible with Samsung or other smartwatches).
- **AirPods:** AirPods Pro 2, AirPods Pro, AirPods 3, AirPods 2 with wireless charging case. (Note: For AirPods 2/3/4, only work with wireless charging case. Does NOT support non-wireless charging cases with models A3058, A2897, A1602).

Important: Please take off your phone case when charging, or use a magnetic phone case for optimal

performance.



Image: A detailed compatibility chart illustrating which iPhone, Apple Watch, and AirPods models are supported, along with a note about magnetic phone cases.

5. Setup Instructions

1. Unpack all components from the box.
2. Connect the USB-A end of the provided cable to the 18W QC 3.0 adapter.
3. Connect the Type-C end of the cable to the charging port on the Mukiya 3-in-1 Magnetic Wireless Charging Station.
4. Plug the 18W QC 3.0 adapter into a wall outlet.

5. The charging station is now ready for use.

6. Operating Instructions

6.1 Charging Your Devices

- **For iPhone:** Place your iPhone (with or without a magnetic case) onto the magnetic charging pad. The phone will snap into place, and a blue light on the base will illuminate to indicate charging.
- **For Apple Watch:** Place your Apple Watch onto the dedicated watch charging module. Ensure it is properly aligned for charging.
- **For AirPods:** Place your AirPods (with wireless charging case) onto the flat charging pad at the base.

6.2 Night Light Control

- The night light can be controlled by touching the designated switch area on the base of the charging station.
- When powered on or in standby mode, the light emits a warm glow.
- When an iPhone is charging, the light will turn blue.

6.3 Charging Modes

The magnetic charging pad for iPhone supports three orientations:

- **Portrait Mode:** Ideal for vertical viewing.
- **Landscape Mode:** Suitable for horizontal viewing, such as watching videos.
- **Flat Mode:** The stand can be folded flat for charging your iPhone like a traditional charging pad.

7. Maintenance

- To clean the charging station, disconnect it from the power source and wipe it with a soft, dry cloth.
- Do not use abrasive cleaners or immerse the device in water.
- Keep the charging station away from extreme temperatures, direct sunlight, and humid environments.
- Ensure the charging surfaces are free of dust and debris for optimal charging efficiency.

8. Troubleshooting

Problem	Possible Cause	Solution
Device not charging	Incorrect power adapter; Loose connection; Device misalignment; Non-magnetic phone case; Incompatible device.	Ensure you are using the provided 18W QC 3.0 adapter. Check all cable connections. Realign your device on the charging pad. Remove non-magnetic phone cases or use a Mag-Safe compatible case. Verify device compatibility with Section 4.
Slow charging	Using a non-QC 3.0 adapter; Background apps on device; Device overheating.	Use the provided 18W QC 3.0 adapter. Close unnecessary background applications on your device. Ensure proper ventilation around the charger and device.

Problem	Possible Cause	Solution
Night light not working	Not powered on; Faulty touch control.	Ensure the charging station is properly connected to power. Gently touch the control area multiple times. If the issue persists, contact customer support.
Magnetic connection is weak	Thick phone case; Non-Mag-Safe phone case.	Remove your phone case or use a Mag-Safe compatible case.

9. Specifications

Feature	Specification
Model Number	T618-F
Package Dimensions	7.76 x 4.06 x 1.85 inches
Item Weight	8.4 ounces
Connectivity Technologies	USB Type C
Special Features	Fast Charging, Magnetic, Wireless Charging, Night Light
Color	Upgraded Black
Input Voltage	12 Volts
Amperage	2 Amps
Total USB Ports	1 (for power input)
Wattage	15 watts (Max output)
Manufacturer	JiangXi Kingtron Technology Co., Ltd.

10. Warranty and Support

For warranty information and customer support, please refer to the documentation included with your purchase or contact the manufacturer directly. You can also visit the official Mukiya store on Amazon for more information: Mukiya Amazon Store.

© 2024 Mukiya. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question