



CAMPLUX FP19CR Propane Fire Pit Column Instruction Manual

[Home](#) » [CAMPLUX](#) » CAMPLUX FP19CR Propane Fire Pit Column Instruction Manual 

Contents

- [1 CAMPLUX FP19CR Propane Fire Pit Column](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Safety Information](#)
- [5 DIMENSION](#)
- [6 Contents](#)
- [7 Assembly Instructions](#)
- [8 Operation](#)
- [9 Maintenance](#)
- [10 Troubleshooting](#)
- [11 Warranty](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)
- [13 Related Posts](#)



CAMPLUX FP19CR Propane Fire Pit Column



Product Information

- **Product Name:** Propane Fire Pit Column
- **Model:** FP19CR
- **Manufacturer:** Camplux
- **Address:** 3330-A Marathon Ct Charleston, SC 29418
- **Contact:** 1(844) 538-7475
- **Email:** support@camplux.com
- **Website:** www.camplux.com

Product Usage Instructions

DANGER – FIRE OR EXPLOSION HAZARD:

1. If you smell gas, shut off gas to the appliance and extinguish any open flame.
2. If odor continues, leave the area immediately.
3. After leaving the area, call your gas supplier or fire department.
4. Failure to follow these instructions could result in fire or explosion, which could cause property damage, personal injury, or death.

WARNING:

- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- An LP cylinder not connected for use shall not be stored in the vicinity of this or any other appliance.
- If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury, or loss of life.
- For Outdoor Use Only. Installation and service must be performed by a qualified installer, service agency, or the gas supplier.
- Improper installation, adjustment, alteration, service or maintenance can cause property damage, personal injury, or loss of life. Refer to the owner's information manual provided with this appliance.

DANGER – CARBON MONOXIDE HAZARD:

This appliance can produce carbon monoxide which has no odor. Using it in an enclosed space can kill you. Never use this appliance in an enclosed space such as a camper, tent or home.

Safety Information:

Before you assemble or operate this unit, please carefully read this entire manual. Failure to do so may result in a fire, explosion, injury, or death.

Usage Instructions:

- The installation of this unit must adhere to local codes or the Propane Storage and Handling Code, CSA B149.2.
- This unit is intended for outdoor use only and must be used in a ventilated space.
- Only use propane gas (sold separately) and do not attach a remote gas supply to this unit.
- Do not burn solid fuels in this appliance.
- When igniting this unit, stay away from the burner as the flame will light up and may cause injury.
- Do not use more than 1/4 inch depth of lava rocks/pumice stone/Lava glass above the burner holes as it may suffocate the flame.
- If the propane gas tank is leaking gas, follow the instructions provided by the manufacturer.
- If applicable, allow the heating item to cool completely before placing on the lid. Do not use the heating item while the lid is installed.
- Only use the regulator and hose assembly provided with this unit. Replacement parts must be supplied directly by Camplux.

FIRE OR EXPLOSION HAZARD

If you smell gas:

- Shut off gas to the appliance.
- Extinguish any open flame.
- If odor continues, leave the area immediately.
- After leaving the area, call your gas supplier or fire department.

Failure to follow these instructions could result in fire or explosion, which could cause property damage, personal injury, or death.

WARNING

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance. An LP-cylinder not connected for use shall not be stored in the vicinity of this or any other appliance.

WARNING

If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury, or loss of life.

For Outdoor Use Only.

Installation and service must be performed by a qualified installer, service agency, or the gas supplier

WARNING

Improper installation, adjustment, alteration, service or maintenance can cause property damage, personal injury or loss of life. Refer to the owner's information manual provided with this appliance. Installation and service must be performed by a qualified installer, service agency, or the gas supplier.

INSTALLER: Leave this manual with the appliance.

CONSUMER: Retain this manual for future reference

CARBON MONOXIDE HAZARD

This appliance can produce carbon monoxide which has no odor. Using it in an enclosed space can kill you. Never use this appliance in an enclosed space such as a camper, tent or home.

Safety Information

Before you assemble or operate this unit, please carefully read this entire manual. Failure to do so may result in a fire, explosion, injury or death.

WARNING

- installation of this unit must adhere to local codes or Propane Storage and Handling Code, CSA B149.2.
- THIS UNIT IS INTENDED FOR OUTDOOR USE ONLY! This product shall be used outdoors, in a ventilated space and shall not be used in any enclosed area.
- This unit is to be used with propane gas only! (sold separately)
- Do not attach a remote gas supply to this unit.
- Only use propane gas for this unit.
- Solid fuels shall not be burned in this appliance.
- When igniting this unit, stay away from the burner as the flame will light up and may cause injury.
- LP GAS WARNING: Do not use any more than 1/4 in depth lava rocks/pumice stone/Lava glass above the burner holes. Doing so will suffocate the flame.
- If the propane gas tank is leaking gas, you may hear, see, or smell a hiss. Do the following:
 - Disconnect the propane gas tank.
 - Do not attempt to fix the problem yourself.
 - Contact your gas department for help.
- Applying too much propane may result in gas pooling and will not burn. Allow fresh air into the unit so that the remaining gas may escape.
- Do not use a flame to check for gas leaks.
- Manifold pressure: 11 inch w.c. (2.74kPa)
- Use LP propane tanks with the following dimensions: diameter 12 in, height 18 in – capacity 20 lbs.
- You must use a propane tank that has a collar to protect the gas valve.
- The tank system must be set up for vapor withdrawal.
- Discontinue use if any part of the propane tank is damaged. Rust and dents may be hazardous and should be

inspected by a gas supplier.

- DO NOT fill tank over 80 percent full.
- Do not burn anything other than the provided materials for this fire table.
- Keep away from the unit for the first 20 minutes after igniting your unit for the first time, as lava rocks/pumice stones/lava glass could pop out and cause injury. Should any rocks pop out, discard them.
- Always ensure that lava rocks/pumice stones/ lava glass are completely dry before use. Failure to do so will cause them to crack or pop.
- Do not operate unit until all parts are fully assembled.
- Do not paint or color any part of this heating unit.
- Unit may be hot while in use, do not attempt to move it while in use.
- Never leave this heating unit unattended while in use.
- This unit is not intended for cooking.
- Keep any flammable items away and do not use any other fireplace cover for this unit.
- Keep a safe distance to avoid burning skin or clothing.
- Do not sit or rest hands or feet on this heating unit.
- Never place hands or fingers on upper portion of this unit while in use.
- Keep all electrical cords and fuel supply hose away from heated surfaces.
- Cover must be removed when burner is in operation.
- Combustible material should not be within 60 inches of the top of the unit, or within 48 inches around the entire unit.
- Keep the appliance area clear and free from combustible material, gasoline and other flammable vapors and liquids.
- If the flame goes out while burning, turn the gas valve off. Wait 5 minutes before repeating the initial lighting procedure. Once you have a flame started, hold down the control knob for 1 minute.
- Do not add water into the unit.
- Do not operate unit if any part has been underwater. Immediately call a qualified service technician to inspect the appliance and replace any part of the control system and any gas control that has been underwater.
- Do not disconnect any part while unit is in use.
- Do not store a spare propane tank on or near this unit.
- If the heating unit is indoors, detach the propane tank and leave outdoors.
- Do not operate on a boat or vehicle. This unit must be used on a flat surface and outdoors ONLY.
- Always remove protective cover before operating (if applicable).
- Do not set the protective cover over the unit until it is turned off and completely cooled down.
- Check for leaks after not using the unit for long periods of time.
- Children should never operate this unit. Children must be supervised while near this unit.
- Keep gas tank at least 5 feet away from unit when lit. (If external tank)
- Maximum gas supply: 250 psi; Min. gas supply: 10 psi.
- All installation and repair should be done by a qualified professional. This unit should be inspected annually and cleaned regularly.
- Inspect all elements of this heating unit before each use. If there is damage, the burner must be replaced.
- Keep the hose out from any pathways to eliminate any accidental damage. (If external tank)
- Be aware of the hazards of high temperatures and stay away from the unit to avoid any burns or injury.
- The gas supply tank should be constructed and marked with the specifications for the LP gas tanks of the U.S.

Department of Transportation or the National Standard of Canada CAN/CSA-B339, LP gas tanks, spheres and tubes for Transportation of Dangerous Goods; and Commission.


- The LP gas tank must have a listed overfilling prevention device and a QCCI or Type I, (CGA791) LP gas tank connection.
- This heating appliance should not be used on plastic or artificial wood decks.
- Children and adults should be alerted to the hazards of high surface temperatures and should stay away to avoid burns or clothing ignition.
- Young children should be carefully supervised when they are in the area of the appliance.
- Clothing or other flammable materials should not be hung from the appliance or placed on or near the appliance.
- Any guard or other protective device removed for servicing the appliance shall be replaced prior to operating the appliance.
- Installation and repair should be done by a qualified service person. The appliance should be inspected before use and at least annually by a qualified service person. More frequent cleaning may be required as necessary. It is imperative that the control compartment, burners and circulating airways of the appliance are kept clean

If applicable:

- Allow heating item to cool completely before placing on lid.
- DO NOT use heating item while lid is installed. Always remove the lid while heating item is in use. Only use the regulator and hose assembly provided with this unit. Replacement parts must be supplied directly by Camplux. Inspect the burner before use of this unit. If the burner shows any kind of damage, do not operate the appliance. For assistance with repair or replacement of the burner or any other parts, calls 1(844)538-7475.

NOTE: You must follow all steps to properly assemble this heating item. Make sure the gas valve is turned "OFF" before assembling. Do NOT attempt to assemble without proper tools.

DIMENSION

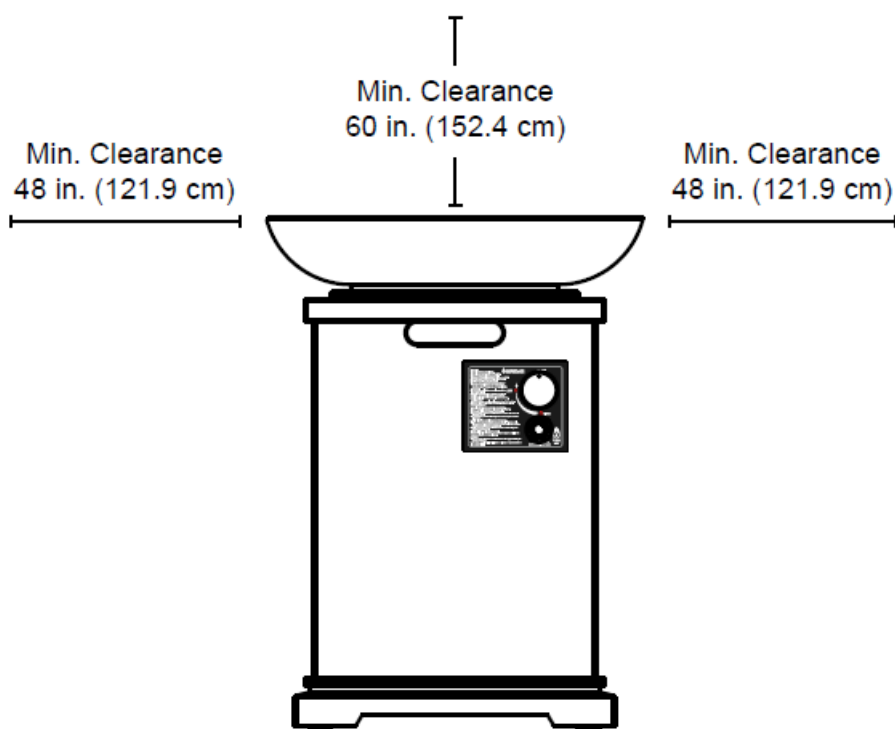


Combustible materials should not be within 60 inches of the top of the unit, or within 48 inches around the entire unit.

DANGER

Always place this outdoor fire pit on a hard, level, non-combustible surface such as concrete, rock or stone.


Contents

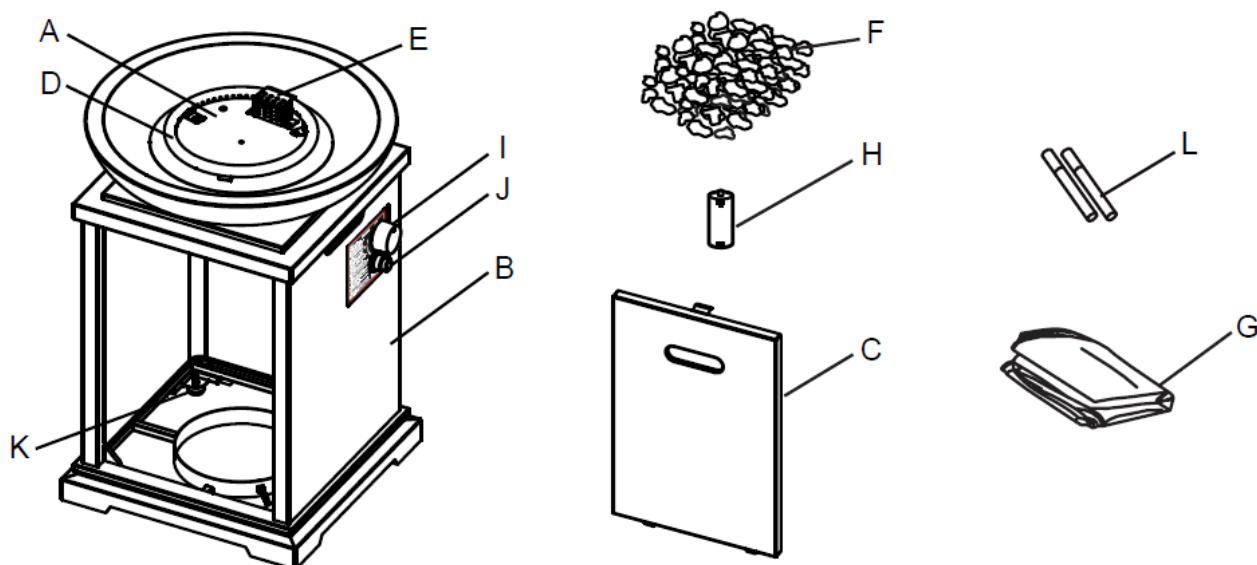


| Item | Description | Qty |
|------|-----------------------------------|-------------|
| A | Firebowl | 1 |
| B | Body | 1 |
| C | Door | 1 |
| D | Burner (preassembled) | 1 |
| E | Guard (preassembled) | 1 |
| F | Lava Rocks | 1box 6.61lb |
| G | Protective Cover | 1 |
| H | AAA Battery (Not-included) | 1 |
| I | Control Knob (preassembled) | 1 |
| J | Electronic Igniter (preassembled) | 1 |
| K | Feet (preassembled) | 4 |
| L | Touch-up pen | 2 |

Assembly Instructions

1. Check that the control knob (I) for the gas supply system is turned to the "OFF" position before starting any assembly

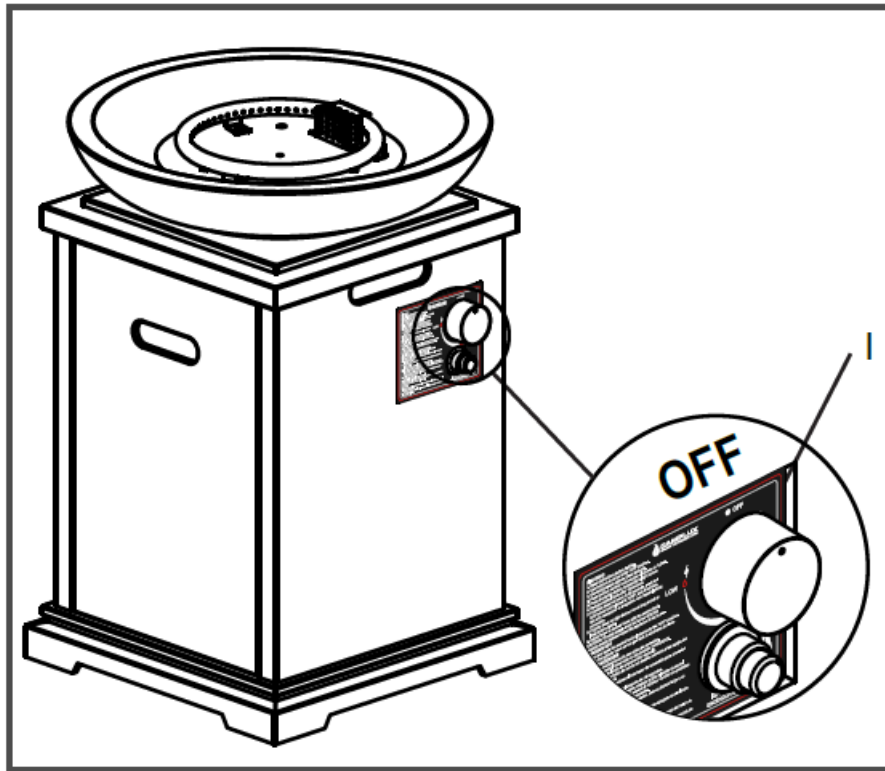


2. Remove door from body (B) and place propane gas tank (not included) into the metal stand inside of the body (B).

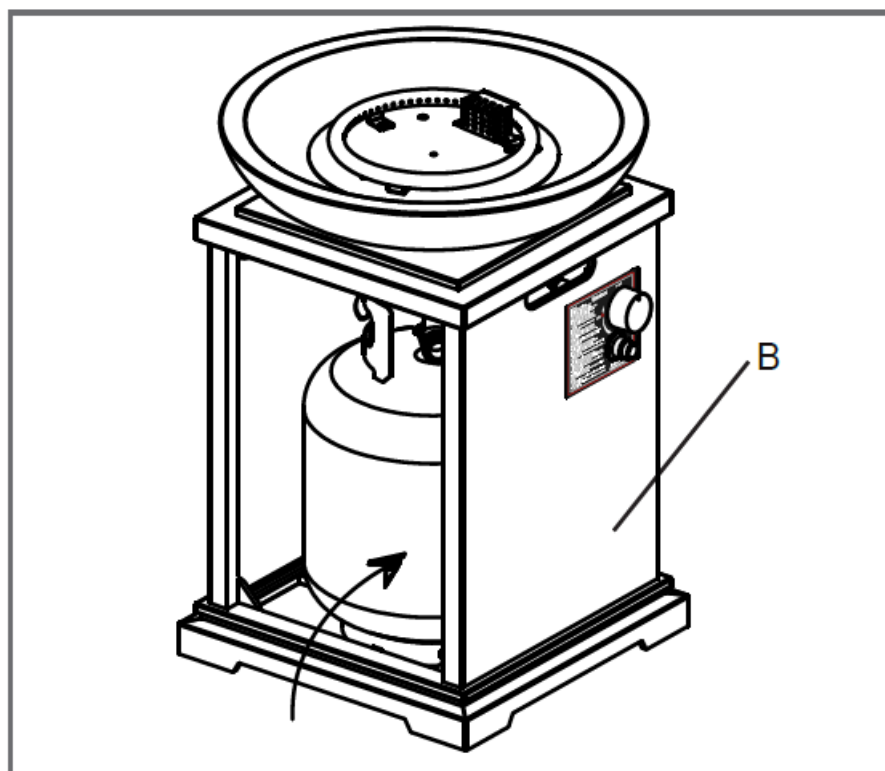


3. Turn the cylinder valve on the tank clockwise to close the propane tank. Attach the preassembled regulator from the body to the cylinder valve by turning the regulator coupling nut clockwise. Make sure it is fastened securely and tighten connections by hand only.

WARNING


Please inspect the rubber O ring in the propane tank valve to ensure it is not worn before attaching regulator. Worn rubber O ring can cause leaks, explosions and serious injury by propane tank

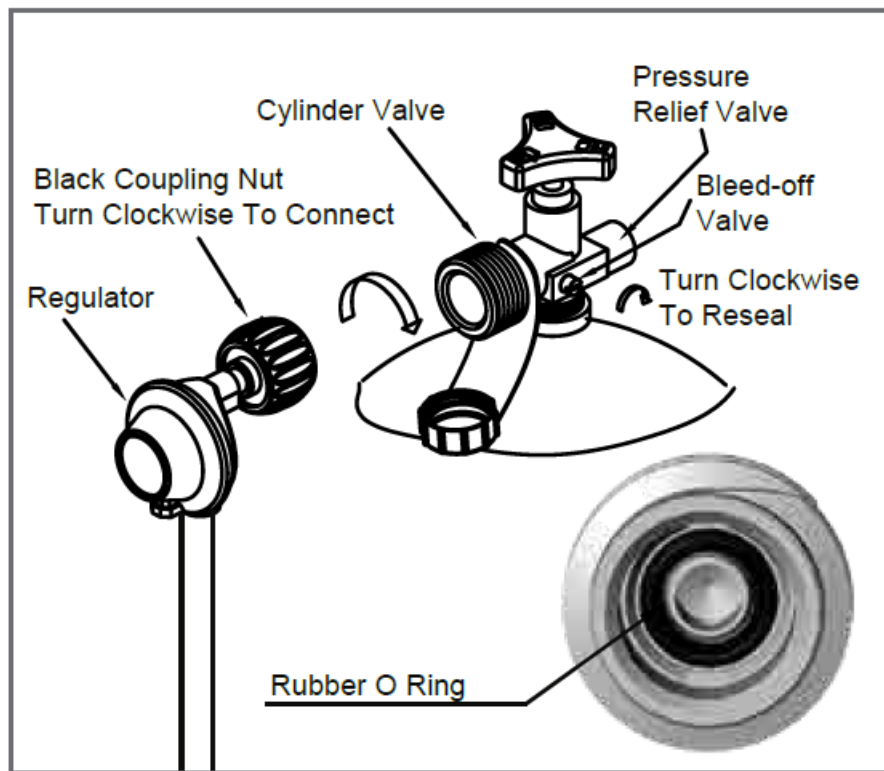


4. Once the tank is attached to the regulator, make sure the propane gas tank sits on the metal stand inside body (B) completely. Turn the preassembled wing screw on the outer part of metal stand clockwise to secure the propane gas tank tightly.

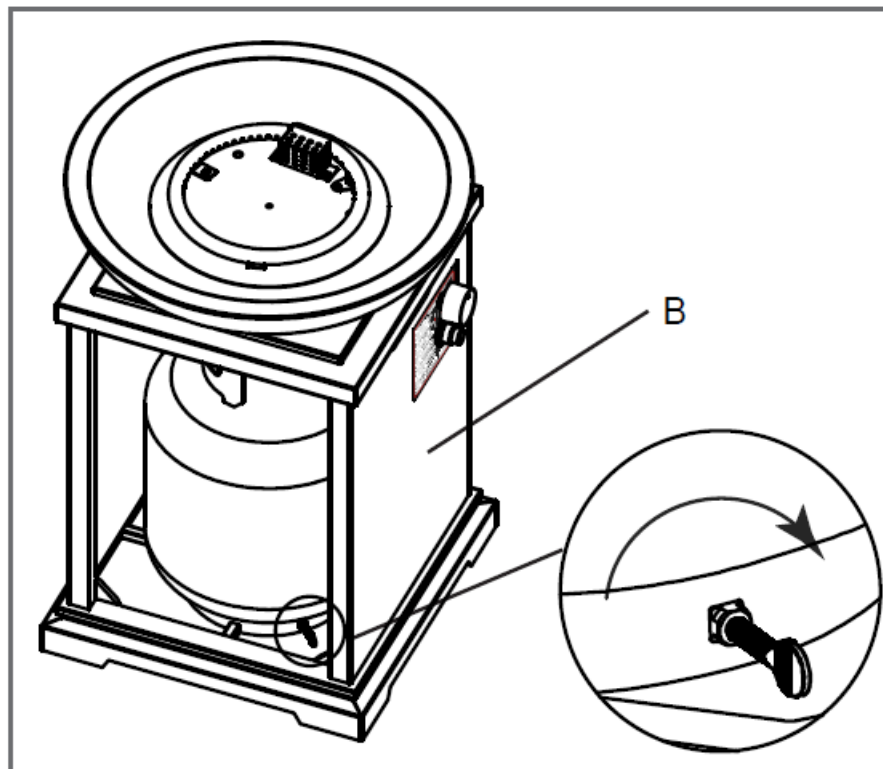

5. Replace door (C) onto the body (B).

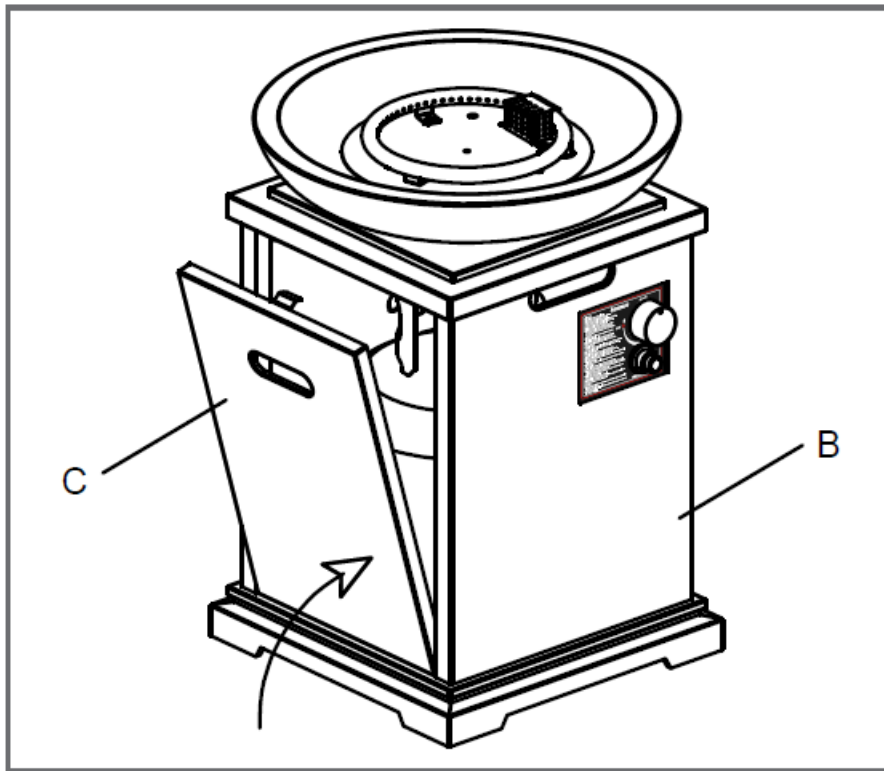

6. Remove the rubber cap on the electronic igniter (J) by unscrewing and slide battery (H) into the battery slot. Make sure the positive side of the battery faces outwards. Screw the electronic igniter cap (J) over the battery tightly.

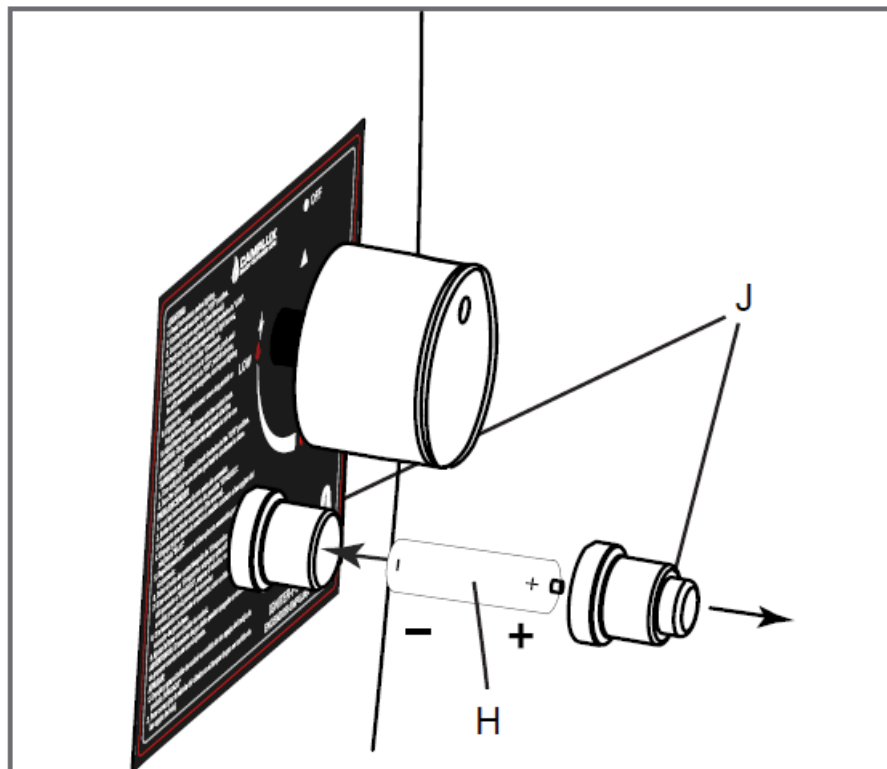


7. Pour the box of lava rocks (F) into the firebowl (A).

CAUTION


- To ensure proper function, the guard (E) on this burner (D) should be free of lava rocks at all times.
- Keep away from the unit and have the unit to burn 20 minutes for the first time use.

- Always ensure that lava rocks/pumice stones/lava glass are completely dry before use. Failure to do so will cause them to crack or pop

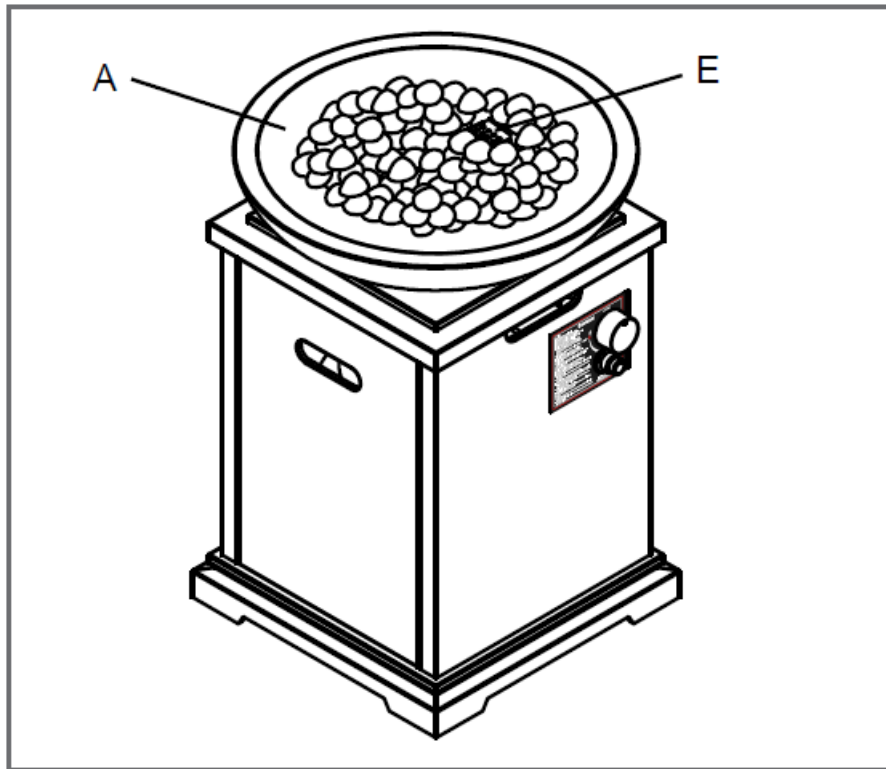

Operation

- Before performing a leak test, be sure that no sparks can occur and you are in a spacious outdoor area. Connect the propane gas tank to the regulator and turn the valve on the unit to the 'OFF' position. Brush a soap and water mixture on all connections. Turn the gas supply on; if bubbles occur on any connection there may be a leak. If you smell gas or a leak is discovered turn the gas valve off, disconnect propane gas tank and do not use the appliance until the leak is repaired.
- Do not use the heating unit without inspecting the gas hose. If there are signs of wear or abrasion you must replace the hose (if applicable). Pumice stones/lava rocks/lava glass could pop up and strike somebody's face during the process of lighting this unit; stand away from the unit for the first 20 minutes after igniting.
- Flame height should be a yellow/blue color between 2-10 inches in height.
- Wait 50 minutes after extinguishing fame before placing a lid (if applicable) or protective cover on heating item

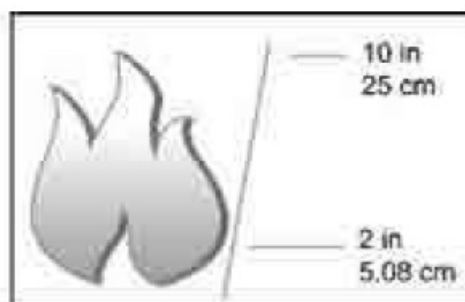

To light


1. Make sure the control knob (I) is in the "OFF" position.
2. Remove door (C) and slowly open the valve on the propane gas tank by turning the knob counterclockwise.
3. Replace the door (C) on the body (B).
4. Push and hold in the electronic igniter (J) to create sparks within the electrode, and continue to hold.
5. Push in the control knob (I) and turn to the "LOW" position. Keep holding down the control knob (I) to allow gas to flow for 15 seconds.
6. If ignition doesn't occur within a few seconds, release the control knob (I) and rotate to the "OFF" position. Wait for 5 minutes for gas to clear and then repeat the above lighting instructions.
7. Once the fire product is lit, the flame intensity may be controlled by turning the control knob (I) between the "LOW" and "HIGHT" positions.


To extinguish

1. Turn control knob (I) clockwise to the "LOW" position; let the knob pop up and continue turning the control knob (I) to the "OFF" position.
2. Close the cylinder valve on the propane gas tank if you don't intend to use it for a long time.

WARNING

If the burner does not ignite with the burner control valve open, gas will continue to flow out of the burner and could accidentally ignite causing injury or property damage.

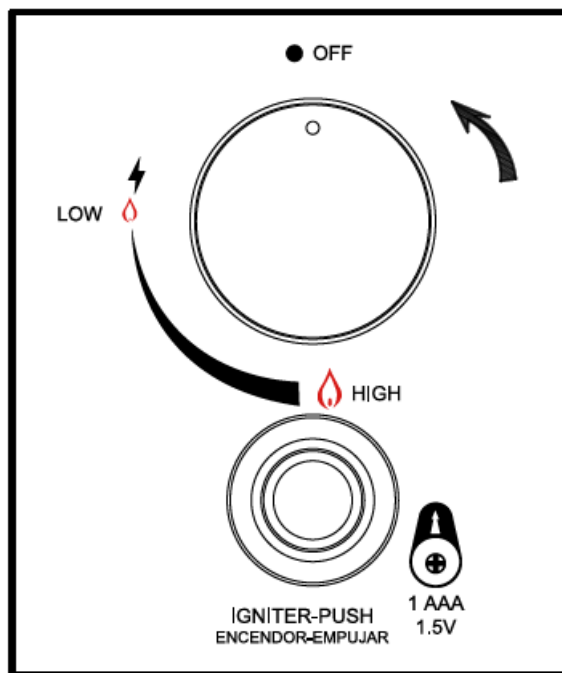

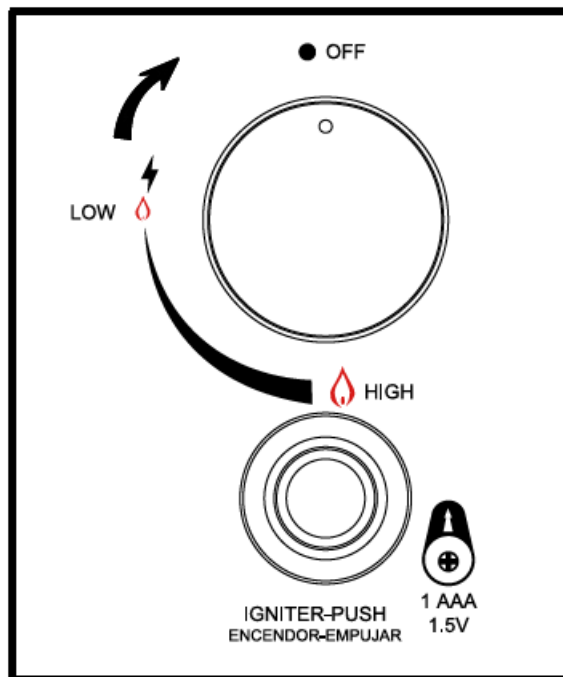

Maintenance

- Before performing any maintenance always disconnect the propane gas tank.
- Store your product indoors during winter months. Avoiding extreme cold temperatures will prevent from exposure damage.
- Keep the heating item free and clear from combustible materials.
- Visually inspect the burner for obstructions and keep tank enclosure free and clear from debris.
- Use a soft brush to get rid of the mild stains, loose dirt and soil after the burner and pumice stones/lava rocks/lava glass are completely cooled down. Wipe down with a soft cloth.
- Harsh weather conditions may cause stubborn stains, discoloration and possibly rust pitting.
- Permanent damage may occur if powder or solvent comes in contact with painted or plastic components on this heating unit.
- Keep the heating unit stored away from direct sunlight.
- If storing this unit inside, disconnect the propane gas tank from the gas valve.
- Not using manufacturer-approved or supplied parts/accessories may result in a defective condition and void the warranty of this heating unit.
- Always place lid (if applicable) or protective cover on heating item when not in use.

Surface care

Our material has been sealed with a patented treatment to prevent staining and moisture absorption, but it does require proper maintenance to ensure the integrity of the surface. Please see below for recommendations on maintaining your surface for years of pleasure:

- Clean any spills immediately to prevent permanent surface staining or damage. Blot any liquid spills with a clean, dry cloth to avoid spreading of the spill to the rest of the table. Clean your surface with a soft, clean cloth or sponge. Mix a solution of warm clean water and mild dish soap to remove any surface dirt or mild spills.

Rinse all soap solution off of the tabletop and dry completely to avoid water spots. Regularly cleaning the surface will aid in a longer lasting product.

- Do not use petroleum-based or abrasive cleaning products. Do not use any harsh brushes when cleaning the surface.
- Do not slide products across the surface to avoid permanent scratching and damage.
- Always use protective mats such as coasters or placemats when eating on an surface. These protective products will help absorb sweating on cool beverages and will block out any heat rings from appearing beneath a warm mug or plate. When placing hot dishes on an surface, always use mats or hot pads.
- Surface must be covered at all times when not in use. Cover your product with an outdoor furniture cover when not in use to protect it from the elements. Store your product indoors during winter months. Avoiding extreme cold temperatures will prevent cracking of the tabletop.

Troubleshooting

| Problem | Cause | Solution |
|---|--|---|
| Heating unit won't light | Igniter pin and burner are wet | Dry off with a soft cloth |
| | Igniter battery is incorrectly inserted | Check which direction the battery is inserted |
| | Igniter pin is broken | Contact for a replacement part |
| | Electrode wire is loose or disconnected | Reconnect wire to the igniter box located inside the table behind the igniter box |
| | Electrode wire is shorting between valve and igniter pin | Contact for a replacement part |
| Burner won't light while using a match | No gas flow | Check that the gas tank isn't empty |
| | Regulator isn't connected securely to the tank | Tighten regulator connection to the gas tank |
| | Gas flow is obstructed | Check all hoses for kinks and bends |
| | Burner ports are clogged | Turn all gas flow connections off. Insert an opened paperclip (or similar item) into each of the burner ports to clear them out |
| | Propane cylinder is frosted over | Wait until the propane cylinder warms up and becomes unfrosted |
| Heating unit emits a lot of black smoke | Flame is obstructed at burner ports | Check that all burner ports are free of any small lava rocks/pumice stones/pieces |
| | Regulator hose is kinked | Straighten hose of all bends or kinks |
| Sudden drop in gas flow | No gas flow | Check that the gas tank isn't empty |
| | Excess flow safety valve has been activated | Turn the control knob to the 'OFF' position. Close the tank valve and disconnect propane gas tank. Turn the control knob to 'high'; wait 1 minute. Turn the control knob back to the 'off' position. Reconnect propane gas tank. Light the fire unit as indicated in the 'To Light' section of this manual |
| Flame blows out easily | High or gusting winds | Increase flame to 'high' |
| | No gas flow | Check that the gas tank isn't empty |
| | Excess flow safety valve has been activated | See 'sudden drop in gas flow' above |

Warranty

This product has a one-year warranty against manufacturing defects in workmanship, or materials. The manufacturer warranty will be voided, and manufacturer disclaims any responsibility for the following actions:

- Modification of the unit and/or components including the gas valve assembly.
- Use of any component part not manufactured or approved by Camplux.

- Use and installation other than what is listed in this manual.

Please contact the manufacturer for replacement parts.


3330-A Marathon Ct Charleston, SC 29418 1(844) 538-7475 support@camplux.com

Visit Us: Camplux.com



www.camplux.com

Documents / Resources

| | |
|---|--|
|  | <p>CAMPLUX FP19CR Propane Fire Pit Column [pdf] Instruction Manual FP19CR Propane Fire Pit Column, FP19CR, Propane Fire Pit Column, Fire Pit Column, Pit Column</p> |
|---|--|

References

-  [Camplux](#) | [Best Tankless Water Heaters](#) | [Camplux](#)
-  [Camplux](#) | [Best Tankless Water Heaters](#) | [Camplux](#)