

CDN TM30 Direct Entry 2-Alarm Timer



CDN TM30 Direct Entry 2-Alarm Timer Instruction Manual

[Home](#) » [CDN](#) » CDN TM30 Direct Entry 2-Alarm Timer Instruction Manual 

Contents

- [1 CDN TM30 Direct Entry 2-Alarm Timer](#)
- [2 SPECIFICATIONS](#)
- [3 Features](#)
- [4 Battery Installation](#)
- [5 DIMENSIONS](#)
- [6 PRODUCT OVERVIEW](#)
- [7 Operating Instructions](#)
- [8 Care of Your Product](#)
- [9 Warranty](#)
- [10 FREQUENTLY ASKED QUESTIONS](#)
- [11 References](#)
- [12 Related Posts](#)



CDN TM30 Direct Entry 2-Alarm Timer




SPECIFICATIONS

- **Features** Counts up/down, big digit, direct entry, loud alarm, long alarm, audio/vibrate, stop and restart, last count recall, counts up after zero, sliding mode switch
- **Measurement Range** 10 hours by hr/min/sec
- **Unit of Measure** hour/minute/second
- **Alert/Alarm** audio/vibrate, ≥ 70 dB alarm for 1 minute, then counts up
- **Housing Material** Brushed stainless steel finish, ABS plastic
- **Display Material** LCD
- **Display Size** 1.875 W x 0.75 H (in)/4.8 W x 1.9 H (cm)
- **Resolution** 1 second
- **Mounting** Pocket clip, magnet, stand and loop
- **Operating Range** 32 to 104°F/0 to 40°C $\leq 90\%$ RH
- **Battery** AAA alkaline battery included
- **Battery Life** 6 months
- **Dimensions** 2.5 W x 3.0 H x 1.0 D (in)/6.4 W x 7.6 H x 2.5 D (cm)
- **Weight** 2.6 oz / 73.1 g (including battery)
- **UPC** 0 18436 00404 2
- **Certification** WEEE, CE
- **Warranty** 5-Year Limited Warranty

Features

- Counts up & down
- Big digit
- Direct entry
- Loud and long alarm
- Audio/vibrate alarm
- Stop and restart
- Last count recall
- Counts up after zero
- Brushed stainless steel finish
- ABS plastic
- Sliding mode switch
- 4-way mounting: pocket clip/magnet/stand/loop
- Battery and instructions included

Note: Remove sticker from display before use.

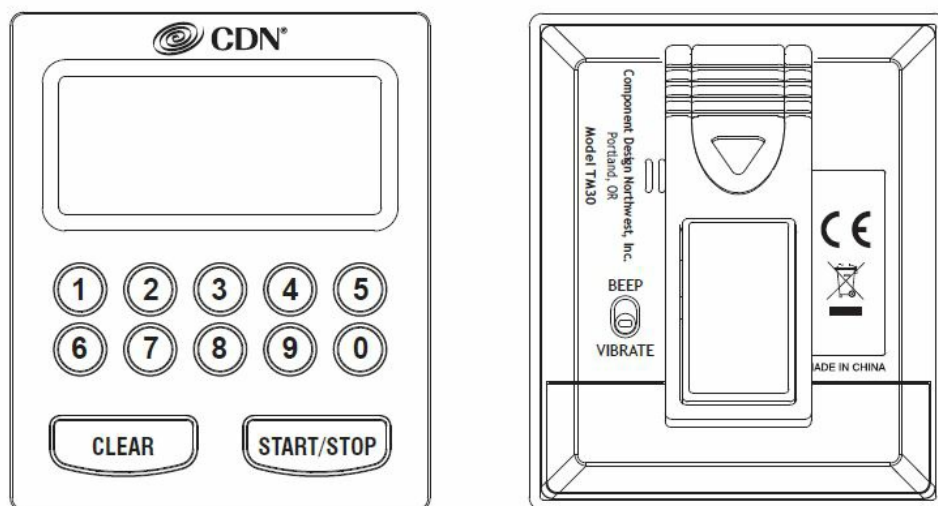

Note: In the following instructions, names of the control buttons are shown in CAPS. Function information that appears on the display is shown in BOLD CAPS.

Battery Installation

Replace battery when LCD becomes dim or alarm level declines.

1. Remove battery door in back by sliding in direction of arrow.
2. Install 1.5V AAA battery observing polarity shown in compartment.
3. The display will show all segments and a "beep" will sound.
4. Replace battery door.

DIMENSIONS



PRODUCT OVERVIEW



Operating Instructions

Set Alarm

1. Slide switch on the back to BEEP or VIBRATE to select alarm mode.

Count Down

1. Enter the time to be counted on the 1 – 0 keypad. For example, to count 3 minutes exactly, enter 3 0 0 for three minutes, zero seconds. To count 9 hours, 45 minutes and 30 seconds, enter 9 4 5 3 0.
2. Press START/STOP to start the count down. Press START/STOP button to interrupt the count. Press START/STOP button again to resume the count.
3. To clear the count before reaching zero, stop the count by pressing START/STOP. Then press the CLEAR button.

Note: The count must first be stopped to prevent accidental clearing of the display.

4. On reaching zero the alarm will sound for oneminute, the display will flash and will start to count up to indicate the overtime since reaching zero. The maximum overtime is 10 hours.
5. Press START/STOP to stop the alarm and the count up. The last count is recalled.
6. Press CLEAR to reset to 0:0000.

Count Up

1. When the timer is stopped, press CLEAR to reset to 0:0000.
2. Press START/STOP to begin the count up to a maximum of 10 hours.
3. Press START/STOP to interrupt the count. Press START/STOP again to resume the count.
4. To clear the display, press START/STOP to stop the count. Then, press CLEAR to reset the display to 0:0000.

Care of Your Product

- Avoid exposing your timer to extreme temperatures, water or severe shock.
- Avoid contact with any corrosive materials such as perfume, alcohol or cleaning agent.
- Wipe clean with a damp cloth.

CE Note: This device could be sensitive to electrostatic discharge. If electrostatic discharge or malfunctioning occurs, please re-install the battery to reset this unit.

The information in this document has been reviewed and is believed to be accurate. However, neither the manufacturer nor its affiliates assume any responsibility for inaccuracies, errors or omissions that may be contained herein. In no event will the manufacturer or its affiliates be liable for direct, indirect, special, incidental or consequential damages arisen by using this product or resulting from any defect/omission in this document, even if advised of the possibility of such damages. The manufacturer and its affiliates reserve the right to make improvements or changes to this document and the products and services described at any time, without notice or obligation.

Warranty

5-Year Limited Warranty: Any instrument that proves to be defective in material or workmanship within five years of original purchase will be repaired or replaced without charge upon receipt of the unit prepaid at: CDN, PO Box 10947, Portland, OR 97296-0947. This warranty does not cover damage in shipment or failure caused by tampering, obvious carelessness or abuse.

Component Design Northwest, Inc.

PO Box 10947 Portland, OR 97296-0947

- **Tel** 800 338-5594
- **Fax** 800 879-2364
- info@cdn-timeandtemp.com
- www.cdn-timeandtemp.com

FREQUENTLY ASKED QUESTIONS

What is the brand of the 2-alarm timer, and what is its model number?

The brand of the 2-alarm timer is CDN, and its model number is TM30.

What are the product dimensions and weight of the CDN TM30 Direct Entry 2-Alarm Timer?

The product dimensions of the CDN TM30 Direct Entry 2-Alarm Timer are 3 x 2.5 x 1.5 inches, and its weight is 2.24 ounces.

How is the CDN TM30 Direct Entry 2-Alarm Timer mounted, and what are the mounting options?

The CDN TM30 Direct Entry 2-Alarm Timer can be mounted in four ways: pocket clip, magnet, stand, and loop.

What type of batteries does the CDN TM30 Direct Entry 2-Alarm Timer require, and how many?

The CDN TM30 Direct Entry 2-Alarm Timer requires 2 AAA batteries, and they are included.

What is the warranty period for the CDN TM30 Direct Entry 2-Alarm Timer, and what does it cover?

The CDN TM30 Direct Entry 2-Alarm Timer comes with a 5-Year Limited Warranty. It covers defects in material or workmanship within five years of the original purchase. CDN will repair or replace the unit without charge under warranty terms.

Where should a defective CDN TM30 Direct Entry 2-Alarm Timer be sent for repair or replacement under warranty?

A defective CDN TM30 Direct Entry 2-Alarm Timer under warranty should be sent prepaid to CDN, PO Box 10947, Portland, OR 97296-0947.

What is excluded from the warranty coverage of the CDN TM30 Direct Entry 2-Alarm Timer?

The warranty for the CDN TM30 Direct Entry 2-Alarm Timer does not cover damage in shipment or failure caused by tampering, obvious carelessness, or abuse.

When was CDN founded, and who was the founder?

CDN was founded in 1984 by the late Richard Murtagh, an engineer by profession and a cook at heart.

What does CDN specialize in, and what types of tools does it offer?

CDN specializes in measurement tools and offers a wide assortment of thermometers, timers, and scales.

What type of timer is the CDN TM30 Direct Entry 2-Alarm Timer, and what features does it have?

The CDN TM30 Direct Entry 2-Alarm Timer is a direct entry digital timer with two alarms. It can count up or down up to 10 hours by hours, minutes, and seconds. It features loud audio and two alarms that vibrate. The practical last count recall stores the last time setting for repeated events.

What is the ideal use of the CDN TM30 Direct Entry 2-Alarm Timer, and what are some examples of its applications?

The CDN TM30 Direct Entry 2-Alarm Timer is ideal for a variety of uses, including marinating meats, baking cookies, cooking pasta, and more.

What type of battery is included with the CDN TM30 Direct Entry 2-Alarm Timer, and is it included in the package?

The CDN TM30 Direct Entry 2-Alarm Timer includes 1 AAA battery, and it is included in the package.

What is the practical feature called last count recall in the CDN TM30 Direct Entry 2-Alarm Timer?

The practical last count recall feature in the CDN TM30 Direct Entry 2-Alarm Timer stores the last time setting for repeated events.

Is the CDN TM30 Direct Entry 2-Alarm Timer suitable for use in various temperature conditions, and what does CDN offer for temperature measurement?

CDN offers a wide variety of temperature measurement tools suitable for different temperature conditions. However, specific information about the temperature conditions for the CDN TM30 Direct Entry 2-Alarm Timer is not provided.

What does CDN produce besides timers, and what is its category leadership based on?

Besides timers, CDN produces thermometers, timers, and scales. CDN is a global category leader known for product innovation, quality, and value.

DOWNLOAD THE PDF LINK: [CDN TM30 Direct Entry 2-Alarm Timer Instruction Manual](#)

REFERENCE: [CDN TM30 Direct Entry 2-Alarm Timer Instruction Manual-Device.Report](#)

References

- [User Manual](#)