

CE LINK MPP15-1LCNB-J Wireless Charger with QI2 Module User Manual

Home » CE-LINK » CE LINK MPP15-1LCNB-J Wireless Charger with QI2 Module User Manual 🖔

CE LINK MPP15-1LCNB-J Wireless Charger with QI2 Module



Contents

- 1 DEAR CUSTOMER
- **2 INTRODUCTION**
- **3 FEATURES**
- **4 SPECIFICATIONS**
- **5 PACKING LIST**
- **6 OPERATION**
- **7 CONNECTION**
- **DIAGRAM**
- **8 FCC Warning**
- 9 Documents / Resources
 - 9.1 References

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before using this product. Please keep this manual for reference in the future.

INTRODUCTION

This product is a wireless charging device in accordance with the QI protocol which is suitable for mobile phones, and other devices based on wireless charging 5W or 15W. Connect the wireless charger to a power supply and then you can charge your device which is supported wireless charging (mobile phones, etc.) by putting it on the wireless charger directly.

FEATURES

Port input: Type-C PD: 5V3A, 9V2.22A 20W

• Transmitting terminal output: 5W/15W

· It is light, smart and convenient to use

• Compatibility: iPhone 13 series, iPhone 14 series, iPhone 15 series and other mobile phones compatible with QI protocol

SPECIFICATIONS

| Input | Type-C PD: 5V3A, 9V2.22A 20W |
|-----------------------------|------------------------------|
| Output | 15W Max |
| Wireless Charging Frequency | 128kHz / 360kHz |
| Operation Temperature Range | 0 ~ 35°C |
| Operation Humidity | 10% ~ 90%RH |
| Magnetic Force | 7.6 ~ 12N |
| Over Voltage Protection | Yes |
| Under Voltage Protection | Yes |
| Size | 59.7±0.1 × 10.1±0.2mm |
| User Manual | English Version |

PACKING LIST

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- Main unit×1
- User Manual×1

OPERATION


Operation Procedures

- 1. Connect the wireless charger to the power adapter, and connect the power adapter to the power supply.
- 2. Place your device (which supports wireless charging) on the wireless charger.
- 3. Please take out the device after it is fully charged.

Operation Notes

- 1. For optimum performance, please use the wireless charger according to this user manual.
- 2. Please connect the wireless charger to the power adapter which the output should be 5V3A, 9V2.22A. It is also compatible with PD protocol.
- 3. Please unplug the wireless charger after using.
- 4. Do not use the wireless charger with an electronic product which is not in conformity with the specifications, so as to avoid any problems caused by specification mismatching.
- 5. It's normal that wireless charger will be a little overheated in the use process.
- 6. When the wireless charger stops working under some accidents, you need to check whether the device is compatible with this charger.
- 7. Do not let the wireless charger close to fire, such as stove, candles and etc.
- 8. Do not let the wireless charger soak into liquid, such as swimming pool, bathtub, etc.
- 9. Do not wash the wireless charger with corrosive cleaner.
- 10. If the wireless charger cannot work properly, please contact the store or distributor in your area.
- 11. Do not place metal objects on the back of the phone while it is charging wirelessly.

CONNECTION DIAGRAM

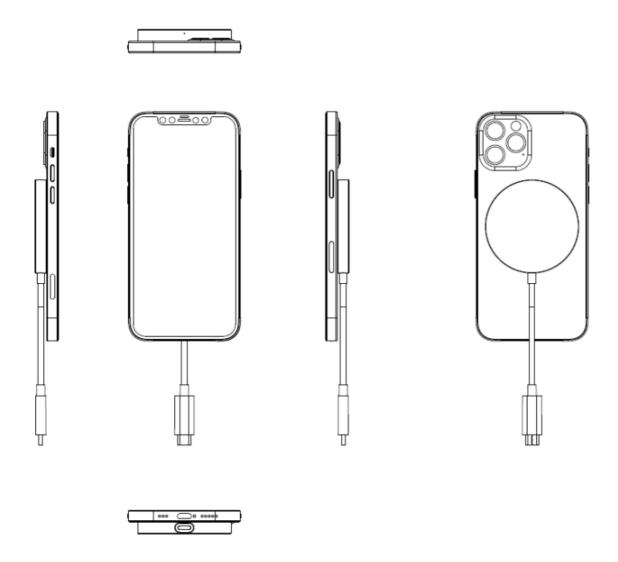

FCC Warning

This device complies with Part 18 of the FCC Rules.

NOTE: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Refer to FCC Part 18.213(c) and KDB 784748 Anner A section A.5:

(a) Max. Electric Field Emissions: 6.12V/m Max. Magnetic Field Emissions: 0.44A/m

- (b) The maintenance of the system is the responsibility of the manufacturer.
- (c) To prevent interference, the product should be as far away from devices operating at the same frequency as possible.

RF exposure considerations

This equipment complies with the FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.

Documents / Resources



CE LINK MPP15-1LCNB-J Wireless Charger with Ql2 Module [pdf] User Manual MPP15-1LCNB-J, A4X-MPP15-1LCNB-J, A4XMPP151LCNBJ, Ql2 Wireless Charger, Ql2, Charger, Ql2 Charger, Wireless Charger, MPP15-1LCNB-J Wireless Charger with Ql2 Module, MPP 15-1LCNB-J Wireless Charger, Wireless Charger with Ql2 Module, MPP15-1LCNB-J

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.