



# Cel-Fi GO X MIMO Signal Booster System Instruction Manual

[Home](#) » [CEL-FI](#) » Cel-Fi GO X MIMO Signal Booster System Instruction Manual 



## Please Read This First

We know, that reading manual isn't always fun. But we promise it's worth it.

We've helped thousands of customers install the Cel-Fi GO X and boost their signal. We've compiled everything we've learned in this manual.

Give it a read before you start: it'll save you time and help you get the best performance out of your GO X MIMO setup.

**Please note: Your two Cel-Fi GO Xs will come pre-programmed to boost the Verizon signal.**

You will need to change the carrier on both units using the Wave app if you are using a different provider.

### About Waveform

The GO X MIMO Kit is manufactured by Cel-Fi but developed and supported by Waveform and our team of Signal Specialists.

We've helped over 30,000 customers boost their signal since our company was founded in 2007. We've installed and configured thousands of devices in buildings across the country, and **we're here to help**. If you have any issues at all, please don't hesitate to reach out.



52 Maxwell, Irvine, CA 92618



+1 (800) 761-3041



[www.waveform.com](http://www.waveform.com)

## Contents

- 1 What's In The Box
- 2 Install manuals, who needs 'em?
- 3 Before you start
- 4 Install Process Overview
- 5 Quick Introduction to Cellular Signal
- 6 Wave App and Carrier Selection
- 7 Understand How The GO X Works
- 8 Positioning & Aiming the Outdoor Antenna
- 9 Set up a Temporary Install
- 10 Indoor Antennas: Types & Placement
- 11 Indoor Antennas: Separation
- 12 Assembling Your Kit
- 13 Test & Install Permanently
- 14 Optional: Test Band Combinations
- 15 The "Advanced" Tab
- 16 Some Final Tips
- 17 Upgrading Antennas
- 18 Tell Us How It Works
- 19 Documents / Resources
- 20 Related Posts

## What's In The Box



2x Cel-Fi GO X Amplifiers  
and AC Power Supplies



Outdoor MIMO Panel  
Antenna



Universal Antenna  
Mount



2x 30 ft Twin-RS240  
Cables

### Indoor Antennas (Depends on Kit Selection)

Depending on which version you purchased, your GO X kit will contain either a **MIMO Dome** or **MIMO Panel indoor antenna**.



Indoor MIMO  
Ultra-Flat Dome  
Antenna

Indoor  
MIMO Panel  
Antenna

## Other Parts

Antenna Mount Hardware	2x Lightning Surge Protectors	2x 5 ft RS200 Jumper Cables
Red bag	Clear bag	

## Install manuals, who needs ‘em?

**Signal boosters can be finicky to set up.** The Cel-Fi GO X is no exception. It will take a bit of work to get your GO X MIMO setup installed optimally.

But there’s a reason that most people are willing to take the time to perform an installation, even if it takes 4 to 5 hours. This is the only MIMO signal booster kit on the market, and the GO X is the only amplifier that provides an industry-leading 100 dB of gain. Once you get set up and running properly, you should see a **significant** improvement in signal, right away.

We’ve written this guide based on our own experiences and those of hundreds of customers who we’ve helped.

**We promise you’ll be glad if you read this manual thoroughly before you get started.**

### Who We Are

Hi! We’re Waveform. We’ve been around since 2007, and while we’ve grown a bunch since then we’re still a small team. There’s just a handful of us answering texts, and picking up calls.

The four of us pictured below lead support and product development. Feel free to reach out to us at any time; our emails are all just our first names [@waveform.com](mailto:@waveform.com)



Ian (Support)



Marcus (Product)



Sina (CEO)



Harry (Support)

## Stuck? Have Questions? Please: Contact Us!

We’re a small team, but we really care about helping you get the best results.

Talking to customers is what helps us improve our products. We can also help troubleshoot, and sometimes a

small tweak we suggest can make all the difference.

Even if everything goes smoothly, reach out and let us know how your system is performing.

We love getting feedback: let us know if there's any way we could have made the installation process or this manual better.

**Call us at (800) 761-3041 or email [help@waveform.com](mailto:help@waveform.com).** We're available from 9 am-5 pm PT, Monday to Friday.

## Before you start

When installing the GO X MIMO kit, it's critical that you have at least 1 bar of usable signal outside or on the roof of the building. If you don't have 1 bar, or if you're not sure, please give us a call for assistance.]

### What do we mean by usable?

Well, you need to be able to place a call and use data reliably. For example, when running a speed test, you should have decent upload and download speeds.

Cell boosters bring signals inside from outdoors. If the signal outside your building isn't usable, the GO X MIMO isn't going to help.

If you don't have 1 bar of usable signal, we're sorry, but unfortunately, the MIMO Cel-Fi GO X system is unlikely to work at your location. You can visit [waveform.com/returns](https://waveform.com/returns) to set up a return. We're happy to take your MIMO Cel-Fi GO X back and try to help you find a booster that might work.

### Compatibility

A quick note on compatibility. The Cel-Fi GO X is compatible with:



AT&T 3G and 4G LTE signal on Bands 2, 4, 5, and 12



T-Mobile 3G and 4G LTE signal on Bands 2, 4, 5, and 12



Verizon 4G LTE signal on Bands 2, 4, 5, and 13

Worried about 5G? The Cel-Fi GO X is the only consumer-grade signal booster capable of relaying 5G-DSS at 100 dB of gain.

Dynamic Spectrum Sharing (DSS) is used by some carriers to transmit 4G LTE and 5G in a single "hybrid" channel. 5G DSS Support on the GO X is enabled by default on the same bands listed above.

Please note that the GO X does not support boosting T-Mobile 5G at this time. T-Mobile's 5G bands are deployed on bands n71 and n41. FCC rules do not allow any consumer-grade signal booster sold in the US to amplify these bands.

## Install Process Overview

**This is the process that we suggest using for installing your MIMO Cel-Fi GO X:**

1. **Read this manual.** Ideally from start to finish so that you understand the whole process before you begin.
2. Download the Wave app to your phone by visiting [waveform.com/waveapp](https://waveform.com/waveapp)
3. **Select your carrier.** Your GO X's are preprogrammed to Verizon. If you're boosting a different carrier's signal you'll need to use the Wave app to change the carrier on both amplifiers.
4. **Find the best outdoor antenna location and direction.** This step is the most time-consuming, but it's worth the effort. Getting it right has a huge impact on your system's performance.
5. **"Temporary install" and indoor antenna positioning** – Without making any holes in your roof or walls, temporarily run your twin cable indoors to your GO X's, and find an indoor antenna location with enough separation from the outdoor antenna.
6. **Verify performance and hard-wire everything** – Run speed tests and check your bars – if everything's looking good, it's time to finalize all your cable runs and mount antennas.
7. **Tell us how your system is doing** – We really love hearing how our customer's systems are performing.

Send us an email and let us know how things look.

If anything's unclear, or you're unsure about something, just call us at (800) 761-3041 or email [help@waveform.com](mailto:help@waveform.com). We're generally available from 9 am-5 pm PT, Monday to Friday.

## Quick Introduction to Cellular Signal

One of the most common questions we get asked is: how do I get better data rates?

To understand how to get the highest data rates we need to dig into the details a little. In this section, we'll give you a quick primer on how cell signal works.

### a. Signal Bars

Your phone's signal bars attempt to give you an idea of how "good" your signal is.

How does your phone decide how many bars to show? Well, it measures both the signal strength and signal quality and converts those measurements into a simple indicator.



Having either the low signal strength or low signal quality can limit the number of bars your phone displays.

For example, you can have a strong signal, but if the signal quality is low, you won't have many bars. Or your signal quality might be perfect, but if it's very weak, you still won't see many bars.

However, the real secret is this: **signal bars aren't all that important.**

You can have full bars and very slow data rates. Or you can have 1 bar and super high data rates. We regularly see both!

That's why we don't recommend judging your signal by the number of bars your device is showing. Instead, use a speed test app to measure your data rates indoors before and after you install your GO X MIMO.

You can download our favorite speed test app ("Speedtest by Ookla") by visiting this URL:

[waveform.com/speedtest](https://waveform.com/speedtest)


Go ahead and download that speed test app now, and run a couple of speed tests indoors. You'll notice that your results will fluctuate a little between tests – that's normal.

If your phone's connected to WiFi, the speed test will measure the speed of your WiFi instead of your cellular connection. **Disable your phone's WiFi** and run the test again.

### b. Signal Quality (SINR)

Signal quality is probably **the most important measure of your cell signal**. In 4G LTE networks, signal quality is called "SINR," which stands for "Signal to Interference Plus Noise Ratio."

In general, the better the signal quality, the faster your download speeds will be. Improving this measure can have a big impact on your system's performance. Why does signal quality drop? It's actually because **cell towers interfere with each other**.

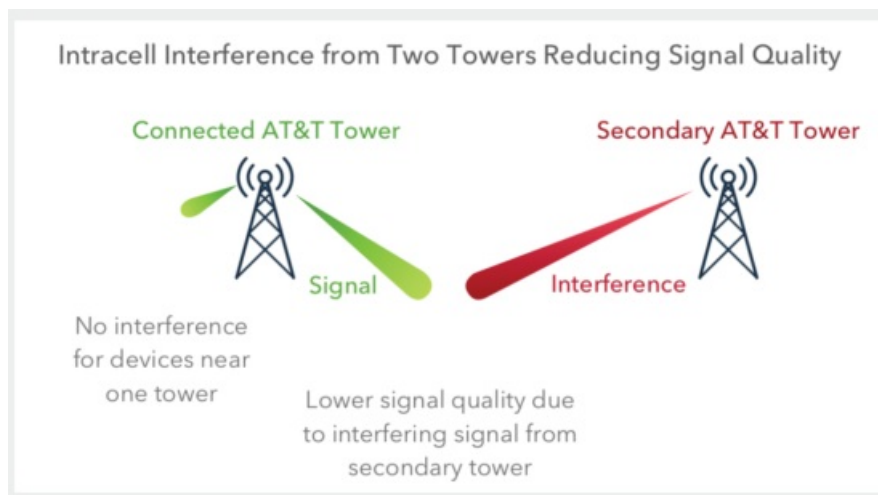

Every cell tower transmits signals on the same set of bands.


If you're located between multiple cell towers, your phone has a hard time clearly "hearing" the cell signal from the tower you're connected to. This is called "intracell interference."

A signal booster like the GO X won't increase your signal quality directly. However, by shielding and aiming the directional outdoor antenna that's included in your kit you can find a higher quality signal, and the GO X's will amplify that signal and rebroadcast it indoors.

We'll explain exactly how to position and aim your outdoor antenna later in this manual.

### c. Signal Strength (RSRP)

The main measure of signal strength for LTE networks is called "RSRP." Signal strength is measured in dBm and is always a negative number.

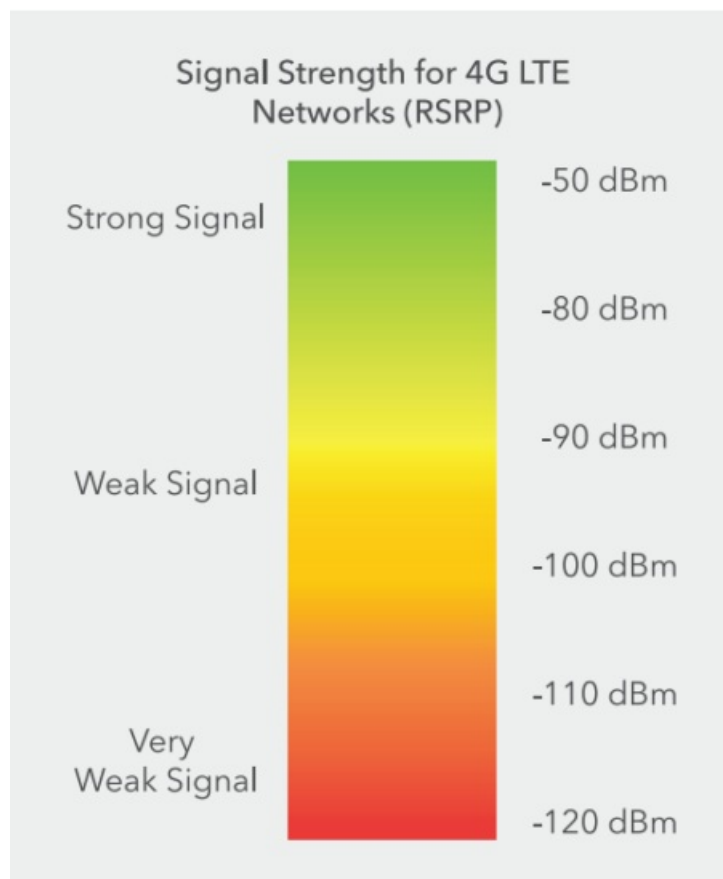

Signal boosters like the GO X amplify your signal so you have higher signal strength. The GO X has 100 decibels of gain (a measure of amplification). That means that it'll cover a larger area with a stronger signal than most boosters.

The stronger signals can help you get better data rates and a more reliable connection. But signal quality is critical as well.

### d. Bands

Your cell phone connects to towers on certain "frequency bands." These bands are licensed to each carrier by the Federal Communications Commission (FCC) in the US.

Each frequency band has a certain "bandwidth" which determines its total data capacity. That capacity is split amongst the users who are connected to it. In general, higher frequency bands (like 1900 MHz and 2100 MHz)

travel less far and penetrate building materials less well than lower frequency bands (like 700 MHz and 800 MHz). As a result, higher frequency bands tend to be less “congested” – they have fewer users connected to them, and data rates are often faster. This isn’t always the case though, sometimes a lower frequency band may have better data rates, depending on your location.

Low Frequency Bands More congested, lower data rates Travel further, penetrate buildings	700 MHz (Bands 12, 13) 850 MHz (Band 5)
High-Frequency Bands Less congested, faster data rates Travel less far, don’t penetrate buildings	1900 MHz (Band 4) 2100 MHz (Band 3)

Newer phones have a feature called “carrier aggregation,” which means that they can connect to multiple bands simultaneously to increase data rates.

The Cel-Fi GO X can boost up to 2 bands simultaneously. Depending on the signal conditions in your area, there may be just 1 cellular band available, or up to 5. After you’ve completed a provisional install, you can experiment with enabling specific frequency bands to see if a particular combination gets you the best speed test results.

Unfortunately, FCC regulations don’t yet allow consumer signal boosters in the US to amplify LTE band 30 (2300 MHz), band 41 (2500 MHz), or band 71 (600 MHz).

Okay, thanks for reading that!

We know that’s a lot of information, but we promise it’ll be helpful as you start your installation.

Our goal is to get you a strong, amplified signal and the best possible signal quality on the bands that get you the best data rates. Let’s get started!


## Wave App and Carrier Selection

First, download the Wave app and make sure that both GO X units are set up to boost your carrier.

**Note:** only **one device** (your phone or tablet) can connect to one

**Cel-Fi GO X** via Bluetooth at a time. But don’t worry – every device in the building will see a better cellular signal, the Wave app is only used to change settings and monitor the GO X’s.

**It’s important that both GO X’s share the same settings.** Any time you make a change to one GO X, make sure to mirror that to both.

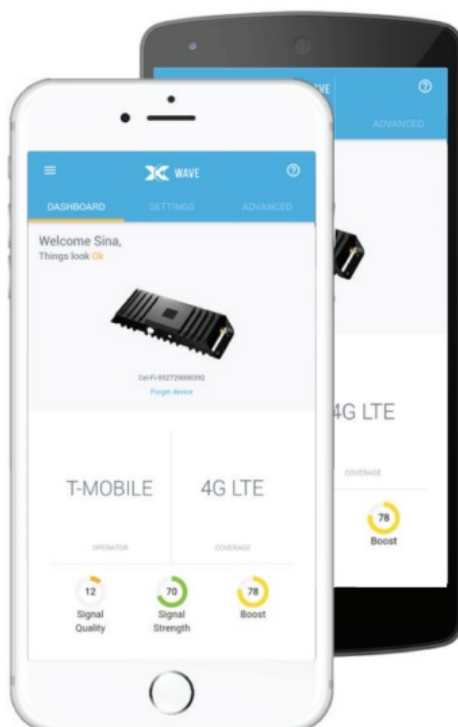



1. Download the Wave app at [waveform.com/waveapp](http://waveform.com/waveapp).
2. Open the app while keeping your phone within 4 feet of both GO X units to start pairing. This may take a few minutes. The app will say “searching” and then allow you to select a system to connect to. **Select either of the devices and hit “Connect”**.
3. **Your GO X's are preprogrammed to boost Verizon**. If you're with a different carrier, go to “Settings” and then the “Operator” section and change it. Changing carriers takes a few minutes – don't turn off your booster or move your phone away during the process.

Note for AT&T customers: if there is a 4G LTE signal outdoors, choose “AT&T LTE Preferred”

This will ensure that the GO X boosts as many LTE bands as possible, instead of boosting 3G.

4. **Now connect to your second GO X by tapping “Connect to another system”** on the dashboard, select the other serial number and repeat step 3 to set the carrier. Before switching, it's helpful to memorize the last couple digits of the serial number of the device you were just connected to so that you can be sure to select the other one.

### Troubleshooting Wave App Pairing:

- If the Wave app is unable to connect to one of your devices, try force closing the app.
- If force-closing the app doesn't help, restart your phone and power cycle the GO X by unplugging the power adapter.

## Understand How The GO X Works

### The GO X “Searches” For Signal

Unlike other boosters, the GO X doesn't blindly amplify every frequency. Instead, it **searches** for and then amplifies, the best signal available for your carrier.





At any given time, the GO X can amplify up to two frequency bands.

In the Wave mobile app, you can watch in the “Advanced” tab as it scans the frequencies on different bands to find the best signal to amplify.

Anytime you power-cycle one of your GO X's, connect or disconnect the outdoor antenna, change the band settings, or change the operator, it will restart scanning to find the best signal. To make sure it scans all frequencies, **restart both GO X units anytime you disconnect and then reconnect the outdoor antenna.**

### Activity Lights

A small light on each GO X flashes to indicate the booster's current status.

	<b>Solid Green:</b> The GO X has found the best band and is amplifying your signal.
	<b>Blinking Green:</b> The GO X is scanning for networks to boost.
	<b>Blinking Red:</b> The unit is in an error condition. Check the app for more information.
	<b>Solid Red:</b> If the status light remains red, the device has a hardware issue. Call us for a replacement.

### Boot-up Sequence

On being plugged in, the GO X activity light will start solid red, then flash red, then move on to blinking green as it starts scanning the cellular frequency bands. Make sure the outdoor antenna is connected to the blinking green as



it starts scanning the cellular frequency bands. Make sure the outdoor port before powering on so the GO X can find a signal.

Finally, once the GO X has found a signal to boost, the activity light will switch to solid green.

## Positioning & Aiming the Outdoor Antenna

Finding the best location for the MIMO outdoor antenna is the most important part of the installation. In this section, we explain the simplest method for positioning and aiming. Section 12 covers some more advanced information you can use to optimize your signal further.

### The Goal

Your aim is to find the best location and direction for the outdoor antenna that maximizes signal strength and in particular, signal quality, for the frequency bands available in your area.


### Set up one GO X as a Signal Meter



To keep things simple, you'll only use one of your GO X's for this step. Keep the other unit turned off.

**If you have a long power extension cable**, we recommend taking the GO X outside with you and using the 5 ft cable included in the kit to set up the GO X as a "signal meter."

Here are all the parts you'll be using. It doesn't matter which port on the antenna you use:

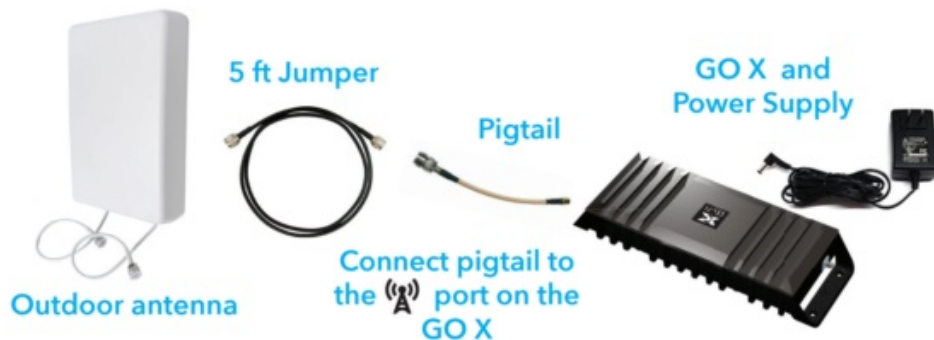


Don't have a long power extension cable? Keep the GO X indoors near a power socket, and use the 30 ft twin coax cable included in the kit (in place of the 5 ft jumper) to take the outdoor antenna outside. The downside of this approach is that you won't easily be able to stay connected to the GO X via Bluetooth, so you may need a second person near the booster watching the Wave app as you test antenna positions.

### Using the Antenna Position Test

The Wave app has a special "Antenna Position Test" that you can find under the "Settings" tab in the "Antenna Settings" dropdown.

Connect to the GO X you're testing with, and start the antenna position test. You'll want to test a few positions around your building.

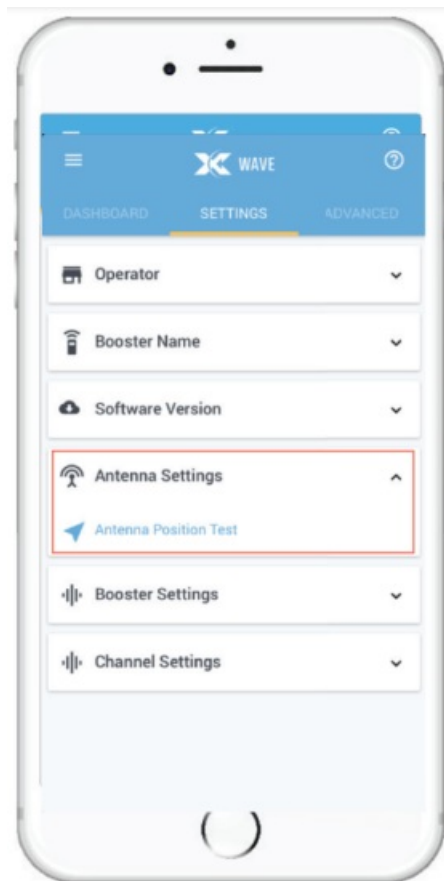

With each location and direction you try, you can “Capture” results. Tests take about a minute each. Ideally, we want to find a location with a score of **115 or higher**.


If you have a very weak or low-quality signal outdoors, then it may be hard to get over 100 or even 90. It’s okay if that’s the case, just find the best score you can. Alternatively, you might find that the first location you try is over 115. That’s great! It’s still worth trying more locations to optimize for the very best signal.

Please note: don’t be surprised if your antenna position score goes down when you connect your internal antenna(s) later on. That’s totally normal!

### How to Position & Aim

Finding the right outdoor antenna location and direction takes some patience, but it’s absolutely worth it. Spending time to get it right will have a big impact on your system’s performance.

Here are all the locations and directions we recommend for testing your outdoor antenna:

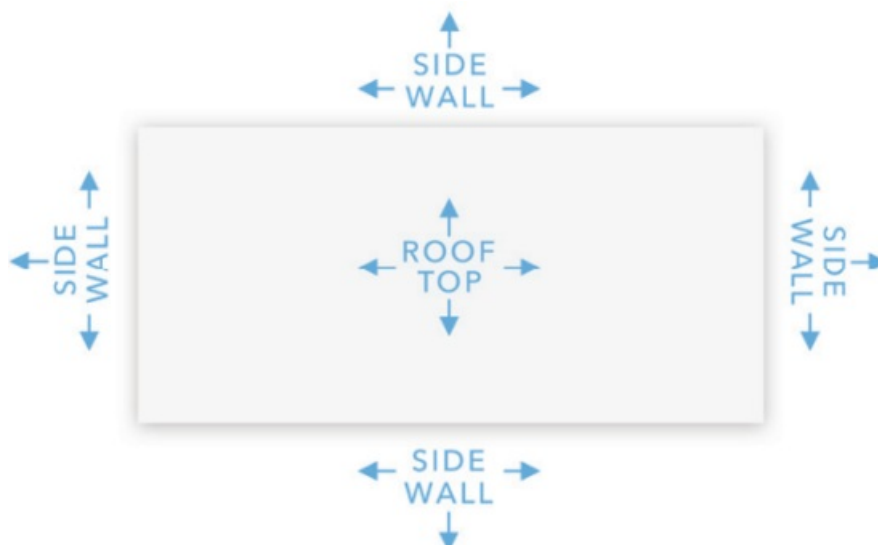

How come we don’t recommend just using the highest point on the roof? It’s simple: while signal strength is generally higher on the roof, signal quality is often better on the side of the building.

In Section 2 of the manual (go back and read it if you haven’t!) we explained that low signal quality happens because of “intra-cell interference.”

The best way to improve signal quality is to “shield” the outdoor antenna from any other towers in the area, by putting it on the side of the building.

When the signal quality outdoors is low, the goal is to shield the outdoor antenna to reduce the signal from other nearby towers:



For some people, the top of their roof (where the signal is the strongest) provides the best signal. For others, it's the side of the house. The only way to find which is best is to test.

## Set up a Temporary Install

Once you've found the best outdoor antenna location according to the Antenna Position Test, it's time to temporarily secure the outdoor antenna, connect the second GO X, and set up a "temporary install."

The following 4 pages explain **mounting the indoor antennas, antenna separation, and how to assemble your GO X MIMO system**. Read them before you start. We recommend securing the outdoor antenna temporarily and running the twin coax cable indoors through a window or a door without drilling any holes. Now connect both of your GO X's and in turn connect them to the indoor antenna.

Once you've done that, you can test your coverage and data rates. If everything is looking good, you can move to a permanent install. More on this in section 10.

If you're having issues with your temporary setup, or aren't happy with the performance, simply **call us at (800) 761-3041 or email [help@waveform.com](mailto:help@waveform.com)**. We'll be happy to help assist – we can often suggest an easy solution to the most common problems.

## Indoor Antennas: Types & Placement

Before choosing a location for your indoor antennas, you'll need to understand how your indoor antennas broadcast signals. Depending on which kit you purchased, you'll have either dome or panel antennas included in the box.


### Panel Antennas

A panel antenna has a narrower "spray" (technically called a "beamwidth"). This means that it directs signal in one direction, and not in a circle, like a dome antenna. Panel antennas should be installed on a wall near the perimeter of the coverage area for best results. For example, you might use a panel at the end of the hallway or at one end of your house.



### Dome Antennas

Dome antennas should be installed in the ceiling, centrally to the area you are looking to cover. Some (but fewer) signals will also radiate upwards to cover the floor above. You'll need to have access to an attic or crawl space to run the cable.

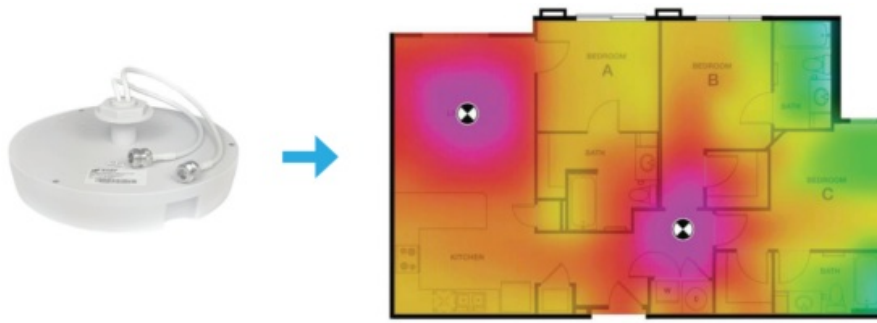

## Indoor Antennas: Separation

### Antenna separation is critical to installing your indoor antennas.

If you don't have enough separation, the Cel-Fi GO X boosters will throttle their gain (amplification) to avoid "oscillation." Oscillation is a type of feedback that occurs if the gain of the system is higher than the "RF separation" between the indoor and outdoor antennas.

You can improve your separation by moving your indoor antenna. Keep your outdoor antenna in the location with the best signal. If you have more than one indoor antenna, the total separation is determined by whichever antenna is closest to the outdoor antenna.

### Example of Poor Separation



Not enough vertical and/or horizontal separation between outdoor and indoor antenna.



Not enough building materials for indoor and outdoor antennas.



### Example of Good Separation




Plenty of vertical and/or horizontal separation.



The outdoor antenna points away from the indoor antenna.




Multiple layers of building materials between antennas.

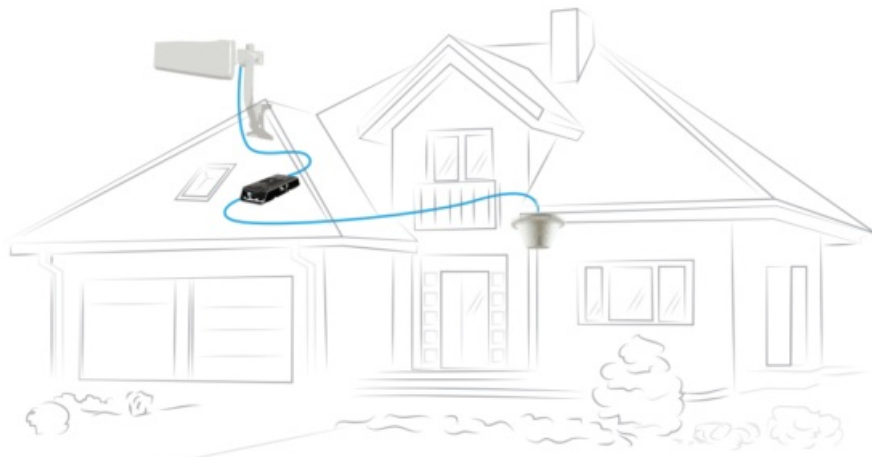

### How to Tell If You Have Enough Separation

The Wave app shows a percentage score for separation on both the Dashboard and Advanced tabs.

Ideally, we want a score of 80% or higher for each “boosting” band, on both boosters. In small buildings that might not be possible – just do the best you can.

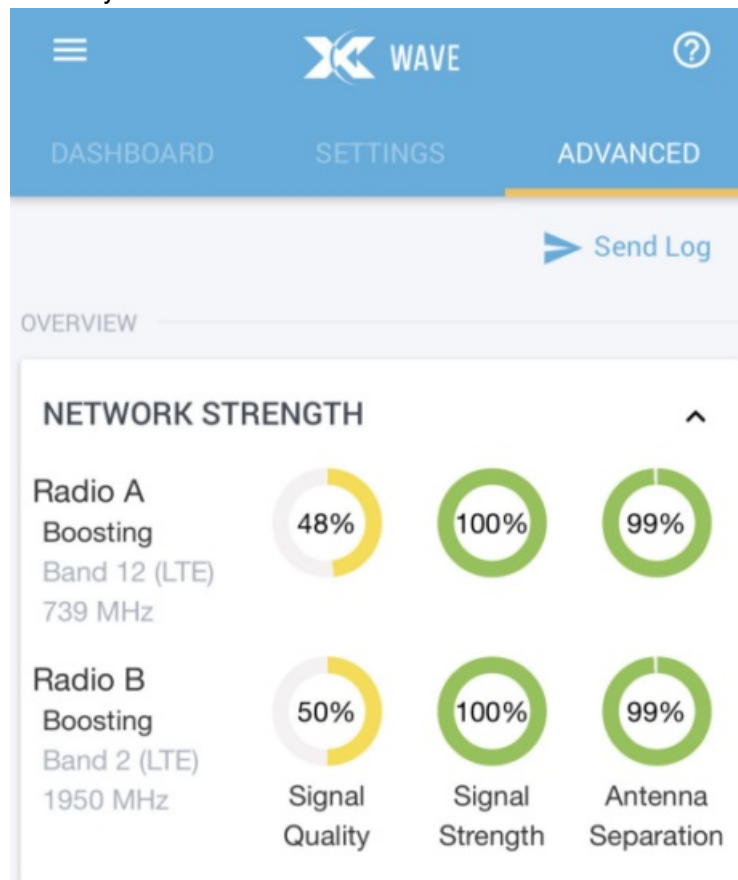

## Assembling Your Kit

### Getting the parts set up

Refer to the diagram to the right as needed

- 1 Secure your outdoor MIMO panel antenna to your mount if you haven't already, and install it outdoors in the antenna position which you found using the method described in section 3.
- 2 Connect each port of the outdoor MIMO panel antenna to the included 5' jumper cables and lightning surge protectors. Instructions on grounding are in the next section of the manual.
- 3 Connect the large N-type ends of one of your twin RS240 coax cables to each of the lightning surge protectors and hand tighten it.
- 4 Connect the smaller SMA-type ends of your twin RS240 cable to the outdoor antenna ports on each of your GO X boosters and hand-tighten them. Note the two icons by the Cel-Fi GO X's two SMA antenna ports:



This port should be connected to the outdoor antenna.



This port should be connected to the indoor antenna.

4 Connect the SMA ends of your second twin RS240 cable to the indoor antenna ports on your two GO X boosters and hand-tighten them.


3 Connect the N-type ends of this twin RS240 cable to each port of the indoor MIMO panel/dome antenna and hand-tighten the connectors.

### **Assembling the J-Mount and Antenna**

The photo to the right shows how the Outdoor Antenna should be secured to the included Antenna Mount.

If you'd like more detailed instructions on how to install the L-bracket to the antenna mount, you can find that online here:

[waveform.com/polemount-instructions](http://waveform.com/polemount-instructions)

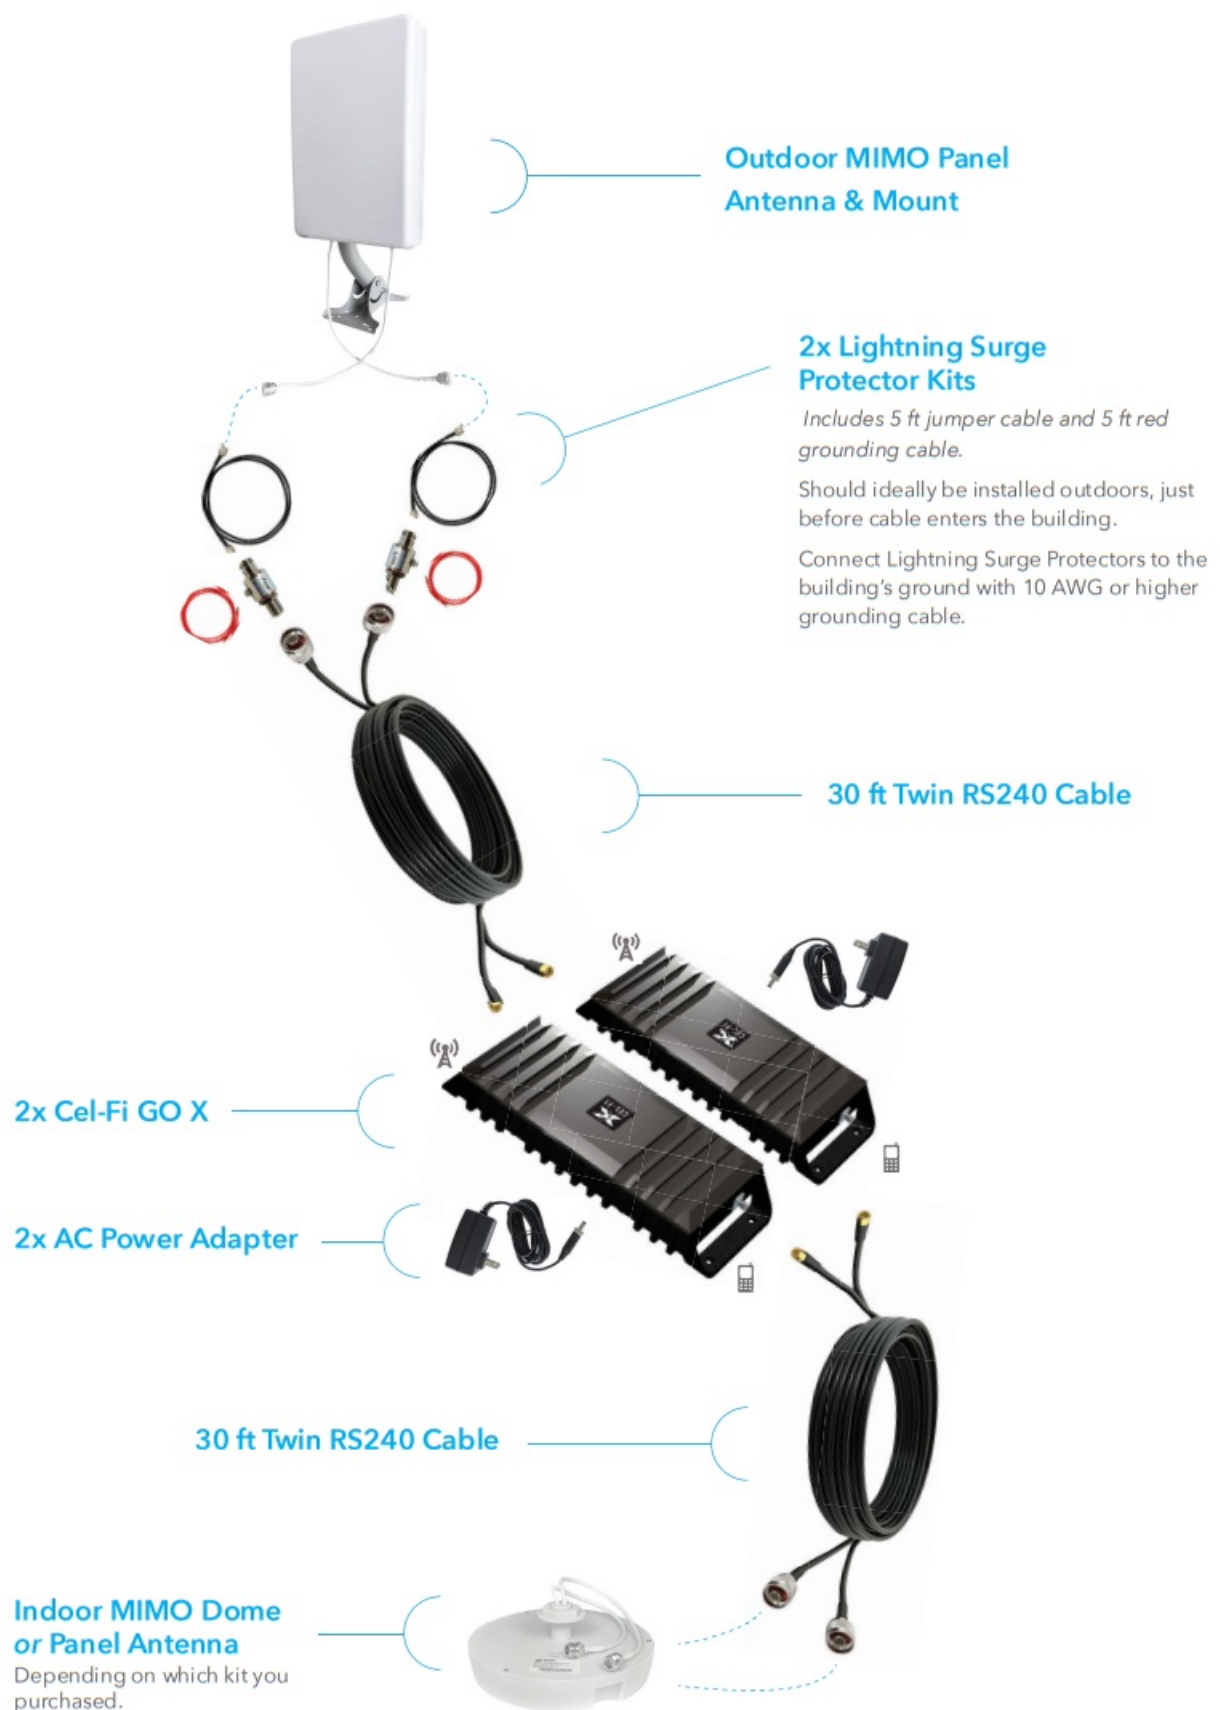

## Test & Install Permanently

Once you're done setting up your temporary install, it's time to test the performance.

If you mostly care about voice calls, simply place a call and walk around your home. If data rates are your primary concern, we recommend testing with the Speedtest app you downloaded from [waveform.com/speedtest](https://waveform.com/speedtest)

If you're using a hotspot, simply connect to it and visit [speedtest.net](https://speedtest.net) in a browser.

**If everything is working well, you can start drilling holes, securing the antennas, and switching to a**



## permanent install.

If you're not happy with the results, don't panic! We can help you figure it out. Call us at (800) 761-3041 or email [help@waveform.com](mailto:help@waveform.com). We're generally available from 9 am-5 pm PT, Monday to Friday., and we can help you optimize your setup.

## A Quick Note on Surge Protection & Grounding

We include two lightning surge protection kits in your GO X MIMO kit to help protect from lightning. The surge protectors should ideally be installed outside, just before the coaxial cable enters your home.

Both the surge protectors and the outdoor antenna mast itself should ideally be grounded. We include two short lengths of grounding cables, but you'll likely need to purchase more. Grounding cable is available at most hardware stores, and we recommend using at least 10 AWG cables. Cable gauges are a little confusing, the numbers increase as the cable gets thinner. So 6 AWG and 8 AWG are both okay, but 12 AWG and 14 AWG are too thin.

If you have a satellite or HDTV antenna on your roof already, it's likely grounded. You should be able to simply ground the mast and the lightning surge protectors to the satellite dish's grounding cable. Alternatively, you can ground your outdoor antenna directly to a grounding rod. Most homes should have a grounding rod, but if yours doesn't you can purchase one easily at a hardware store.

## Weatherproofing Outdoor Connections

We strongly recommend wrapping all outdoor N-type connections with stretch-and-seal self-fusing silicone rubber tape (available from most hardware stores). N-type connectors are outdoor-rated, but water can still sometimes get in and causes a lot of issues.

## Optional: Test Band Combinations

In many areas, the GO X will only find a single band to boost. You can see this under the Advanced tab: one of the GO X's radios will say Boosting and the other will remain

Scanning. If that's the case, there's only a single band available for the GO Xs to amplify.

However, in some areas, your GO X amps may find two bands. If that's the case, you may be able to optimize your data rates by manually testing different bands. Just **make sure you set both GO X's to the exact same band combinations**, or else you won't get a MIMO signal.

Here are the steps we recommend following:

### 1. Discover all available bands


There may actually be more than 2 bands available outdoors. The GO X's will attempt to boost the best two available, but sometimes data rates may be better on other bands. If you manually disable the first two bands that the GO X has selected, you can force both GO X's to scan and show you what other bands are available.

### 2. Test each band individually, then together

When your phone detects multiple bands, it will attempt to "carrier aggregate" and connect on multiple bands simultaneously. Unfortunately, carrier aggregation isn't perfect – sometimes it works well, but in other cases, it can actually decrease your data rates.

To get the absolute best data rates, you can try running speed tests with both GO X's amplifying each band individually, and then testing different combinations of bands.


## How to disable and enable bands

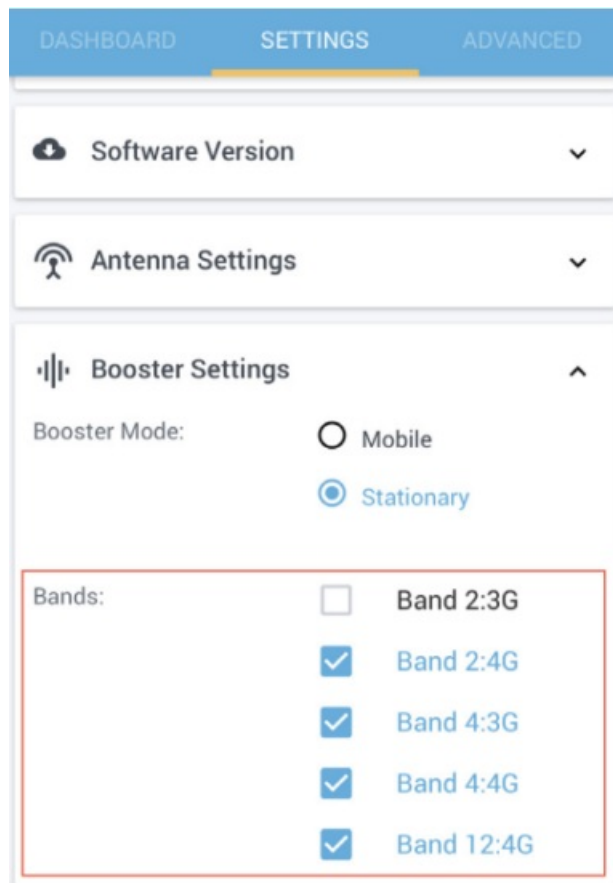

You can disable and enable bands under the “Booster Settings” dropdown in the settings tab of the Wave app. Each time you enable or disable a band, **the GO X’s will rescan to find a signal**. It can take a few moments until the GO X finds and starts boosting the signal. Always set both GO X’s to the same bands. After the GO X’s start amplifying a new band, **toggle on airplane mode on your phone for a few moments, then turn it off again**. This will force your phone to connect to the newly boosted band before you run a speed test.

## The “Advanced” Tab

One of the best features of the GO X is that it actively decodes the cellular signals before amplifying them. You can find out more about the system’s status at any given moment in the “Advanced” tab.

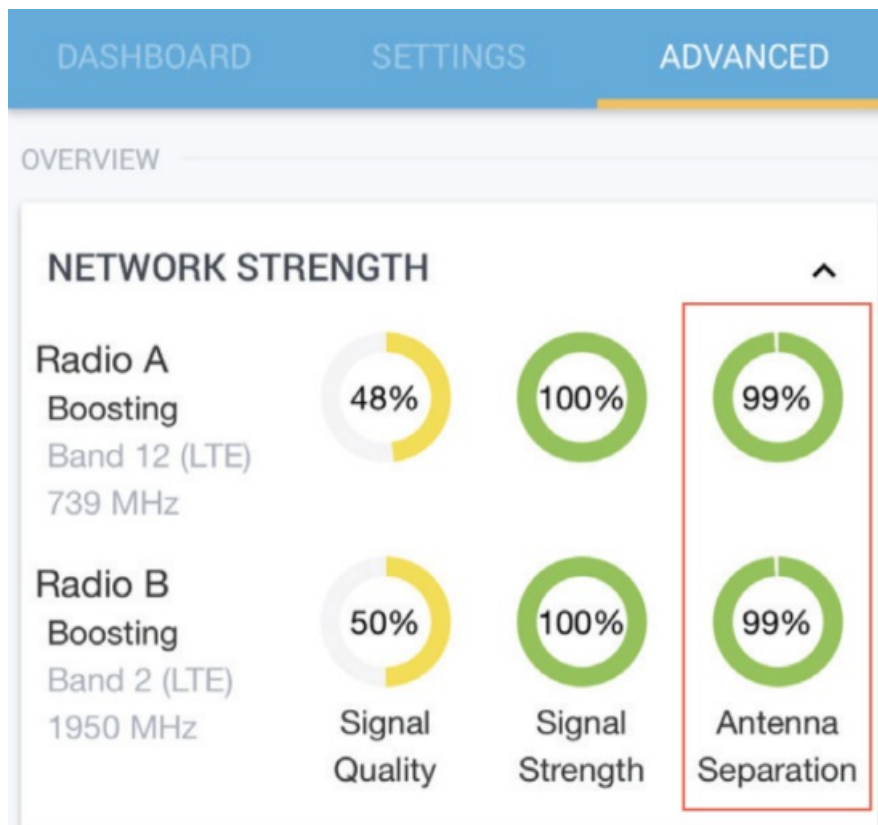

The most important information is summarized at the top of the screen, under the “Overview” section. The information here is divided into two “radios” – the GO X’s two radios are what allow it to amplify up to two bands simultaneously.


For each radio, the advanced tab tells you if it is “scanning,” or if it has found a signal and started “boosting.” When the radio is scanning, you’ll notice that the frequency changes often. Once it’s boosted, the frequency will no longer change.

Once the GO X is boosting on one of the radios, the Wave app will show a percentage for signal quality, signal strength, and antenna separation. Signal quality and signal strength are determined by your outdoor antenna’s location and direction. Antenna separation is determined by the separation between the indoor antennas to the outdoor antenna.

**The goal during the installation is to get the highest numbers possible for each of these percentages. But sometimes, despite your best efforts, these numbers may remain low. That’s okay – they’re just a guide to help you during the installation.**

The GO X also gives a lot more diagnostic information under the “Super Channels” dropdowns for each boosted band.

**You won’t need to use this information in most cases, but we’ve documented some of the most important numbers below.**

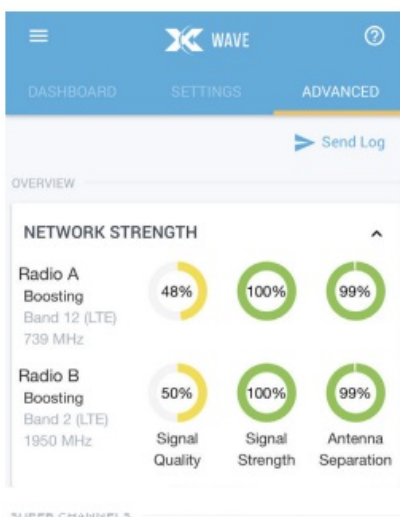

The “Send Log” button allows you send a diagnostic log from your device if our support team needs one.

## "Super Channel" Diagnostics Information

This section lists diagnostic information on the two bands being amplified. Select a Radio to expand the details (as shown).

Radio A Band 4: LTE (Boosting)	
Description	Value
Bandwidth	20 MHz
Downlink center freq.	2145 MHz
Uplink center freq.	1745 MHz
PCI	312
Donor RSSI	-46 dBm
Donor RSRP	-76 dBm
Donor RSRQ	-10 dB
Donor SINR	3 dB
Downlink TX power	5 dBm
Uplink TX power	-100 dBm
Ext. antenna in use	Yes
Uplink Safe Mode Gain	63 dB
Downlink System Gain	60 dB
Uplink System Gain	0 dB
Downlink Echo Gain	-7 dB
Uplink Echo Gain	-50 dB

The "Donor RSRP" value shows the signal strength being received from the outdoor antenna.

The "Donor SINR" is a measure of signal quality. Ideally, you want a number higher than 3 dB here. The higher the SINR, the more bars, and the better your data rates.

The "Downlink TX Power" shows the strength of the signal being rebroadcast. The higher this number, the greater the coverage area. Ideally you want 0 dBm or higher.

The Uplink and Downlink System Gain show the current uplink and downlink amplification of the system. Uplink may sometimes show 0 dB when phones aren't in use. That's normal.

The "Echo Gain" reflect how much separation you have between the outdoor antenna and the indoor antennas. If either number is at or near 10 dB, you'd benefit from more separation.

## Some Final Tips

- **If you unplug any of the cables on the outdoor antenna side, make sure to reset both GO X's.**

The GO Xs will start scanning as soon as you unplug the cable to the outdoor antenna.

To make sure they can all frequencies, restart both units after you reconnect the cable.

- **If you have an extra cable, don't coil it tightly.**

If you have extra cable, make sure to keep any cable loops as large as possible to minimize negative side-effects (4 ft or wider loops are best).

- **Use the percentages shown at the top of the Advanced tab.**

After you've optimized the outdoor antenna location using the Antenna Position Test, use the percentages at the top of the Advanced tab to keep your eyes on what the GO X's are doing, and potentially to further optimize your signal.

## Upgrading Antennas

If you have a direct line of sight to the nearest tower (no obstructions, including trees) and you'd like to increase your signal quality and strength even further, you may want to consider upgrading your outdoor antenna.

We particularly recommend Griddy: The Grid Parabolic Antenna, which offers up to 23 dBi gain on the 1900 MHz and 2100 MHz bands (Bands 2 and 4), and up to 13 dBi gain on 700/850 MHz bands (Bands 12, 13, and 5). **If you choose to upgrade, you'll need two of these antennas to replace your outdoor MIMO Panel Antenna.**

Feel free to call us at (800) 761-3041 if you're unsure whether the grid parabolic antennas would help in your

situation.



**RSRF Grid Parabolic Antenna**  
[waveform.com/grid-parabolic](http://waveform.com/grid-parabolic)

## Tell Us How It Works

Did your installation go great? Are you having trouble aiming your outdoor antenna? Do you think our manual could be improved? Are your data rates not quite what you were hoping?

**We'd love to hear from you:** send us an email at [help@waveform.com](mailto:help@waveform.com) or call us.

We're not a huge, nameless corporation with lots of bureaucracy. **There is a small team of us** who wrote this manual and provide support for the GO X, and we love nerding out over how to get the absolute best cell signal in any given situation.

So please, reach out!

## Excited about your GO X MIMO?

**Get \$100+ for each friend, family, or neighbor you refer.**

Hopefully, by the time you've finished installing and tuning your GO X MIMO kit, you're as excited about this system as we are.

One of our biggest challenges is spreading the word. Most people don't know that products like the GO X exist.

Help us get the word out: everyone you refer gets 5% off their kit, and we'll also give you 5% of whatever they spend in cash (via Paypal). On a GO X MIMO kit, that's over \$100 for each customer you refer.

Simply visit [waveform.com/referrals](http://waveform.com/referrals) to get started.



# WAVEFORM

## Need help? We're ready and waiting.

Signal boosters aren't always easy to install. In fact, getting everything up and running can sometimes be a pain. But the end result is worth it.

One of the benefits of buying from Waveform is our **lifetime technical support** on every system we sell. We've installed hundreds of these devices ourselves, and can walk you through troubleshooting and fine-tuning your installation for the best results.

Simply call us at (800) 761-3041 or email [help@waveform.com](mailto:help@waveform.com). We're generally available from 9 am-5 pm PT, Monday to Friday.

We **love** helping solve tricky install problems.



52 Maxwell, Irvine, CA 92618




+1 (800) 761-3041



[www.waveform.com](http://www.waveform.com)  
[help@waveform.com](mailto:help@waveform.com)

## Documents / Resources

	<p><a href="#">Cel-Fi GO X MIMO Signal Booster System</a> [pdf] Instruction Manual GO X MIMO, Signal Booster System, GO X MIMO Signal Booster System</p>
---	--

Manuals+