

CELESTRON X9 Bluetooth Remote Instructions

Home » Celestron » CELESTRON X9 Bluetooth Remote Instructions

USING THE BLUETOOTH REMOTE






To insert or replace the battery, place your thumb in the center of the back cover. pressing inward and sliding

downward remove the battery door. The CR2032 battery; should be inserted with the positive (+) side facing upward. Replace the cover.



Press and hold the button on the remote for 5 seconds. A blue light will turn on and, after a few seconds, start to blink. The remote is now in pairing mode.

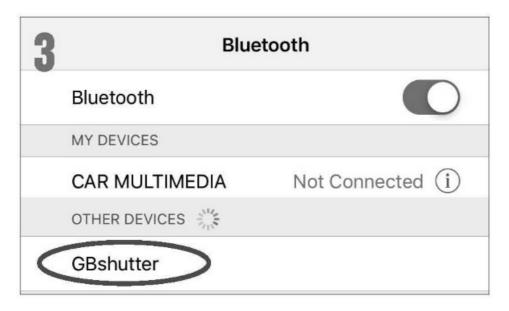

Using the Bluetooth settings on your phone, pair the device called "GBshutter.



Open your camera app. Press the button on the remote to trigger the shutter on your phone.



If your camera is in video mode, you can press the button once to start recording and again to stop the recording.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction

Contents

- 1 Documents / Resources
- 2 Related Posts

Documents / Resources



<u>CELESTRON X9 Bluetooth Remote</u> [pdf] Instructions X9, 2A2FG-X9, 2A2FGX9, X9 Bluetooth Remote, Bluetooth Remote, Remote

Manuals+,