

CHAMPION
201274 Open
Frame Inverter



CHAMPION 201274 Open Frame Inverter User Guide

[Home](#) » [Champion](#) » CHAMPION 201274 Open Frame Inverter User Guide 

Contents

- [1 CHAMPION 201274 Open Frame Inverter](#)
- [2 Product Usage Instructions](#)
- [3 SET UP](#)
- [4 FAQ](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)

CHAMPION

CHAMPION 201274 Open Frame Inverter



Product Specifications

- **Model:** 201274
- **Power Output:** 4250W
- **Type:** Open Frame Inverter

Product Usage Instructions

Setup

1. **Remove brackets:** Remove shipping support brackets.
2. **Attach wheel kit:** Install the wheel kit.
3. **Add oil:** Add engine oil (Recommended: 10W-30, up to 16.9 fl. oz. / 500 ml).

Make sure shipping brackets are removed before adding oil.


Moving and Fueling

1. Move the generator outdoors: Only use outside and far away from windows, doors, and vents.
2. Add fuel: Add gasoline (Do NOT use E15 or E85).

Start-Up

Never start or stop the generator with electrical devices connected or turned on.

PARTS INCLUDED

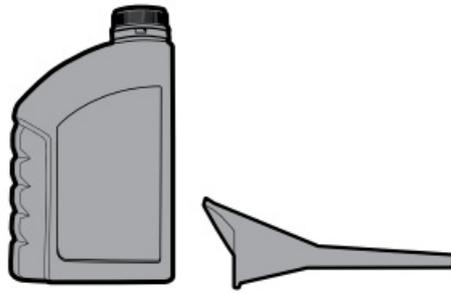

DANGER

MOVE GENERATOR OUTDOORS

- Using a generator indoors **CAN KILL YOU IN MINUTES**. Generator exhaust contains carbon monoxide. This is a poison you cannot see or smell.
- **NEVER** use inside a home or garage, **EVEN IF** doors and windows are open.
- **ONLY** use **OUTSIDE** and far away from windows, doors, and vents.

WARNING


- Read the **ENTIRE** operator's manual to become familiar with the features of this product before operation. This QuickStart Guide **IS NOT** a substitute for the Operator's Manual.
- Failure to operate the product correctly could result in damage to the product, personal property or cause serious injury or death.

NOTICE


Keep all objects at least 5 feet (1.5 m) from generator. Heat from the muffler and exhaust gas can ignite combustible materials.

SET UP

1. Remove brackets. Assembly > Remove Shipping Support Brackets.

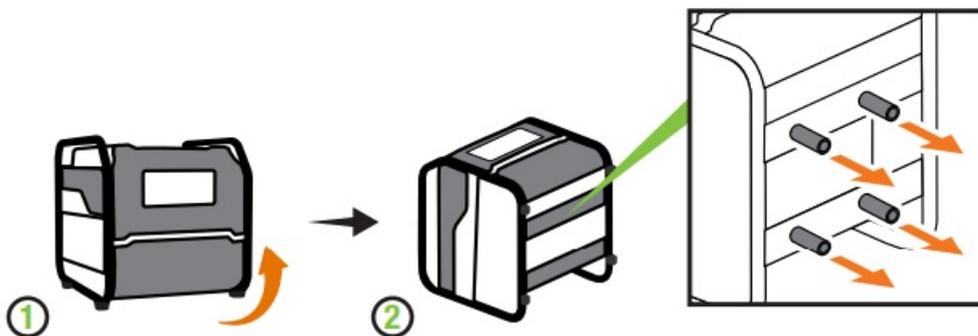


2. Attach wheel kit. Assembly > Install Wheel Kit

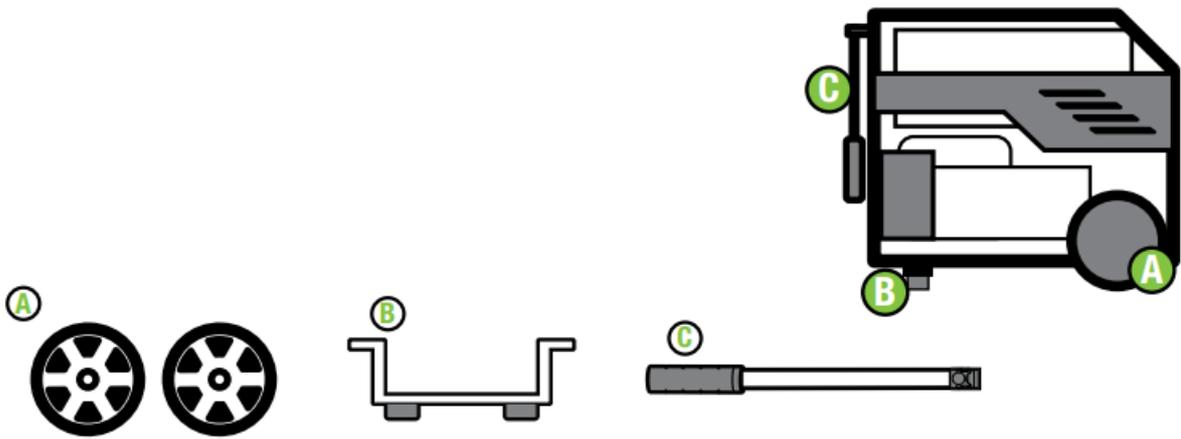

3. Add oil. Assembly > Add Engine Oil

Recommended: 10W-30, up to 16.9 fl. oz. (500 ml). DO NOT overfill.

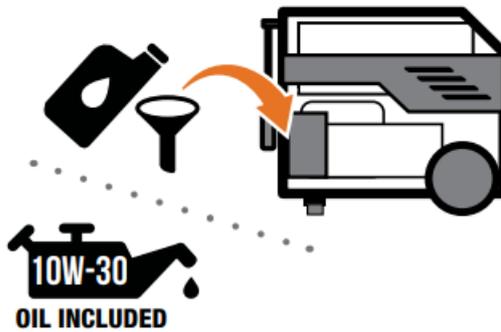


MAKE SURE SHIPPING BRACKETS ARE REMOVED BEFORE ADDING OIL.

4. Move the generator outdoors.



5. Add fuel. Assembly > Add Fuel: Gasoline DO NOT use E15 or E85.

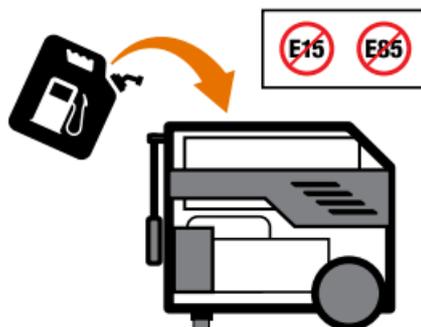

DO NOT USE E15 OR E85. NO USE E15 O E85.


6. DO NOT plug in any electrical devices. NEVER START OR STOP THE GENERATOR WITH ELECTRICAL DEVICES CONNECTED OR TURNED ON!




7. Turn the fuel valve "ON".



8. Press the engine switch to the "ON" position.

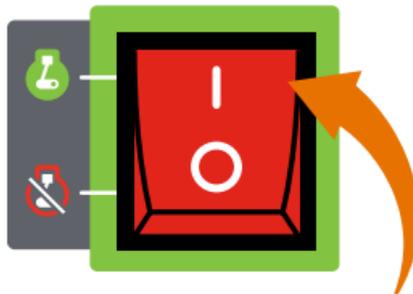


9. Pull the choke knob out to the "CHOKE" position.



10. Pull the recoil to start the engine.




11. Move the choke lever to the "RUN" position.



12. Plug in. Operation > Connecting Electrical Loads.



Visit our YouTube channel to watch our how-to videos and subscribe to view our latest videos on our Champion Power Equipment products!

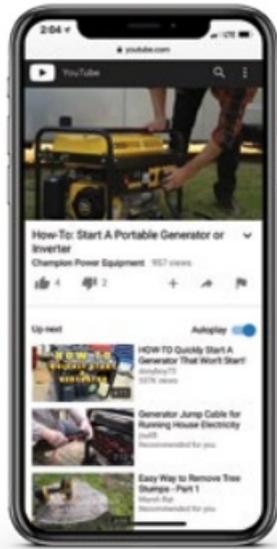

[CHAMPIONPOWEREQUIPMENT.COM](https://www.championpowerequipment.com)

FAQ

Q: Can I use the generator indoors?

A: No, using the generator indoors can be fatal due to carbon monoxide poisoning. Always operate it outdoors.

Q: What type of oil should I use?

A: It is recommended to use 10W-30 oil, up to 16.9 fl. oz. (500 ml), and do not overfill.

Q: Can I use E15 or E85 fuel?

A: No, do not use E15 or E85 fuel in the generator.

Documents / Resources



[CHAMPION 201274 Open Frame Inverter](#) [pdf] User Guide
201274 Open Frame Inverter, 201274, Open Frame Inverter, Frame Inverter, Inverter

References

- [User Manual](#)

Manuals+. [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.