



CHIEFTEC ERC PSU Smart Fan User Guide

Home » CHIEFTEC » CHIEFTEC ERC PSU Smart Fan User Guide 🖔



PSU GUIDE 2023













www.chieftec.eu

Contents 1 ERC PSU Smart Fan 2 ATX 3.0 DEFINITION: 3 PCIe GEN 5.0 12VHPWR DEFINITION: 4 PowerPlay PLATINUM (PERFORMANCE) 5 PowerUP GOLD (PERFORMANCE) series 6 STEELPOWER (PERFORMANCE) series 7 POLARIS PRO(PERFORMANCE) series 8 POLARIS (PERFORMANCE) series 9 CORE (PERFORMANCE) series 10 PROTON (PERFORMANCE) series 11 SILICON (PERFORMANCE) series 12 A - 90 (PERFORMANCE) series 13 PHOTON GOLD (RGB) series 14 PHOTON (RGB) series 15 VOLTA (RETAIL) series 16 TASK (RETAIL) series 17 ELEMENT (RETAIL) series 18 A - 80 (RETAIL) series 19 ECO (RETAIL) series 20 FORCE (RETAIL) series 21 SMART (RETAIL) series 22 iARENA-II (BULK/OEM) series 23 iARENA-IV (BULK/OEM) series 24 VALUE (BULK/OEM) series 25 iARENA-III (BULK/OEM) series 26 iARENA-I (BULK/OEM) series 27 SMART (SFX PERFORMANCE) series 28 SMART (SFX) series 29 SMART (BFX) series 30 COMPACT (SFX PERFORMANCE) series 31 SMART (TFX) series 32 PRODUCT REAEARCH & DEVELOPEMENT 33 Product developement / R&D **34 QUALITY CONTROL**

ERC PSU Smart Fan

35 CHIEFTEC 3CONTROL CENTER

36 Documents / Resources

PSU stands for POWER SUPPLY UNIT and plays a decisive and vital role in every PC configuration since it is "the heart" of your PC.

The installed components of your PC have different levels of power (electricity) consumption, voltages, efficiencies and connectors which are managed & serviced by the POWER SUPPLY UNIT.

Therefore, it is important to choose the right POWER SUPPLY UNIT for your PC, based on the intended applications to be run.



Applications could include: Gaming, mining, workstation/servers, office PCs, home PCs, POS systems, etc... POWER SUPPLY UNITs come in different formats, pending on the chassis format they are to be installed into. Most popular ones include:









• ATX \rightarrow

Size: 140 mm (160mm) x 150 mm x 86 mm

Wattages: 350W - 1450W

 $\bullet \, \text{SFX} \, \to \,$

Size: 125 mm x 100 mm x 64 mm

Wattages: 250W -650W

 $\bullet \text{ TFX} \to$

Size: 175 mm x 85mm x 64 mm Wattages: 250W – 400W • External Power Adapter Wattages: 85W & 120W

EFFICIENCY DEFINITION:


Products are defined as "EFFICIENT", if they have 80% or more energy efficiency at 20%, 50% and 100% load and a power factor of at least 0.9 at 100% load.

ADVANTAGE:

Pending on the efficiency level of the product, 20% or less electric energy is dissipated/lost in form of heat at specified load levels thereby reducing electricity use/consumption and resulting in much cheaper/lower bills, not to oversee the environmental advantages.

EFFICIENCY LEVELS:

Percentage of rated lo ad	10%	20%	50%	100%
80 Plus		80%	80%	80%
80 Plus Bronze		82%	85%	82%
80 Plus Silver		85%	88%	85%
80 Plus Gold		87%	90%	87%
80 Plus Platinum		90%	92%	89%
80 Plus Titanium	90%	92%	94%	90%

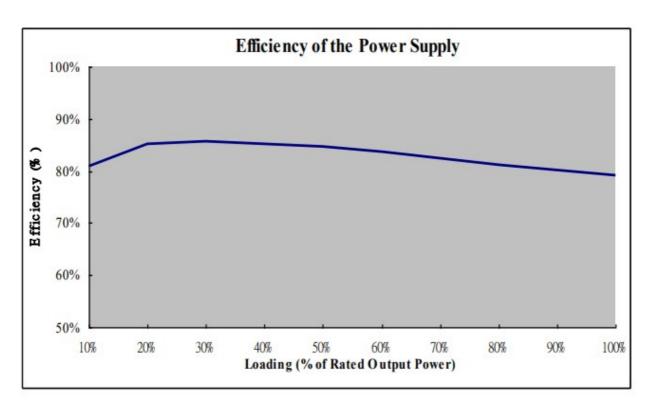



ATX 3.0 DEFINITION:

supply interface of the graphics card, using 12+4 pins, and the maximum power supply can reach 600W, which is mainly used to meet the power supply requirements of PCIe 5.0 graphics cards.

Increase the peak power supply in the blink of an eye, 10% duty cycle, 100 microseconds, and undertake 200% index efficiency.

Duty Cycle	Time for Po		Tim	e Constant (TC)		Power T,E		Power 0 TC	
10%	100 ps		900 ps		2000	W	817 W		
20%	1 ms		4 ms		1800	W	663 W		
25%	10 ms		30 ms		1600	W	693 W	1	
50%	100 ms		100 ms		1200	W	749 W		
Output	Range		Min	Nom		Max		Unit	
+12V1DC:	-5% / -7%	+11.2	20	+12.00		+12.60		V	
+12V2DC	-5% / -7%	+11.2	20	+12.00		+12.60		V	
+SVDC	-5%	+4.75	,)	+5.00		+5.25		V	
+3.3VDC	+S%	+3.14	ļ	+3.30		+3.47		V	
-12VDC'	±10%	-10.8	30	-12.00		-13.20		V	
+SVSB	— 5%	+4.75	j	+5.00		+5.25		V	

Output	PSU without PCIe* 12VHPWR C 450 Watts)	onnectors (Rated Size 5	PSU with PCIe* 12VHPWR Connecto r (Rated Size >450 Wafts)				
All +12V	2.5 A/ps	2.5 A/ps					
+5V	1.0 A/ps		1.0 A/ps				
+3.3V	1.0 A/ps		1.0 A/ps				
+SVSB	0.1 A/ps		0.1 A/ps				
-12V	0.1 A/ps		0.1 A/ps				
	sion Wo of PSU Rated Size PSU & PSUs without Connector	Power Excursion We of PSU Rated Size PSU > 450 Watts & 12VMPWR Connector present	Time for Power Excursion (U)	Testing Duty Cycle			
100%		100%	Infinite	_			
110%		120%	100 ms	50%			
135%		160%	10 ms	25%			
145%		180%	1 ms	20%			
150%		200%	100 ps	10%			

PCIe GEN 5.0 12VHPWR DEFINITION:


INTEL calls the 4 pins of 12VHPWR SIDEBAND SIGNALS, power supply manufacturers can set 150W/300W/450W/600W four power levels to control and tell the graphics card the highest (auxiliary) power it can get from it . Pending on the efficiency level of the product, 20% or less electric energy is dissipated/lost in form of heat at specified load levels thereby reducing electricity use/consumption and resulting in much cheaper/lower bills, not to oversee the environmental advantages.

- All 12 Power Contacts Rated up to 9.2A
- · Completely separate terminals



PCles AIC Power (W)	CPU Continuo	ous Power (W)	Rest of Platform (W)		PSU Rated PSU S ize (W)
75	275		100		450
150	300		100		550
225	300		125		650
300	300		150		750
450	300		250		1000
600	300		300		1200
Sense0	Senses	Initial Permitte	d Power at System Power Up		Sustain Power after Configuration
Gnd	Gnd	375 W		600 W	
Open	Gnd	225 W		450 W	
Gnd	Open	150 W		300 W	
Open	Open	100 W		150 W	

24PIN→ Main power connector for motherboards (20 + 4 PINs ATX)

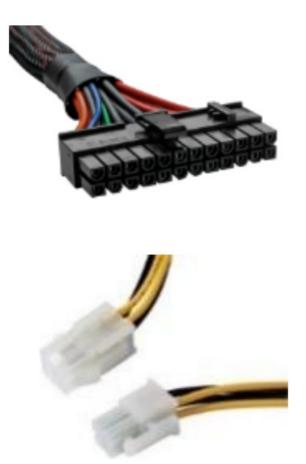

4PIN 12V→ CPU power connector (P4 power connector) ATX 12V power connectors on motherboards. For most computers, you will just need to connect a single 4 pin connector.

8PIN EPS (4+4) 12V \rightarrow A hybrid of the 4 PIN ATX12V and EPS 12V connectors that can be split in half or combined to accommodate either the EPS 12V Socket or the ATX 12V socket. Provides additional power to the CPU.





6PIN PCIe→ PCI Express power cable used to power GPUs/graphic cards with higher power demand. **8PIN PCIe** (6+2)→ PCI Express power cable used to power premium GPUs/graphic cards with high power


demand.





16PIN PCIe GEN 5→ 12VHPWR Cable Plug Connector used to power premium GPUs/graphic cards with high power demand

Molex → power connector for IDE HDDs & ODDs. Although old standard, MOLEX can be hijacked with adapters to provide SATA, 8PIN PCIe or 8PIN EPS 12V additional connectors.

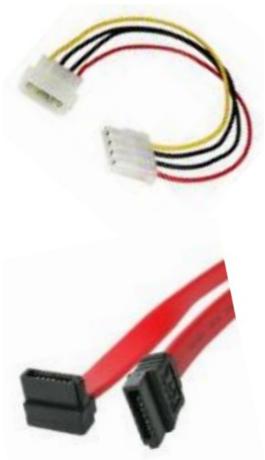

SATA→ Serial-ATA power cable connectors for SATA HDDs/SSDs and ODDs



Floppy → FFD for floppy drives. Basically not required anymore.

NOTE: the amount and types of connectors on a PSU determine the amount and type of mainboards, add-on cards and peripherals that can be installed and what technology is compatible.



PERFORMANCE POWER SUPPLIES

DESIGNER FAN GRILL
JAPANESE CAPACITORS
MAXIMUM EFFICIENCIES
ACCESSORIES BAG INSIDE
DOUBLE FWD. PCB TECHNOLOGY
xTRA LONG, BLACK & FLAT CABLES
MAXIMUM PROTECTION FEATURES
NON-AUDIBLE BALL & FDB-BEARING FANS
BUILT FOR GAMING & ABSOLUTE HIGH PERFORMANCE

PowerPlay PLATINUM (PERFORMANCE) series









Models: GPU-850FC & GPU-1050FC Unique Selling Points:

- GAMING/HIGH PERFORMANCE
- 80PLUS PLATINUM
- JAPANESE CAPS.
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm FDB (silent) FAN
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC full bridge resonant design
- DC to DC technology
- +12V Single Rail technology

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GPU-850FC	1	9	3	x	x	6	2	1
GPU-1050FC	1	9	3	х	x	8	2	1

PowerPlay GOLD (PERFORMANCE) series

Models: GPU-550FC, GPU-650FC & GPU-750FC









Unique Selling Points:

- GAMING/HIGH PERFORMANCE
- 80PLUS GOLD
- JAPANESE
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm FDB (silent) FAN
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC full bridge resonant design
- DC to DC technology
- +12V Single Rail technology

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2	8PIN EPS (4+4)	Flopp y
GPU-550FC	1	6	3	х	x	2	1	1
GPU-650FC	1	9	3	х	x	4	1	1
GPU-750FC	1	9	3	х	x	4	1	1

PowerUP GOLD (PERFORMANCE) series







Models: GPX-550FC, GPX-650FC, GPX-750FC & GPX-850FC Unique Selling Points:

- GAMING/HIGH PERFORMANCE
- 80PLUS GOLD
- JAPANESE
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm FDB (silent) FAN
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC full bridge resonant design
- DC to DC technology
- +12V Single Rail technology

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GPX-550FC	1	6	3	х	x	2	2	1
GPX-650FC	1	9	3	х	х	2	2	1
GPX-750FC	1	9	3	х	х	4	2	1
GPX-850FC	1	9	3	х	х	6	2	1

STEELPOWER (PERFORMANCE) series

Models: GPX-550FC, GPX-650FC, GPX-750FC & GPX-850FC







Unique Selling Points:

- GAMING/HIGH PERFORMANCE
- 80PLUS GOLD
- JAPANESE
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 12cm FDB (silent) FAN
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC half bridge resonant design
- DC to DC technology
- +12V Single Rail technology

Model	24PI N	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
BDK-550F C	1	6	3	x	x	2	2	1
BDK-650F C	1	6	3	x	x	4	2	1
BDK-750F C	1	6	3	x	x	4	2	1

PERFORMANCE POWER SUPPLIES

Designed TO INTEL'S ATX 3.0 STANDARD
SUPPORTS PCIe GEN 5
QUALITY CAPACITORS
MAXIMUM EFFICIENCIES
ACCESSORIES BAG INSIDE
DOUBLE FWD. PCB TECHNOLOGY
xTRA LONG, BLACK & FLAT CABLES
MAXIMUM PROTECTION FEATURES
NON-AUDIBLE BALL & FDB-BEARING FANS
BUILT FOR GAMING & ABSOLUTE HIGH PERFORMANCE

POLARIS PRO(PERFORMANCE) series













Models: PPS-1300FC*(New) Unique Selling Points:

- DESIGNED TO INTEL'S ATX 3.0 STANDARD
- SUPPORTS PCIe GEN 5
- GAMING/HIGH PERFORMANCE
- 80PLUS GOLD
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm BALL BEARING (silent) FAN
- SECURITY FEATURES: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC Half-Bridge converter with DC-to-DC technology
- +12V Single Rail technology

Model	24PI N	SAT A	Mole x	16PIN PCIe G EN5	6PIN PC le	8PIN PCIe (6+ 2)	8PIN EPS (4+ 4)	Floppy
PPS-1300FC	1	12	4	1	x	6	2	1

POLARIS 3.0(PERFORMANCE)series



Models: PPS-850FC-A3, PPS-1050FC-A3 & PPS-1250FC-A3*(New) Unique Selling Points:

- DESIGNED TO INTEL'S ATX 3.0 STANDARD
- SUPPORTS PCIe GEN 5
- GAMING/HIGH PERFORMANCE

- 80PLUS GOLD
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm BALL BEARING (silent) FAN
- SECURITY FEATURES: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC Half-Bridge converter with DC-to-DC technology
- +12V Single Rail technology

Model	24PIN	SAT A	Mole x	16PIN PCIe GE N5	6PIN PCI e	8PIN PCIe (6+ 2)	8PIN EPS (4+ 4)	Flop py
PPS-850FC	1	12	4	1	x	2	2	х
PPS-1050FC	1	12	4	1	х	4	2	х
PPS-1250FC	1	12	4	1	х	4	2	х

POLARIS (PERFORMANCE) series



Models: PPS-550FC, PPS-650FC, PPS-750FC, PPS-850FC, PPS-1050FC & PPS- 1250FC Unique Selling Points:

- GAMING/HIGH PERFORMANCE
- 80PLUS GOLD
- RETAIL (incl. Pwr cord + accessories)

- 100% MODULAR
- 14cm BALL BEARING (silent) FAN
- SECURITY FEATURES: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC Half-Bridge converter with DC-to-DC technology
- +12V Single Rail technology

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
PPS-550FC	1	6	3	х	x	2	2	1
PPS-650FC	1	6	3	х	x	4	2	1
PPS-750FC	1	8	3	х	х	4	2	1
PPS-850FC	1	12	4	х	x	4	2	х
PPS-1050FC	1	12	6	х	х	6	2	х
PPS-1250FC	1	12	6	х	х	6	4	х

CORE (PERFORMANCE) series



Models: BBS-500S, BBS-600S & BBS-700S <u>Unique Selling Points:</u>

• GAMING/HIGH PERFORMANCE

- 80PLUS GOLD
- RETAIL (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- DIRECT CABLES
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- LLC half bridge resonant design & DC to DC technology
- +12V Single Rail technology

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
BBS-500S	1	4	3	x	x	1	1	1
BBS-600S	1	6	3	x	x	2	1	1
BBS-700S	1	6	3	х	x	2	2	1

PROTON (PERFORMANCE) series







Models (CABLES): BDF-400S, BDF-500S & BDF-600S Models (MODULAR): BDF-650C, BDF-750C, BDF-850C & BDF-1000C

Unique Selling Points:

• GAMING/HIGH PERFORMANCE

- 80PLUS BRONZE
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR for all "C" models
- DC-2-DC technology
- Xtra long & flat uni-color cables
- 14cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP

Model	24PI N	SAT A	Mole x	6PIN PCI e	8PIN 12V	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
BDF-400S	1	3	3	1	Х	x	1	х
BDF-500S	1	6	3	x	х	2	1	х
BDF-600S	1	6	3	x	х	2	1	х
BDF-650 C	1	6	3	х	х	4	1	1
BDF-750 C	1	6	3	x	х	4	1	1
BDF-850 C	1	9	3	х	1	6	1	1
BDF-1000 C	1	9	3	х	1	6	1	1

SILICON (PERFORMANCE) series







Models: SLC-650C, SLC-750C, SLC-850C & SLC-1000C

Unique Selling Points:

- GAMING/HIGH PERFORMANCE
- 80PLUS BRONZE
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- DC-2-DC technology
- Xtra long & flat uni-color (black) cables
- 14cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP

Model	24PI N	SAT A	Mole x	6PIN PCI e	8PIN PCIe (6+2)	8PIN 12V	8PIN EPS (4+4)	Flopp y
SLC-650C	1	6	3	х	4	х	1	1
SLC-750C	1	6	3	х	4	х	1	1
SLC-850C	1	9	3	х	6	1	1	1
SLC-1000C	1	9	3	х	6	1	1	1

A - 90 (PERFORMANCE) series



Models: GDP-550C, GDP-650C & GDP-750C

Unique Selling Points:

- GAMERS/ENTHUSIASTS
- 90% EFFICIENCY @230V (equivalent to 80PLUS GOLD)
- RETAIL (incl. Pwr cord + accessories)
- SEMI MODULAR
- 14cm (silent) Fan (+5V addressable)
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- Double forward design & DC to DC technology
- +12V Single Rail technology

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GDP-550C	1	6	3	х	х	2	1	1
GDP-650C	1	6	3	х	x	2	1	1
GDP-750C	1	8	3	х	x	4	1	1

PHOTON GOLD (RGB) series









Models: GDP-650C-RGB & GDP-750C-RGB Unique Selling Points:

- GAMERS/ENTHUSIASTS
- 90% EFFICIENCY @230V (equivalent to 80PLUS GOLD)
- RETAIL (incl. Pwr cord + accessories)
- SEMI MODULAR
- 14cm (**RGB**) (silent) Fan (+5V addressable)
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- Double forward design & DC to DC technology
- +12V Single Rail technology
- RGB: supports all renowned RGB lightening synchronization systems such as ASUS™ AURA SYNC, MSI™
 MYSTIC LIGHT SYNC, ASROCK™ POLYCHROME SYNC and GIGABYTE™ RGB FUSION.

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GDP-650C-RGB	1	6	3	x	x	4	1	1
GDP-750C-RGB	1	8	3	x	x	4	1	1

PHOTON (RGB) series









Models: CTG-650C-RGB & CTG-750C-RGB Unique Selling Points:

- GAMERS/ENTHUSIASTS
- 85% EFF@230V (equivalent to 80PLUS BRONZE)
- RETAIL (incl. Pwr cord + accessories)

- SEMI MODULAR
- 12cm (**RGB**) (silent) Fan (+5V addressable)
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- RETAIL
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- RGB: supports all renowned RGB lightening synchronization systems such as ASUS™ AURA SYNC, MSI™
 MYSTIC LIGHT SYNC, ASROCK™ POLYCHROME SYNC and GIGABYTE™ RGB FUSION.

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
CTG-650C-RGB	1	6	4	x	x	4	1	2
CTG-750C-RGB	1	6	4	х	х	4	1	2

RETAIL POWER SUPPLIES

REAL POWER
RETAIL & BULK
QUALITY COMPONENTS
MAXIMUM EFFICIENCIES
EYE CATCHING RETAIL PACKING
THERMAL BOARD TECHNOLOGY
+12V SINGLE RAIL TECHNOLOGY
+3.3V MAGNETIC AMPLIFICATION
LLC HALF BRIDGERESONANT DESIGN PCB
MAINSTREAM GAMING, HOME & OFFICE

VOLTA (RETAIL) series



Models: VPS-600S & VPS-700S*(New) <u>Unique Selling Points:</u>

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 80PLUS BRONZE
- DIRECT CABLES
- RETAIL & BULK (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- DIRECT CABLES (Xtra long MB & CPU cables 650mm)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Double forward design & DC to DC technology + Thermal board
- Security features: : UVP, OVP, SCP, OPP, OTP, AFC & SIP

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PC le	8PIN PCIe (6+ 2)	8PIN EPS (4 +4)	Flop py
TPS- 600S	1	5	3	x	x	2	1	х
TPS- 700S	1	6	3	x	x	2	1	х

TASK (RETAIL) series







Models: TPS-400S, TPS-500S, TPS-600S & TPS-700S <u>Unique Selling Points:</u>

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 80PLUS BRONZE
- DIRECT CABLES
- RETAIL & BULK (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- DIRECT CABLES (Xtra long MB & CPU cables 650mm)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Double forward design & DC to DC technology + Thermal board
- Security features: : UVP, OVP, SCP, OPP, OTP, AFC & SIP

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PC le	8PIN PCIe (6+ 2)	8PIN EPS (4 +4)	Flop py
TPS- 400S	1	5	3	x	x	1	1	x
TPS- 500S	1	5	3	x	х	1	1	x
TPS- 600S	1	5	3	x	х	2	1	х
TPS- 700S	1	6	3	х	x	2	1	х

ELEMENT (RETAIL) series



Models: ELP-350S, ELP-400S, ELP-500S, ELP-600S & ELP-700S <u>Unique Selling Points:</u>

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- DIRECT CABLES
- RETAIL & BULK (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC &SIP
- ELP-600S & ELP-700S with xtra long (650mm) 24PIN & EPS 12V cables

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2	8PIN EPS (4+4)	Flopp y
ELP-350S	1	3	2	х	х	х	1	1
ELP-400S	1	3	2	х	х	1	1	1
ELP-500S	1	3	2	х	х	1	1	1
ELP-600S	1	4	2	х	х	2	1	1
ELP-700S	1	6	2	х	х	2	1	1

A - 80 (RETAIL) series









Models: CTG-550C, CTG-650C & CTG-750C Unique Selling Points:

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- SEMI MODULAR
- RETAIL (incl. Pwr cord + accessories)
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
CTG-550C	1	6	4	х	х	2	1	2
CTG-650C	1	6	4	х	x	2	1	2
CTG-750C	1	6	4	х	x	2	1	2

ECO (RETAIL) series









Models: GPE-400S, GPE-500S, GPE-600S & GPE-700S Unique Selling Points:

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- DIRECT CABLES
- RETAIL (incl. Pwr cord + accessories)
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GPE-400S	1	4	2	х	х	х	1	х
GPE-500S	1	4	2	х	х	х	1	х
GPE-600S	1	6	2	х	х	2	1	х
GPE-700S	1	6	2	х	х	2	1	х

FORCE (RETAIL) series









Models: CPS-350S, CPS-400S, CPS-450S, CPS-550S, CPS-650S & CPS-750S <u>Unique Selling Points:</u>

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- DIRECT CABLES
- RETAIL (incl. Pwr cord + accessories)
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
CPS-350S	1	4	2	x	x	x	1	x
CPS-400S	1	4	2	х	x	х	1	х
CPS-450S	1	4	2	х	1	х	1	х
CPS-500S	1	4	2	х	x	2	1	х
CPS-550S	1	4	2	х	х	2	1	х
CPS-650S	1	6	2	х	x	2	1	х
CPS-750S	1	6	2	х	х	2	1	х

SMART (RETAIL) series









Models: GPS-400A8, GPS-500A8, GPS-550A8, GPS-600A8, GPS-650A8 & GPS-700A8 Unique Selling Points:

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFFICIENCY @230V (equivalent to 80PLUS BRONZE)
- DIRECT CABLES
- RETAIL (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- Double forward design with +3.3V magnetic amplification

- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GPS-400A8	1	3	2	х	х	1	1	1
GPS-500A8	1	3	2	х	x	1	1	1
GPS-550A8	1	4	2	х	x	2	1	1
GPS-600A8	1	4	2	х	x	2	1	1
GPS-650A8	1	4	2	х	x	2	1	1
GPS-700A8	1	6	2	x	х	2	1	1

OEM/BULK POWER SUPPLIES

REAL POWER
RETAIL & BULK
QUALITY COMPONENTS
MAXIMUM EFFICIENCIES
THERMAL BOARD TECHNOLOGY
+12V SINGLE RAIL TECHNOLOGY
+3.3V MAGNETIC AMPLIFICATION
LLC HALF BRIDGERESONANT DESIGN PCB
MAINSTREAM GAMING, HOME & OFFICE

SOLID (BULK/OEM) series



Models: GPP-400S, GPP-500S, GPP-600S & GPP-700S Unique Selling Points:

• MAIN STREAM HOME & OFFICE

- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- XTRA long CPU and MB cables (650mm)
- 400W 700W with 8PIN EPS (4+4)
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- · Thermal board

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCle (6+2)	8PIN EPS (4+4)	Flopp y
GPP-400S	1	5	3	1	x	1	х	х
GPP-500S	1	5	3	1	x	1	х	х
GPP-600S	1	5	3	1	х	2	х	х
GPP-700S	1	6	3	1	х	2	х	х

iARENA-II (BULK/OEM) series





Models: GPA-350S8, GPA-400S8, GPA-450S8 & GPA-500S8 Unique Selling Points:

- MAIN STREAM HOME & OFFICE
- 85% EFF @230V (equivalent to 80PLUS)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GPA-350S8	1	3	2	х	x	х	1	1
GPA-400S8	1	3	2	х	x	1	1	1
GPA-450S8	1	3	2	х	x	1	1	1
GPA-500S8	1	3	2	х	x	1	1	1

iARENA-IV (BULK/OEM) series









Models: GPB-350S, GPB-400S, GPB-450S & GPB-500S <u>Unique Selling Points:</u>

- MAIN STREAM HOME & OFFICE
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PINEPS (4+4)	Flopp y
GPB-350S	1	5	3	х	x	1	1	х
GPB-400S	1	5	3	х	x	1	1	х
GPB-450S	1	5	3	х	x	1	1	х
GPB-500S	1	5	3	х	х	1	1	х

VALUE (BULK/OEM) series



Models: APB-400B8 & APB-500B8 Unique Selling Points:

- MAIN STREAM HOME & OFFICE
- 80PLUS EU (WHITE)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- · Thermal board

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
APB-400B8	1	3	2	1	1	х	х	1
APB-500B8	1	3	2	1	1	х	х	1
APB-600B8	1	4	2	х	х	2	1	1
APB-700B8	1	4	2	х	х	2	1	1

iARENA-III (BULK/OEM) series







Models: GPC-400S, GPC-500S, GPC-600S, & GPC-700S Unique Selling Points:

- MAIN STREAM HOME & OFFICE
- 80% EFF @230V (equivalent to 80PLUS)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GPC-400S	1	4	2	х	x	х	1	х
GPC-500S	1	4	2	х	x	1	1	х
GPC-600S	1	6	2	х	х	2	1	х
GPC-700S	1	6	2	х	х	2	1	х

iARENA-I (BULK/OEM) series



Models: GPA-550S, GPA-600S, GPA-650S & GPA-700S Unique Selling Points:

- MAIN STREAM HOME & OFFICE
- <80% EFF @230V
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- · Thermal board

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
GPA-550S	1	4	2	х	х	2	1	1
GPA-600S	1	4	2	х	х	2	1	1
GPA-650S	1	6	2	х	х	2	1	1
GPA-700S	1	6	2	x	х	2	1	1

SFX POWER SUPPLIES

SFF (small form factor) solution
REAL Power
HIGH EFFICIENCIES
QUALITY CAPACITORS
RETAIL & BULK PACKING
DC – to – DC technology
+12V SINGLE RAIL Technology
THERMAL BOARD Technology
LLC HALF BRIDGE RESONANT DESIGN PCB
GMING, PERFORMANCE, HOME & OFFICE





SMART (SFX PERFORMANCE) series



Models: SFX-500GD-C Unique Selling Points:

- GAMING/HIGH PERFORMANCE
- 80PLUS GOLD (SFX-500DG-C)
- RETAIL (incl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- · Thermal board
- Dedicated to SFF (small form factor) cases
- ATX 2.3 version

Model	24PI N	SAT A	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
SFX-500GD-	1	4	2	x	x	2	1	X

SMART (SFX) series





Models: SFX-250VS, SFX-350BS & SFX-450BS Unique Selling Points:

- MAIN STREAM HOME & OFFICE
- 85% EFF @230V (SFX-XXXVS/BS)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- · Thermal board
- Dedicated to SFF (small form factor) cases
- ATX 2.3 version

Model	24PI N	SATA	Mole x	4PIN 12 V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Flopp y
SFX-250VS	1	2	2	X	x	x	1	1
SFX-350BS	1	2	2	x	x	x	1	1
SFX-450BS	1	4	2	x	x	1	1	1
SFX-500GD-C	1	4	2	х	x	2	1	х

SMART (BFX) series





Models: BFX-350BS & BFX-450BS <u>Unique Selling Points:</u>

- MAIN STREAM HOME & OFFICE
- 80PLUS BRONZE
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- DC to DC technologie
- Dedicated to SFF (small form factor) cases
- ATX 3 version

Model	24PI N	SAT A	Molex	4PIN 12V	6PIN PCI e	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
BFX- 350BS	1	3	2	x	x	1	1	1
BFX- 450BS	1	3	2	x	x	2	1	1

COMPACT (SFX PERFORMANCE) series



Models: CSN-450C, CSN-550C & CSN-650C Unique Selling Points:

- 80PLUS GOLD certified
- RETAIL (incl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- Active PFC (PF 0,9)
- · Thermal board
- Dedicated to SFF (small form factor) cases
- ATX 2.3 version

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
CSN-450 C	1	6	3	x	х	2	1	1
CSN-550 C	1	6	3	x	x	2	1	1
CSN-650 C	1	6	3	x	х	2	1	1

SMART (TFX) series



Models: GPF-300P, GPF-350P & GPF-400P Unique Selling Points:

- MAIN STREAM HOME & OFFICE
- 80PLUS BRONZE




- 85% EFF @230V → GPF-350P & GPF-400P
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan

- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Thermal board
- Dedicated to SFF (small form factor) cases
- ATX 3 version

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
GPF- 300P	1	4	2	x	x	х	1	1
GPF- 350P	1	4	2	x	x	x	1	1
GPF- 400P	1	4	2	x	х	x	1	1

PRODUCT REAEARCH & DEVELOPEMENT

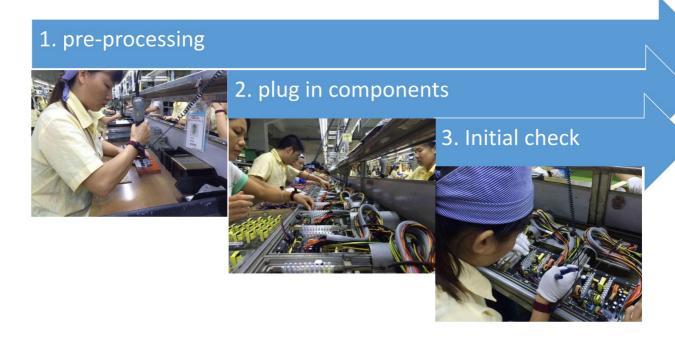

Product developement / R&D

4. wave-soldering process



5. check the soldering quality



6. in circuit test



10. Test after assembly



11. burn-in test



12. HI-POT test



13. function test



14. cable test



15. ATE test



16. appearance check




17. packaging



18. out-going quality control



QUALITY CONTROL

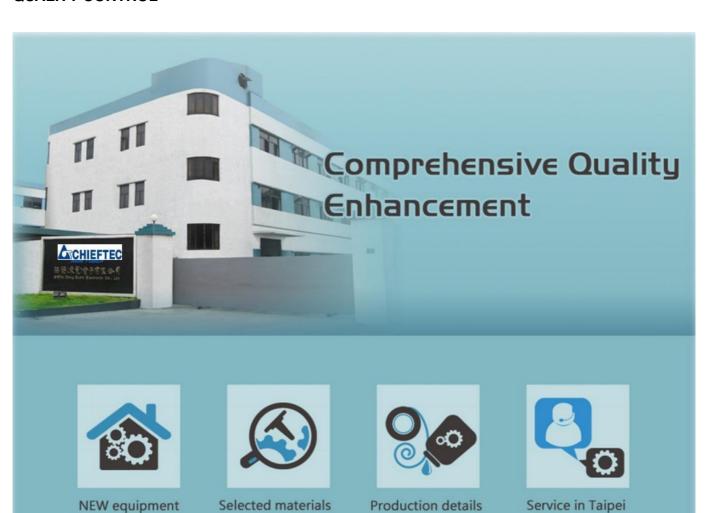




This powerful feature saves time and reduces significantly, human operations errors which in turn decreases failure rate due to improper tests.




Brand new soldering machine launched in 2014 to ensure clean soldering processes which increase longevity of components and related solutions



The new BURN-IN room which is used to stress-test PSUs until burning point to establisch max. values correctly.

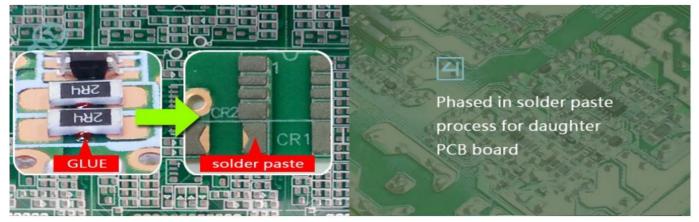

Brand new soldering paste processes for daughter mainboards to enhance cleaner and more dependent soldering points.

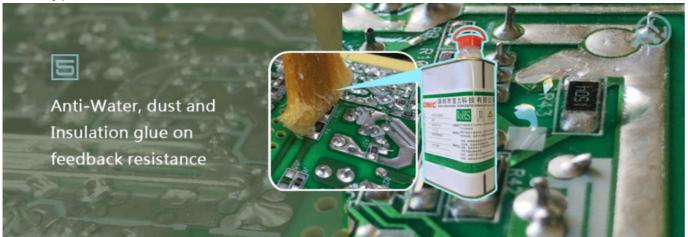

The glue is a relevant aspect of the PSU so that anti water, dust and insulation glue is now implemented to enhance functionality further.




The vibration test is run on every single unit at the end of the production line to further ensure all quality standards are met.



SMD capacitors have been replaced with TDKs to boost longevity and ensure additional MTBF.




Both soldering spray and solder bars have been upgraded to very renowned brand ALPHA which ensures highest quality soldering.

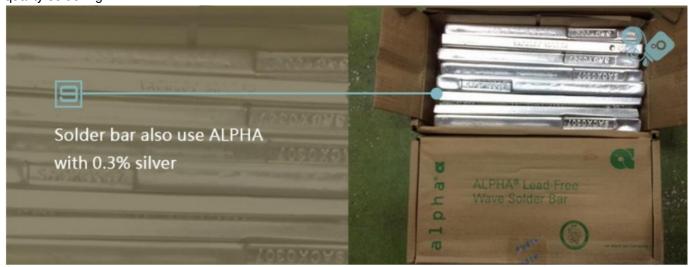

Solder bars with 0,3% silver to ensure long-term soldering results and lowest possible insulation.

CHIEFTEC 3CONTROL CENTER















CE CB 🕲 🗵 🍪 🥞









Documents / Resources



