


```
hide]
```

- ## 5.1 References



CISCO IOS XRd Virtual Routing IOS XR Documentation

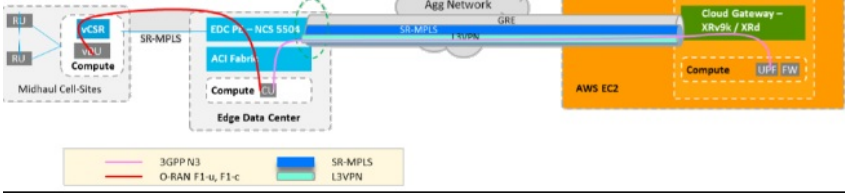

Specifications

- Product Name: Cisco IOS XRd
- Release Version: 25.1.2
- Supported Deployments: XRd vRouter, XRd Control Plane on AWS EKS
- Related Resources: Smart Licensing, Cisco XRd Documentation, Cisco IOS XR Error Messages, Cisco IOS XR MIBs

Product Usage Instructions

Supported Deployments:

This release supports XRd vRouter or XRd Control Plane on AWS EKS.

Related Resources:

Refer to the following resources for additional information:

- **Smart Licensing:** Information about Smart Licensing, Using Policy solutions and their deployment on IOS XR Routers.
- **Cisco XRd Documentation:** CCO documentation for Cisco IOS XRd.
- **Cisco IOS XR Error Messages:** Search by release number, error strings, or compare release numbers to view a detailed repository of error messages and descriptions.
- **Cisco IOS XR MIBs:** Select the MIB of your choice from a drop-down to explore an extensive repository of MIBs.

Document YANG Data Models:

A user-friendly reference designed to easily explore and understand the various data models supported in Cisco IOS XR platforms and releases.

XRd Tools:

A GitHub repository offering utilities to verify host resource sufficiency and assist in launching Cisco IOS XRd instances in a lab environment.

XR Docs Virtual Routing:

The XR Docs Virtual Routing tutorials offer instructions for deploying XRd in lab settings, along with information on other deployment environments that are not yet officially supported.

Recommended Release:

A general guide in case of upgrading IOS XR routers or new deployments that involve IOS XR routers.

Revised: May 22, 2025

Release Notes for Cisco IOS XRd, IOS XR Release

- XRd is a powerful IOS XR virtual platform that supports a wide variety of technology roles such as virtual route reflector (vRR), virtual cell-site router (vCSR), and virtual provider-edge (vPE). It is available in a containerised form factor, enabling both standalone and Kubernetes-based containerised network deployments.

Cisco IOS XRd Overview

XRd is the latest virtual platform from Cisco that brings the highly scalable, feature-rich, and reliable IOS-XR operating system to containerised network deployments. With XR control plane pedigree shared with the likes of Cisco 8000 and data plane capabilities that are derived from the powerful XRv9000, XRd brings the best of both worlds – enabling high-scale control plane use cases such as virtual route-reflector (vRR) and high-throughput requirements in virtual provider edge (vPE).

XRd is available in two formats:

- XRd Control Plane
- XRd vRouter

Cisco IOS XRd Licensing Model

- The Cisco IOS XRd platform offers two types of licensing schemes. This table lists details of Cisco IOS XRd Router's software licenses or entitlements, arranged according to licensing PIDs.
- The Cisco IOS XRd instances are pre-loaded with an evaluation license valid for 90 days. For licenses post the evaluation period, you can purchase the XRd licenses using Cisco Smart Licensing.

Table 1: Cisco IOS XRd Licensing PIDs

PIDs	Description
XRD-VR-CP	XRd Control Plane

What's New in Cisco IOS XR Release

Software Features Introduced

The following user scenarios are supported with this release:

User Scenarios	Deployment
vPE	• Standalone Docker • OpenShift-based K8S
vRR	• Standalone Docker • OpenShift-based K8S

User Scenarios	Deployment
vCSR	VMware Tanzu-based K8S
Simulation	• Manual Testing • Automation • CI/CD Workflows

- Cisco is continuously enhancing the product with every release, and this section lists key features. It also includes links to detailed documentation, where available.
- Cisco IOS XRd supports the majority of the Cisco IOS XR technologies. The following sections detail the feature set per user scenarios:

vPE

Feature	See the Following Documentation
L3VPN	L3VPN Configuration Guide for Cisco 8000 Series Routers
HSRP	Implement HSRP

VRRP	Implement VRRP
LDP	Implementing MPLS Label Distribution Protocol
RSVP	Implementing RSVP for MPLS-TE
MPLS TE	Implementing MPLS Traffic Engineering
MPLS OAM	Implementing MPLS OAM
MPLS SR	Segment Routing Configuration Guide for Cisco 8000 Series Routers

vCSR

Feature	See the Following Documentation
L3VPN	L3VPN Configuration Guide for Cisco 8000 Series Routers
HSRP	Implement HSRP
VRRP	Implement VRRP
LDP	Implementing MPLS Label Distribution Protocol
RSVP	Implementing RSVP for MPLS-TE
MPLS TE	Implementing MPLS Traffic Engineering
MPLS OAM	Implementing MPLS OAM
MPLS SR	Segment Routing Configuration Guide for Cisco 8000 Series Routers
EVPN-VPWS	EVPN Virtual Private Wire Service (VPWS)

vRR

- ORR for IPv6 Unicast AF for the single ISIS topology case

XRd: Generic features

Feature	See the Following Documentation
SSH	Implementing Secure Shell
NETCONF	Use NETCONF Protocol to Define Network Operations with Data Models
gNMI	Use gRPC Protocol to Define Network Operations with Data Models
Telemetry	Telemetry Configuration Guide for Cisco 8000 Series Routers
Syslog	Implementing System Logging
SNMP	Configuring Simple Network Management Protocol
• AAA • TACACS+	Configuring AAA Services
Flex-CLI	Configuring Flexible Command Line Interface
ZTP	Upgrade the Current Active Version of Cisco IOS XR Software
ACLs	Implementing Access Lists
Call Home	Configuring Call Home
Smart Licensing	Configuring Smart Licensing
BGP	BGP Configuration Guide for Cisco 8000 Series Routers
RPL	Implementing Routing Policy
IS-IS	Implementing IS-IS
OSPF	Implementing OSPF

PCE	Configure Segment Routing Path Computation Element
BMP	Overview of BGP Monitoring Protocol

Host Requirements

This section details the host requirements for XRd Control Plane :

Table 2: XRd Control Plane

Parameter	Requirement
XRd Control Plane Host	

Parameter	Requirement
CPU	x86-64 CPU with at least 2 cores
RAM	4 GB
Linux kernel	Version 4 and above Note The Linux kernel must install the <i>dummy</i> and <i>nf_tables</i> modules.
Linux cgroups	Version 1 Note Support for unified hierarchy cgroups is not available.
XRd Control Plane instance on the host	
CPU	1 core minimum

RAM	2 GB minimum
Inotify user instances and watches	4000
XRd Control Plane on AWS EC2 instance	
Instance Type	m5.2xlarge
Number of threads per processor core	1
Minimum Disk Size	8 GB Note An XRd instance requires a minimum disk size of 8 GB, but there may be demand for additional disk space depending on how the node handles core files.
Operating System	Amazon Linux 2 with EKS Optimisations
Kernel Settings	4000 inotify user instances and watches per XRd instance

Note

For using Docker to run the containers, you need Docker version 18 or above with permission to run Docker containers.

Note

Cisco IOS XRd is not supported for production networks on Linux, including Ubuntu or any other distribution. Carefully consider this restriction when planning deployments to avoid potential issues.

Full Cisco Trademarks with Software License

- THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS,

INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

- THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE OUTLINED IN THE INFORMATION PACKET THAT WAS SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.
- The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.
- NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.
- IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.
- Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.
- All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.
- Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

- Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

Americas

Headquarters Cisco Systems, Inc. San Jose, CA 95134-1706 USA

Asia Pacific

Headquarters Cisco Systems (USA)Pte.Ltd. Singapore

Europe

Headquarters Cisco Systems International BV Amsterdam, The Netherlands

- Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

FAQs

Are there any new software features introduced in Release 25.1.2?

No, there are no new software features introduced in this release.


Are there any known issues in Release 25.1.2?

No, there are no known issues in this release.

What are the supported deployments for Cisco IOS XRd, Release 25.1.2?

The supported deployments include XRd vRouter or XRd Control Plane on AWS EKS.

Documents / Resources

	CISCO IOS XRd Virtual Routing IOS XR Documentation [pdf] User Manual IOS XRd Virtual Routing Documentation, IOS XRd, Virtual Routing Documentation, Documentation, Documentation
---	---

References

- [User Manual](#)

📁 Cisco, Documentation, IOS XRd, IOS XRd Virtual Routing Documentation, Virtual Routing

📁 Cisco Documentation



Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

[Post Comment](#)

Search:

[Search](#)

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.