

# **CLI-MATE CLI-AH100 Ultrasonic Humidification System Instruction Manual**

Home » CLI MATE » CLI-MATE CLI-AH100 Ultrasonic Humidification System Instruction Manual



## **Contents**

- 1 CLI-MATE CLI-AH100 Ultrasonic Humidification
- **System**
- **2 Product Information**
- **3 Product Usage Instructions**
- 4 FAQ
- **5 SAFETY PRECAUTIONS**
- **6 PARTS IDENTIFICATION**
- **7 OPERATION INSTRUCTIONS**
- **8 CLEANING AND MAINTENANCE**
- 9 TROUBLESHOOTING
- **10 WARRANTY**
- 11 CONTACT
- 12 Documents / Resources
  - 12.1 References



**CLI-MATE CLI-AH100 Ultrasonic Humidification System** 



## **Product Information**

# **Specifications**

• Manufacturer: [Manufacturer Name]

• Model: [Product Model]

• **Dimensions:** [Product Dimensions]

• Weight: [Product Weight]

• Power Source: [Power Source Type]

• Colour: [Product Color]

# **Product Usage Instructions**

# Step 1: Unboxing and Setup

- 1. Remove the product from its packaging.
- 2. Check for any visible damage or missing parts. If there are any issues, contact customer support.
- 3. Read the user manual and familiarize yourself with the product.
- 4. Connect the necessary cables and power source as instructed in the manual.
- 5. Turn on the product and wait for it to initialize.

# **Step 2: Basic Operation**

To perform basic operations with the [Product Name], follow these steps:

- 1. [Basic operation step 1]
- 2. [Basic operation step 2]
- 3. [Basic operation step 3]

## **Step 3: Advanced Features**

If your [Product Name] has advanced features, here are instructions on how to use them:

- 1. [Advanced feature step 1]
- 2. [Advanced feature step 2]
- 3. [Advanced feature step 3]

## **FAQ**

- Q: Can I use the [Product Name] with other devices?
- A: Yes, the [Product Name] is compatible with a wide range of devices. Please refer to the user manual for specific compatibility information.
- Q: How do I clean the [Product Name]?
- A: To clean the [Product Name], follow these steps:

The Cli~Mate Ultrasonic Humidification System effectively humidifies the air in indoor areas, for a more comfortable and healthy environment.

**Note:** Please read through the instructions carefully before using or installing the product and ensure that the manual is kept in a safe place for future reference.

The system must be properly installed and located under the installation instructions before it is used. During the set-up of this product if you have any questions/comments/issues DO NOT RETURN TO STORE. FOR SERVICE AND TECHNICAL ADVICE ON THIS PRODUCT, CALL 1300 764 325.

Register your warranty online at www.cli-mate.com.au/warranty-and-registration.

## **SAFETY PRECAUTIONS**

## Read all instructions carefully.


- All components need to be installed by the user manual instructions for the correct performance of the unit.
- This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure they do not play with the product.
- Do not operate the unit with a damaged cord or plug or after the unit malfunctions or has been damaged in any manner.
- Do not operate the unit outdoors. This unit is intended for indoor use only.
- To protect against the risk of electric shock and personal injury, do not immerse cords, plugs or products in water or other liquids.
- Operate the unit on a stable level flat waterproof surface, at least 15cm away from the wall and other appliances.

- Do not place in direct sunlight, high-temperature areas or near sensitive electronic equipment.
- Use only clean, cool tap water to fill the water tank. Do not use hot water. Filtered or distilled water is recommended to avoid scale build-up if tap water is too hard.
- Do not move or shake the device during operation or when the power is on.
- Do not remove any parts of the device during operation.
- Do not move or incline the device to prevent overflow of water during operation.
- Do not touch the transducer piece which is highly sensitive with bare fingers, or scrap it with metal tools, otherwise it will reduce mist output.
- Excessive humidity in a room can cause water condensation on windows and some furniture. If this occurs, turn the unit OFF.
- When moving the device, hold the bottom of the device with both hands.
- Do not operate the unit without water inside the water tank.
- Switch the unit off and unplug it from the wall outlet when not in use and before cleaning.
- Dispose of any unused liquid after each use.
- Do not pour water directly into the mist openings. Refer to Operation Instructions for instructions on how to fill the water tank.
- Unauthorised disassembling of the product will void the warranty.

|                     | Ultrasonic Humidification System |
|---------------------|----------------------------------|
| Model Code          | CLI-AH1OO                        |
| Power Supply        | 10O-24OV 5O/6OHz                 |
| Power Consumption   | 2OW                              |
| Water tank capacity | 1 .3 Litres                      |
| Standard Output     | 15Oml/h                          |

## PARTS IDENTIFICATION


- · a. Mist Outlet Cover
- b. Water Tank
- · c. Water Tank Cover
- d. Power Button
- e. Base

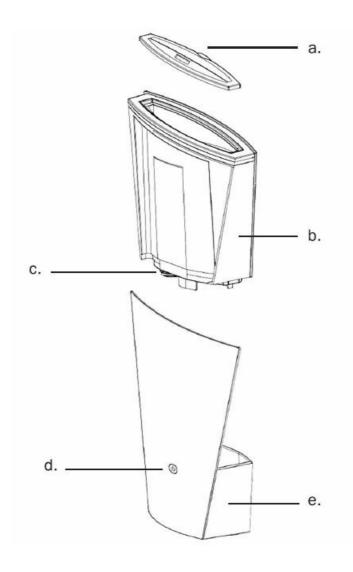

#### **OPERATION INSTRUCTIONS**

Before operation: Place the unit in the area to be used in for half an hour before turning it on. It is recommended to use the unit under a temperature of 20°C, with relative humidity of less than 80% RH.

- 1. Locate a flat stable location and plug the power cord into the appropriate electrical outlet.
- 2. Remove the water tank from the base by lifting and pulling upwards then turn the water tank upside down.
- 3. Unscrew the water tank cover (Figure 1) and fill the water tank with clean water. Important: Use only clean, cool tap water to fill the water tank. Do not use hot water. Filtered or distilled water is recommended to avoid scale build-up if tap water is too hard.
- 4. Replace the water tank cover and position the water tank back onto the base.
- 5. Switch on the unit by pressing the power button . The unit will begin to work on the default setting (Mist level 1-normal).
- 6. To select MIST LEVEL: Press the power button again to change the mist level from level 1 (normal) to level 2 (high).
  - Press the power button again to turn off the unit.
- 7. When the water level in the water tank is low, the unit will sound an alarm for 3 seconds and then automatically stop operation.
  - The power button will illuminate red. Follow steps 2-5 to continue.

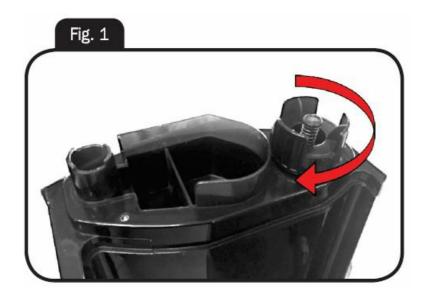

## **CLEANING AND MAINTENANCE**

**CAUTION:** Before carrying out cleaning or maintenance of the product, always turn off and unplug the cord from the power socket.

- Do not rinse the unit or immerse the unit in water.
- Do not use detergent, soap, boiling water or abrasive cleaners to clean any parts of the unit. These will interfere with the proper operation of the unit.
- Clean the surface of the device with a soft cloth.

#### Scale

To reduce the possibility of scale (white mineral deposits) build-up on the surface of the water basins, the inner surface of the water tank and the transducer, the following is recommended:

- · Change the water daily.
- Use distilled, filtered or demineralised water.
- Drain, clean and thoroughly dry all parts of the unit before putting it into storage.


#### Cleaning the transducer

**Important:** Do not spill water over the base of the unit when rinsing the transducer with clean water. Be careful not to damage the Transducer during cleaning. Do not use any brushes, or sharp or metal objects to scrape it or touch it with bare fingers.

If mineral deposits are evident on or around the transducer (See Figure 2), clean the surface with a soft, clean cloth and a small amount of undiluted white vinegar. To remove mineral deposits, put 5-10 drops of undiluted white vinegar on the surface of the transducer. Leave to soak for 2-5 minutes. Use a cotton swab to gently loosen up the scale of the surface. Rinse the transducer with clean water and wipe clean.

#### Storage

If you do not plan to use the unit for an extended time empty the water tank and base completely. Do not store with water inside the base or water tank Allow all components to dry completely before storing. Store in a cool dry location.

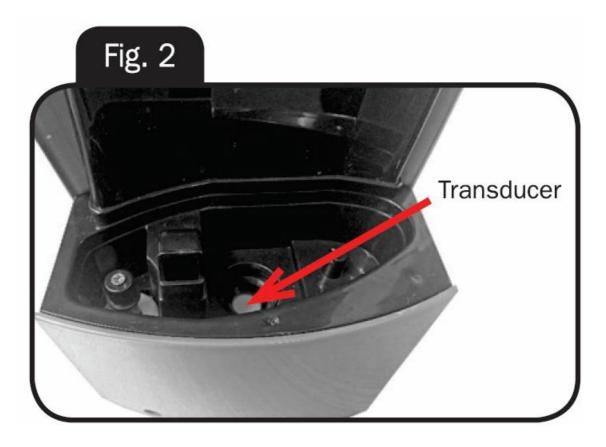

## **TROUBLESHOOTING**

BEFORE YOU CALL FOR SERVICE PLEASE REVIEW THE TROUBLESHOOTING TIPS FIRST.

| Problem                       | Possible Causes                                     | What To Do   |
|-------------------------------|---|--|
| No Power                      | Unit is not plugged into wall socket                | Check connection to wall socket                    |
| Little or no mist is produced | No water in water tank                              | Fill water tank                                    |
|                               | Scale build up on transducer                        | Clean scale build up as per instructions           |
|                               | Water is too dirty or kept for too long in the tank | Clean water tank and refill with fresh clean water |
| Abnormal noise                | Very low water levels in water tank                 | Refill water tank                                  |
|                               | Unit is on unstable surface                         | Reposition the unit to a stable flat surface       |
| White dust accumulation       | Hard water used                                     | Follow instructions on page 4.                     |

## **WARRANTY**

Your Aquaport Australian 12-Month Repair or Replacement Warranty Aquaport warrants this appliance to the first purchaser and is subject to the stated conditions:

The warranty covers any defects in material or workmanship in the manufactured product within the first twelve months from the date of purchase.

To make a warranty claim you must call Aquaport on toll free number 1300 764 325 for instructions. If a product is found to be faulty there is a 90-day return policy from the date of purchase.

For warranty claims outside of 90 days from the date of purchase, the product will be repaired or replaced at our discretion. Repair or replacement costs of the product will be covered under warranty by Aquaport.

Goods presented for repair may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods.

The warranty does not cover consumable filters unless proven to have defects in material or workmanship in the manufactured product.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and

the failure does not amount to a major failure.

# **Conditions Of This Warranty**

- 1. This product has been fully installed under the user manual installation instructions.
- 2. The warranty extends only to repairing or replacing any component that proves to be defective in material or workmanship.
- 3. The warranty does not cover defects occasioned by misuse, alterations, accidents, or use for other than the intended purpose.
- 4. The warranty does not cover damage to the product caused by accidents, fires, floods, power surges or blackouts.
- 5. Proof of purchase is required for warranty claims.

## Please keep the purchase receipt in a safe place.

- To enable us to register your warranty and provide service should a problem occur, we recommend you register your warranty online at:
- www.cli-mate.com.au/warranty-and-registration
- · Aquaport Corporation Pty Ltd
- 70 Hardys Road, Torrensville
- South Australia 5031
- Customer Care 1300 764 325
- New Zealand Customers
- Telephone: 0800 210 190
- Email: info@aquaport.co.nz.

# **CONTACT**

### **CUSTOMER HOTLINE: 1300 764 325**

- Aquaport Corporation Pty Ltd
- 70 Hardys Road, Torrensville SA 5031
- Telephone: 08 8354 0711
- Facsimile: 08 8354 0722
- Email: aquaport@aquaport.com.au.
- New Zealand Customers
- Telephone: 0800 210 190
- Email: info@aquaport.co.nz.
- Web: www.cli-mate.com.au.
- Social: 
  ■ /climate brand ■@climatebrand

# **Documents / Resources**



<u>CLI-MATE CLI-AH100 Ultrasonic Humidification System</u> [pdf] Instruction Manual CLI-AH100 Ultrasonic Humidification System, CLI-AH100, Ultrasonic Humidification System, Humidification System

# References

- ® Manual-Hub.com Free PDF manuals!
- User Manual

#### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.