Club 3D CSV-1478 USB Type-C Adapter



Club 3D CSV-1478 USB Type-C Adapter Installation Guide

Home » Club-3D » Club 3D CSV-1478 USB Type-C Adapter Installation Guide 🖺



Contents

- 1 Club 3D CSV-1478 USB Type-C **Adapter**
- **2 Product Specifications**
- **3 Product Usage Instructions**
- **4 Frequently Asked Questions**
- **5 Features**
- 6 Available interfaces
- **7 Supported Resolutions**
- 8 Documents / Resources
 - 8.1 References



Club 3D CSV-1478 USB Type-C Adapter



Product Specifications

Model: CSV-1478

- Product Type: USB Type-C to dual DisplayPort Video Splitter
- Supported Resolutions: Single 4K60Hz or dual 4K60Hz
- · Interfaces:
 - Input: 1x USB Type-C Male/USB Type-A Male
 - Output: 2x DisplayPort Female
- · Dimensions:
 - Input Adapter: 6.2 cm x 3.1 cm x 2.5 cm
 - Output Ports: 1.4 cm x 9 cm x 18 cm
- Data Transmission: USB 3.0 with max 5Gbps, backward compatible with USB 2.0

Product Usage Instructions

- 1. Ensure all items are included and check for damages upon unpacking.
- 2. Connect your DisplayPort displays to the CSV-1478.
- 3. Choose the correct cables if needed (contact www.club-3d.com for assistance).
- 4. Connect the CSV-1478 to the host via either USB Type-A or Type-C connector.
- 5. Download the necessary driver from the Club 3D website before usage.
- 6. You're ready to use the product.

Frequently Asked Questions

Q: What is the maximum resolution supported by the CSV-1478?

A: The product supports single 4K60Hz or dual 4K60Hz resolutions depending on the connected devices.

Q: Can I use the CSV-1478 at high altitudes?

A: The product is only recommended for use at altitudes below 2000 meters/6562 feet for safe usage.

Q: How many output ports does the CSV-1478 have?

A: The CSV-1478 has two DisplayPort Female output ports.

Q: How do I connect the CSV-1478 to my computer?

A: You can connect the CSV-1478 to your computer via either a USB Type-A or USB Type-C connector.

Thank you for purchasing our CSV-1478 Product. After unpacking the product, please make sure you have all the items provided and checked for any damages.

In case of any missing/damaged parts please inform your supplier immediately.

You should have:

CSV-1478 USB Type-C (with USB Type-A adapter) to dual DisplayPort™ (4K60Hz) Video Splitter

The Club 3D CSV-1478 USB Type-C (with USB Type-A adapter) to dual DisplayPort™ (4K60Hz) Video Splitter with DisplayLink® which provides most advanced, efficient solution. It supports max single 4K60Hz or dual 4K60Hz simultaneous output of different videos. It can work on USB Mode and DP™ Alt mode supported USB Type-C and

USB Type-A hosts.

In this document you can find:

Features
How does it work
Available Interfaces Supported Resolutions

Features

- Support DisplayLink®
- Support DisplayPort™ max. 4K60Hz per port
- Support to output dual 4K60Hz simultaneously with different pictures on both USB Type-C and USB Type-A host
- Support outputting different pictures on both Windows and Apple including M1 and M2 silicon

How does it work?


- 1. Connect your DisplayPort displays to the CSV-1478 (in case you need assistance in choosing the correct cables, feel free to contact www.club-3d.com)
- 2. Connect to the host via either USB Type-A or type-C connector
- 3. You're ready to go

DisplayLink® Driver Installation Procedure

Please install the latest DisplayLink® USB Graphics Driver on your computer before using this product, or video ports will have no output. You can download this driver from the Club 3D website under Downloads for this product

Input:

USB Type-A to -C Adapter Male (Connect to host)

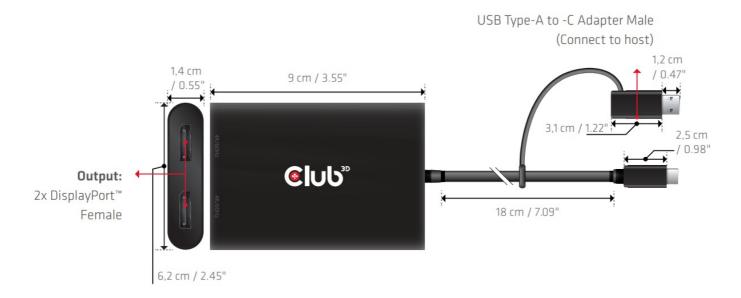

Available interfaces

Input/Output Connector

Input 1x USB Type-C Male/USB Type-A Male
Output 2x DisplayPort™ Female

USB Type-C Male/USB Type-A Male

(Connect to host) Support USB3.0 with max 5Gbps data transmission, downwards compatible with USB2.0

Available interfaces DisplayPort™

- Support max 4K60Hz per port
- Support 8/10bit color depth output
- Support output pixel format RGB
- Support DP++
- Support output max single 4K60Hz or dual 4K60Hz simultaneously with different pictures (Extended Desktop)
 under Windows system and MacBook system

Note: The max resolution is determined by the connected devices

Supported Resolutions

Windows or macOS System (USB Type-C or USB Type-A Host)		
	DP1 (USB Mode)	DP2 (USB Mode)
Single Port Connected	4K60Hz	NC
	NC	4K60Hz
Dual Port Connected (Duplicate Desktop)	4K60Hz	4K60Hz
Dual Ports Connected (Extended Desktop)	4K60Hz	4K60Hz

Warning Safe Usage: Only to be used at altitude 2000 meters/6562 feet and below.

Disclaimer: While we endeavour to provide the most accurate, up-to-date information available, the content on this document may be out of date or include omissions, inaccuracies or other errors. Products might obtain a certification during their lifetime. This doesn't change or alter the product specifications and/or performance in any way. Club 3D will provide the updated information on their website www. Club-3d.com at her discretion. Therefore Club 3D does not accept any rights claimed on the content of this document. Please refer to a full overview of our Legacy Terms and Conditions on www.club-3d.com. All other brand names are trademarks or registered trademarks and are the property of their respective owners. All content is subject to change without prior notice.

Copyright © 2024 Club 3D B.V. www.club-3d.com



Documents / Resources



<u>Club 3D CSV-1478 USB Type-C Adapter</u> [pdf] Installation Guide CSV-1478, CSV-1478 USB Type-C Adapter, USB Type-C Adapter, Type-C Adapter, Adapter

References

- **O** Club 3D
- **O** Club 3D
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.