

Club 3D CSV-1595 USB Type C 7-in-1 Hub Installation Guide

Home » Club-3D » Club 3D CSV-1595 USB Type C 7-in-1 Hub Installation Guide

Contents

- 1 Club 3D CSV-1595 USB Type C 7-in-1
- Hub
- **2 Product Information**
- **3 Product Usage Instructions**
- 4 Features
- 5 Documents / Resources
 - **5.1 References**



Club 3D CSV-1595 USB Type C 7-in-1 Hub



Product Information

The Club 3D CSV-1595 is a USB Gen1 Type-C 7-in-1 hub that provides a very advanced and efficient solution to extend a single USB Gen1 Type-C port to multiple ports. It features 2x HDMITM ports, 2x USB Gen1 Type-A ports, 1x RJ45 port, 1x 3.5mm Audio port, and 1x USB Gen1 Type-C 100W Female port.

- 2x HDMITM ports: Supports max. 4K@30Hz and max. 4K@60Hz (driver installation needed for MacOSX*)
- 2x USB Gen1 Type-A ports: Supports USB3.0A with a data transfer rate of 5Gbps and BC1.2 charging
- 1x RJ45 port: Supports Ethernet connection up to 1000MB/s
- 1x 3.5mm Audio port: Supports audio output/input
- 1x USB Gen1 Type-C 100W Female port: Supports USB3.0A with a data transfer rate of 5Gbps and PD3.0 charging up to 100W Please note that driver installation is required for MacOSX* users. The driver can be downloaded from the CSV-1595 product page on the Club-3D website. The CSV-1595 hub also features a blue LED indicator and comes inan aluminum housing for durability.

System Requirements: Please check the complete product information about system requirements for Windows/Mac on the Club-3D website.

Product Usage Instructions


- 1. Unpack the CSV-1595 product and ensure that all items are included and undamaged. If any parts are missing or damaged, inform your supplier immediately.
- 2. Install the driver for MacOSX* users by downloading it from the CSV-1595 product page on the Club-3D website.
- 3. Before using the hub, confirm that your monitor's resolution meets the resolution requirements.
- 4. Connect the CSV-1595 hub to your Type-C host PC using the USB Gen1 Type-C port.
- 5. Connect your devices to the available interfaces on the hub:
 - For HDMI output, use the HDMITM ports. Depending on your requirements, choose either max. 4K@30Hz or max. 4K@60Hz resolution.
 - For USB devices, use the USB Gen1 Type-A ports. They support USB3.0A with a data transfer rate of 5Gbps and BC1.2 charging.
 - For Ethernet connection, use the RJ45 port. It supports speeds up to 1000MB/s.
 - For audio output/input, use the 3.5mm Audio port.
 - For charging or data transfer, use the USB Gen1 Type-C 100W Female port. It supports USB3.0A with a
 data transfer rate of 5Gbps and PD3.0 charging up to 100W.
- 6. If you want to connect multiple displays, ensure that your host supports DPTM1.4 Alt mode.
- 7. Once everything is connected, the blue LED indicator on the hub will show that it is powered on.

Thank you for purchasing our CSV-1595 Product. After unpacking the product, please make sure you have all the items provided and checked for any damages. In case of any missing/damaged parts please inform your supplier immediately.

You should have:

- CSV-1595
- · QIG, Quick Installation Guide

Make sure to install the driver* from our website CSV-1595 product page at www.club-3d.com Please confirm the monitor's resolution meets resolution requirements before use.

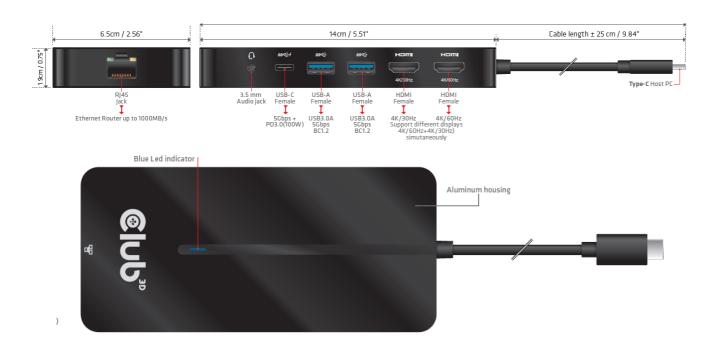

* Check the complete product information about System requirements (Windows/Mac)

The Club 3D CSV-1595 USB Gen1 Type-C 7-in-1 hub with with 2x HDMI™, 2x USB Gen1 Type-A, 1x RJ45, 1x 3.5mm Audio, 1x USB Gen1 Type-C 100W Female port, provides a very advanced, efficient solution to extend a single USB Gen1 Type-C port to multiple ports. Supports HDMI™ max. 4K@30Hz and HDMI max. 4K@60Hz driver installation needed for MacOSX*

Available Interfaces: Input

• USB Gen1 Type-C Male (Connect to host)

Output

- 2x HDMI™ Female
- 2x USB Gen1 Type-A Female
- 1x RJ45
- 1x 3.5mm jack Audio
- 1x USB Gen1 Type-C Female

NOTE:Please make sure your host supports DP[™]1.4 Alt mode.

• For Mac OSX users pleasedownload driver from the CSV-1595 product page at our website.

Features

- Support DP™1.4 Alt mode
- Support HDMI™ max 4K@60Hz from the USB Type-C Display Alternate Mode function
- Support HDMI[™] max 4K@30Hz from the integrated chipset in the dock make sure to install the driver from our website at www. club-3d.com
- Support HDCP1.4, HDCP 2.2 (on the HDMI with AltMode Function only)
- Support dual displays for Mac M1 / M2 users.
- Max 5Gbps data transmission per USB Gen1 Type-A port
- Support max 7.5W(5V/1.5A) downstream charging, 2 USB Gen1 Type-A BC 1.2
- Support Gigabit Ethernet 10M/100M/1000M, RJ45
- Support Audio output
- Support 1x USB Type C Female PD3.0 with max 100W PD charging and Gen1 5Gbps of data transfer

Disclaimer:

While we endeavor to provide the most accurate, up-to-date information available, the content on this document may be out of date or include omissions, inaccuracies or other errors. Therefore Club 3D does not accept any rights claimed on the content of this document. Please refer to a full overview of our Legacy Terms and Conditions on www.club-3d.com. All other brand names are trademarks or registered trademarks and are the property of their respective owners. All content is subject to change without prior notice.

Copyright © 2022, Club 3D B.V. www.club-3d.com

Documents / Resources



Club 3D CSV-1595 USB Type C 7-in-1 Hub [pdf] Installation Guide CSV-1595 USB Type C 7-in-1 Hub, CSV-1595, USB Type C 7-in-1 Hub, Type C 7-in-1 Hub, 7-in-1 Hub, Hub

References

- **O** Club 3D

Manuals+.