



Club 3D CSV-1598 USB Gen2 Type-C to Dual DisplayPort Portable Dock Installation Guide

[Home](#) » [Club-3D](#) » Club 3D CSV-1598 USB Gen2 Type-C to Dual DisplayPort Portable Dock Installation Guide 



Contents

- [1 CSV-1598 USB Gen2 Type-C to Dual DisplayPort Portable Dock](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)

CSV-1598 USB Gen2 Type-C to Dual DisplayPort Portable Dock

Thank you for purchasing our CSV-1598 Product.

After unpacking the product, please make sure you have all the items provided and checked for any damages. In case of any missing/damaged parts please inform your supplier immediately.

You should have:

- CSV-1598
- QIG, Quick Installation Guide (download)




<https://www.club-3d.com/en/detail/2611/>

! Make sure to install the driver* from our website CSV-1598 product page at www.club-3d.com
Please confirm the monitor's resolution meets resolution requirements before use.

The Club 3D CSV-1598 is a 7-in-1 USB Gen2 Type-C to Dual Display Portable Dock with DP™1.4 Alt mode which provides most advanced, efficient solution to extend a single USB Type-C port to be multiple ports. It integrates video, data and power ports that allows to connect 2 DisplayPort™ 4k60Hz displays simultaneously for enjoying videos on big screen, connect multiple USB devices for data transmission, connect Ethernet source for getting PC to super high speed network.

Besides, it has PD charging port which supports max 100W PD charging to support the function of the adapter and charge for the host simultaneously. It can work on all DP™ Alt mode supported USB Type-C host.

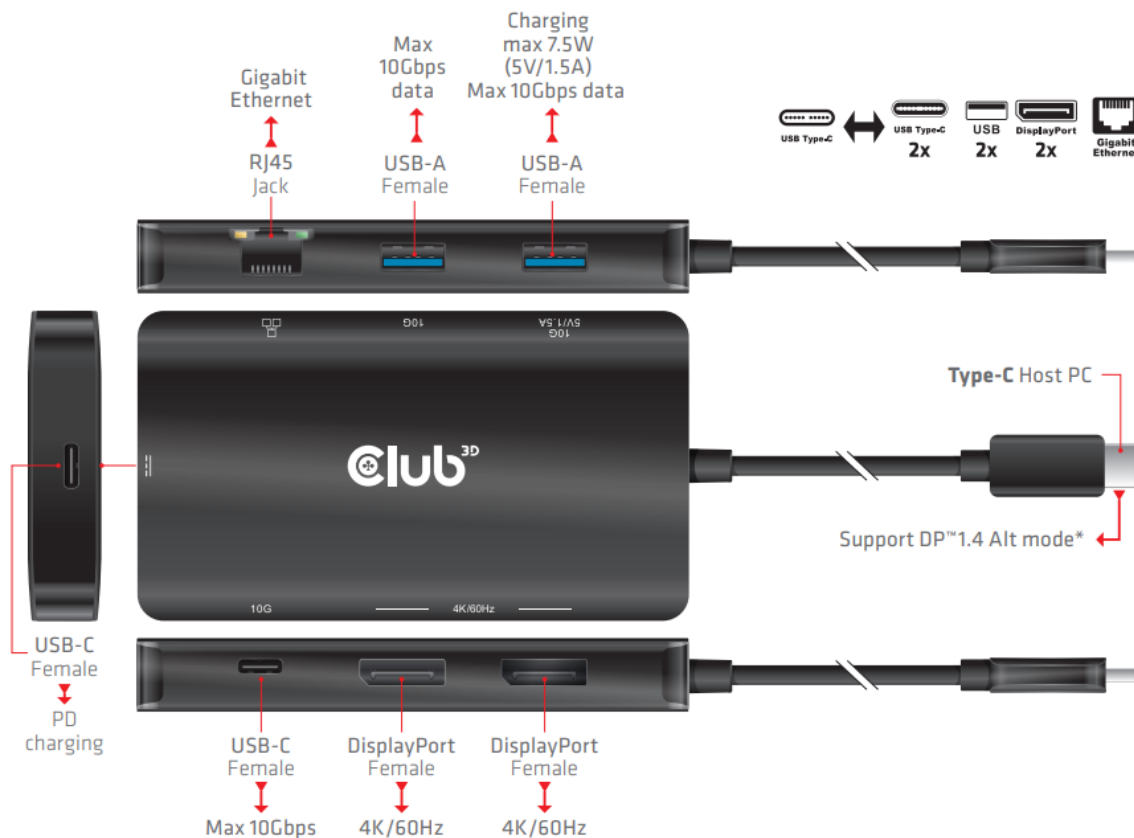

Available Interfaces:

Input:

- USB Gen2 Type-C Male
(Connect to host)

Output:

- 2x DisplayPort™ Female
- 2x USB Gen2 Type-A Female
- 1x RJ45 jack
- 2x USB Gen2 Type-C Female

NOTE:

Please make sure your host supports DP™1.4 Alt mode.

* For Mac OSX users please download driver from the CSV-1598 product page at our website.

Features:

- Support DP™1.4 Alt mode
- Support DP™ max. 4K60Hz per port
- Support dual output 4K60Hz simultaneously under MST mode
- Support 8/10/12 bit color depth output
- Support output pixel format RGB/YCbCr4:4:4/ YCbCr4:2:2/YCbCr4:2:0
- Support HDR
- Support HDCP 2.2 & 1.4

- Max 10Gbps (Gen2) data transmission per USB port
- Support max 7.5W(5V/1.5A) downstream charging for the USB Type-A port furthest from RJ45
- Support Gigabit Ethernet, 10M/100M/1000M
- Support max 100W PD charging (15W is dedicated to the functioning of this product, the rest power (max 85W) will be passed to charge the host)
- Support PD3.0 Fast Role Swap, the connected device will not get disconnected while plugging in and out PD Adapter



<https://www.club-3d.com/en/detail/2611/>

w e c o n n e c t


Disclaimer:

While we endeavor to provide the most accurate, up-to-date information available, the content on this document may be out of date or include omissions, inaccuracies or other errors. Therefore Club 3D does not accept any rights claimed on the content of this document. Please refer to a full overview of our Legacy Terms and Conditions on www.club-3d.com. All other brand names are trademarks or registered trademarks and are the property of their respective owners. All content is subject to change without prior notice.

CSV-1598 QIG July-2022

Copyright © 2022, Club 3D B.V. www.club-3d.com

Documents / Resources

	<p>Club 3D CSV-1598 USB Gen2 Type-C to Dual DisplayPort Portable Dock [pdf] Installation Guide</p> <p>CSV-1598 USB Gen2 Type-C to Dual DisplayPort Portable Dock, CSV-1598, USB Gen2 Type-C to Dual DisplayPort Portable Dock</p>
---	---

References

-  [Club 3D](https://www.club-3d.com)

