



**Manuals.plus /**

› **imuto /**

› imuto 100W 26800mAh Portable Power Bank User Manual

**imuto X6G**

# **imuto 100W 26800mAh Portable Power Bank User Manual**

**MODEL: X6G**



Image: The imuto 100W 26800mAh Portable Power Bank, shown with its included USB-C to USB-C cable. The power bank is dark grey with an imuto logo and power button on the top surface, and multiple USB-A and USB-C ports on the front, along with a digital display.

## Introduction

Thank you for choosing the imuto 100W 26800mAh Portable Power Bank. This device is designed to provide reliable and fast charging for a wide range of electronic devices, including laptops, smartphones, tablets, and more. Featuring multiple output ports and a high-capacity battery, it ensures your devices stay powered on the go. Please read this manual carefully before use to ensure optimal performance and safety.

## Package Contents

- 1 x imuto 100W 26800mAh Portable Power Bank
- 1 x USB-C to USB-C 5A Cable
- 1 x User Manual (this document)
- 1 x Waterproof Bag

## Setup

Before first use, it is recommended to fully charge your imuto Portable Power Bank.

1. **Initial Charging:** Connect the included USB-C to USB-C cable to one of the USB-C ports (USB-C1 or USB-C2) on the power bank and to a compatible USB-C wall charger (not included, 90W recommended for fastest recharge). The LED display will show the charging progress.
2. **Full Charge Indication:** The power bank is fully charged when the LED display shows 100%. A full recharge with a 90W charger takes approximately 2 hours.

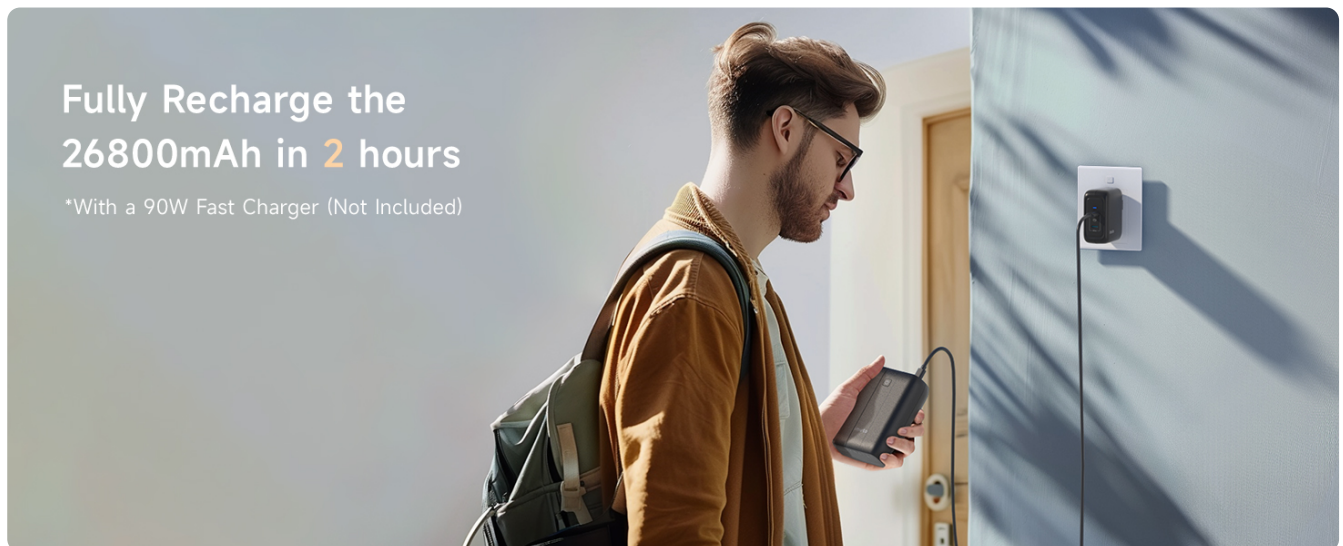


Image: A man is shown plugging the imuto power bank into a wall outlet using a USB-C cable and a wall adapter, illustrating the process of fully recharging the power bank. The text indicates it can be fully recharged in 2 hours with a 90W fast charger.

## Operating Instructions

The imuto Power Bank features multiple ports for versatile charging.

### Charging Your Devices

- **Standard Charging:** Connect your device to any of the available USB-C (USB-C1, USB-C2) or USB-A (USB-A1, USB-A2) ports using an appropriate charging cable. The power bank will automatically detect your device and begin charging.
- **Fast Charging:** The USB-C1 port supports up to 100W output, ideal for fast charging compatible laptops like MacBook Pro 16-inch. The USB-C2 port supports up to 60W. USB-A ports provide standard charging speeds.

- **Simultaneous Charging:** You can charge up to four devices simultaneously using all four ports. The total maximum output is 138W.

## 4-in-1 Fast Charging Power Bank



Image: The imuto power bank is shown connected to four different devices (a laptop, a smartphone, a gaming handheld, and another smartphone) via its four ports, demonstrating its 4-in-1 fast charging capability. Below the power bank are icons of various devices like MacBook Pro, Surface Pro, Legion Go, ROG Ally, Steam Deck, and Switch, with their respective charging wattages.

### Low Current Mode

For charging small devices that require low current, such as wireless earphones, smartwatches, or smart bracelets, activate the low current mode:

1. **Activation:** Double-click the power button on the power bank.
2. **Indication:** The LED screen will display "[]" to indicate that low current mode is active.
3. **Charging:** Connect your small device to a USB-A port.
4. **Deactivation:** Double-click the power button again to exit low current mode.



## Small Current Mode

Double click the power button to enter (the screen shows '11')

Image: A visual guide demonstrating how to activate the Small Current Mode on the imuto power bank by double-clicking the power button. The LED display is shown indicating "11" when the mode is active, with port labels for 15W and 18W USB-A outputs.

## Pass-Through Charging

The imuto Power Bank supports pass-through charging, allowing you to charge other devices while the power bank itself is being recharged. Connect the power bank to a wall charger via USB-C1 or USB-C2, and then connect your devices to the remaining available output ports.

## Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the surface of the power bank. Do not use liquid cleaners or abrasive materials.
- **Storage:** Store the power bank in a cool, dry place away from direct sunlight and extreme temperatures. For long-term storage, charge the power bank to approximately 50-70% every three months to prolong battery life.
- **Battery Care:** Avoid fully discharging the power bank frequently, as this can reduce its overall lifespan.

## Troubleshooting

- **Power Bank Not Charging:**
  - Ensure the charging cable is securely connected to both the power bank and the wall charger.
  - Verify that the wall charger is functioning correctly and provides sufficient power (e.g., 90W for optimal speed).
  - Try a different USB-C cable or wall charger.
- **Device Not Charging from Power Bank:**
  - Check if the power bank has sufficient charge.
  - Ensure the charging cable connecting the device to the power bank is not damaged and is securely connected.
  - Try a different port on the power bank.
  - For small devices, ensure Low Current Mode is activated if necessary.

- **Slow Charging:**

- Ensure you are using a fast-charging compatible cable and port (e.g., USB-C1 for 100W output).
- Some devices may limit charging speed based on their battery level or temperature.
- If multiple devices are connected, the total output power is shared, which may reduce individual charging speeds.

## Specifications

Feature	Specification
Model	X6G
Brand	imuto
Battery Capacity	26800 mAh / 99.16 Wh
Battery Composition	Lithium-ion
Input (USB-C1)	Up to 100W
Input (USB-C2)	Up to 60W
Output (USB-C1)	Up to 100W
Output (USB-C2)	Up to 60W
Output (USB-A1, USB-A2)	Standard USB-A output (Low Current Mode available)
Total Output	Max 138W
Connector Type	USB Type A, USB Type C
Special Features	Digital display, Fast charging, Discharge protection, LED indicator, Low Current Mode
Voltage	20 Volts (Max)
Amperage	5 A (Max)
Color	Black-DE
Product Dimensions	11.6L x 8.1W x 4.2Thick centimeters

High Quality & Large Capacity

26800mAh



iPhone 15

**5** charges

Galaxy S23

**4** charges

Macbook Air

**1** charges

Image: The imuto power bank is displayed with a large "26800mAh" overlay, emphasizing its high capacity. Below it, examples show how many times it can charge common devices: iPhone 15 (5 charges), Galaxy S23 (4 charges), and MacBook Air (1 charge).

## Safety Information

To ensure safe operation and prolong the life of your power bank, please observe the following:

- Do not expose the power bank to extreme temperatures (hot or cold), direct sunlight, or high humidity.
- Avoid dropping, impacting, or disassembling the device.
- Keep away from water and flammable liquids.
- Do not use if the power bank is visibly damaged or swollen.
- Keep out of reach of children.
- Dispose of the power bank responsibly according to local regulations.



Image: A stylized image of a circuit board with a glowing blue chip, symbolizing the internal safety protection mechanisms of the power bank designed to prevent overcharge, over-discharge, and other electrical issues.

## Warranty and Support

Your imuto 100W 26800mAh Portable Power Bank comes with a **24-month warranty** from the date of purchase.

This warranty covers manufacturing defects and ensures reliable performance. Additionally, imuto offers 7x24 hours customer support for any inquiries or assistance you may need.

For warranty claims or technical support, please refer to the contact information provided on the imuto official website or the product packaging.



Image: A flat lay of the imuto power bank, its packaging box, USB-C cable, and user manual, with a prominent shield icon displaying "2 YEAR Promise", indicating the product's warranty period.