




CMP 25513-6XX Nova Pool Drain with Sump User Manual

[Home](#) » [CMP](#) » CMP 25513-6XX Nova Pool Drain with Sump User Manual 



NOVA POOL DRAIN WITH SUMP

25513-26X, 25513-4XX, 25513-5XX, 25513-6XX, 25515-5XX, 25516-26X
25516-4XX, 25516-5XX, 25517-5XX, 25548-5XX

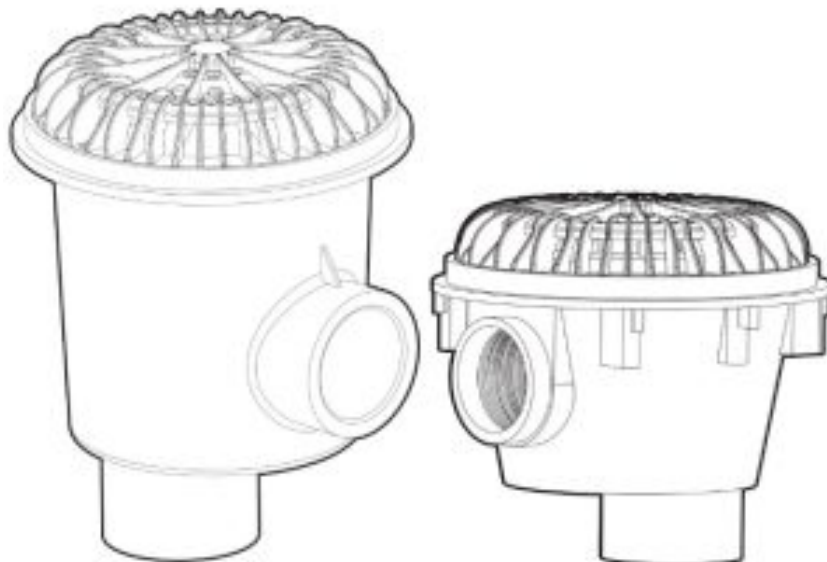

Contents

- 1 VGBA TESTED & CERTIFIED
- 2 SAFETY INSTRUCTIONS & PRECAUTIONS
- 3 SIZING & SPECIFICATION REFERENCE
- 4 INSTALLATION & MAINTENANCE
- 5 MAINTENANCE & INSPECTION
- 6 PART DIAGRAMS AND MEASUREMENTS
- 7 PARTS LIST
- 8 Documents / Resources
- 9 Related Posts

VGBA TESTED & CERTIFIED

ANSI-APSP 16 | CPSC

All Custom Molded Products main drains are listed and tested in strict accordance with the requirements of NSA/APSP – 16 2017, the current standard of reference for the Virginia Graeme Baker Act, and compliant with the latest Consumer Product Safety Commission (CPSC) requirements.

For Multiple Drain Use Only | Submerged | Cover Life: 7 Years | Floor or Wall



® IAPMO Listed VGBA Suction: Compliant to ANSI/APSP – 16 2017 & CPSC Requirements

SAFETY INSTRUCTIONS & PRECAUTIONS

When installing and using this equipment, basic safety precautions shall always be followed, including the following:

IMPORTANT SAFETY INSTRUCTIONS. READ, UNDERSTAND AND FOLLOW ALL INSTRUCTIONS. ALWAYS PLUMB AND INSTALL ALL SUCTION FITTINGS ACCORDING TO ALL BUILDING CODES THAT APPLY IN YOUR AREA.



WARNING

When using two or more suction fittings on a common suction line, suctions must be separated by a minimum of 3 ft or they must be located on two different planes.



WARNING

WARNING: DO NOT locate suction outlets on seating areas or on backrests for such seating areas.

NOTICE

Attention Installer: This manual contains important information about the installation, operation, and safe use of this product. Before installing this product, read and follow all warning notices and instructions which are included. This information should be given to the owner and/or operator of this equipment



WARNING

To reduce the risk of drowning from hair and body entrapment, install suction fittings with a marked flow rate in gallons per minute that exceeds the flow rate of your system by at least 25%. Always use multiple suction outlets. If the fitting/cover breaks, is damaged or is missing, shut the system down immediately. Do not use the system until damaged parts have been replaced.

NOTICE

Keep hair and clothing a minimum of 12 inches from all suction fittings and drains at all times. Persons with long hair should secure the hair to a minimal length or wear a swimming cap. Children should never be left unattended at any time in a swimming pool, spa, or bathtub. Be sure the temperature of the water never exceeds the

manufacturer's recommendations.

NOTICE

To reduce the risk of injury, installation and service should be done by a qualified Service Professional, certified an electrician or authorized CMP representative.

NOTICE

NOTE: In the event that one suction outlet is completely blocked, the remaining suction outlet(s) serving that system **MUST** have a flow rating capable of the full flow of the pump(s) for the specific suction system.



WARNING

The increasing size of the pump may increase the flow rate of suction beyond rated safety limits causing entrapment or death.

NOTICE

All Suction Outlet Fitting Assemblies (SOFAs) shall be installed in accordance with the manufacturer's installation instructions, or for Registered Design Professional SOFAs, in accordance with the registered design professional's engineering plans. Field modification made to a SOFA not authorized by the manufacturer's installation instructions shall void the SOFA certification.



WARNING

Hair or body parts blocking the spa or pool suction may become trapped and held against the suction fitting. Entrapment against the suction fittings can result in drowning or another severe injury. Never sit on or lean up against suction fittings. Never exceed the maximum allowable flow rate stated on the suction fitting. The suction fitting and fasteners should be inspected for damage or tampering before use. Missing, broken, or cracked suction fittings shall be replaced. Loose suction fittings shall be reattached or replaced before use of this facility.

NOTICE

The maximum hose length difference between any self-contained SOFA and the tee leading to the pump shall not exceed 13 feet (3.96 m).

NOTICE

CMP drain covers are only certified for use with CMP sumps and frames. Do not mismatch with parts from other manufacturers.

SAVE THESE INSTRUCTIONS

SIZING & SPECIFICATION REFERENCE

- Suction fitting configuration-specific flow ratings **MUST NOT** be exceeded at any time the pool is open to bathers.
- A system must install a suction fitting, or combination of multiple suction, such that the resulting individual suction system flow rating is greater than the pumping system's maximum system flow rate.
- To reduce the risk of drowning from hair and body entrapment, install suction fittings with a marked flow rate in gallons per minute that exceeds the flow rate of your system by at least 25%. The increasing size of the pump may increase the flow rate of suction beyond rated safety limits causing entrapment or death.
- Any modification that increases the flow rate of the circulation system shall require reevaluation of the cover/grate and sump to ensure that the flow rating of the Suction Outlet Fitting Assembly is not exceeded.
- The flow rating for pools with multiple, blockable SOFAs piped together in one body of water without isolation valves shall be determined by combining the flow rating of all SOFAs, minus the flow rating of one. If the flow ratings of all SOFAs are not equal, subtract the flow rating of the SOFA with the highest flow rating.
- **NOTICE:** No modification shall be made to a SOFA structure or flow path unless the new configuration has been certified as a new SOFA.


TABLE 1: IAPMO LISTED MAX FLOW RATES

PLUMBING SIZE	PORTS	FLOOR FLOW RATE	WALL FLOW RATE
3"	BOTTOM	184 GPM	128 GPM
3"	SIDE	188 GPM	124 GPM
2.5"	BOTTOM OR SIDE	156 GPM	124 GPM
2"	BOTTOM	150 GPM	120 GPM
2"	SIDE		124 GPM
1.5"	BOTTOM OR SIDE	144 GPM	124 GPM




FLOW RATE VERIFIED TO CPSC TEST PROTOCOL

TABLE 2: SPECIFICATIONS

PIPE SIZE	25513-5x – 2" FIP (ADAPTABLE TO 1.5") 25513-6x, 25516 – 2" SOCKET 25517, 25518 – 1.5" SOCKET x 2" SPIGOT 25513-2XX, 25516-2XX – 2.5" SOCKET 25513-4XX, 25513-3XX, 25516-4XX – 3" SOCKET DO NOT adapt suction fitting to any pipe size smaller than listed above.
OPEN AREA	14.57in ²
DRAIN COVER LIFE	7 Years. Replace drain cover and screws every seven years.
SUMP BODY LIFE	30 Years
• Multiple drain use ONLY	• PVC Sump Body. Use PVC glue to attach plumbing fittings. • Floor or wall installation

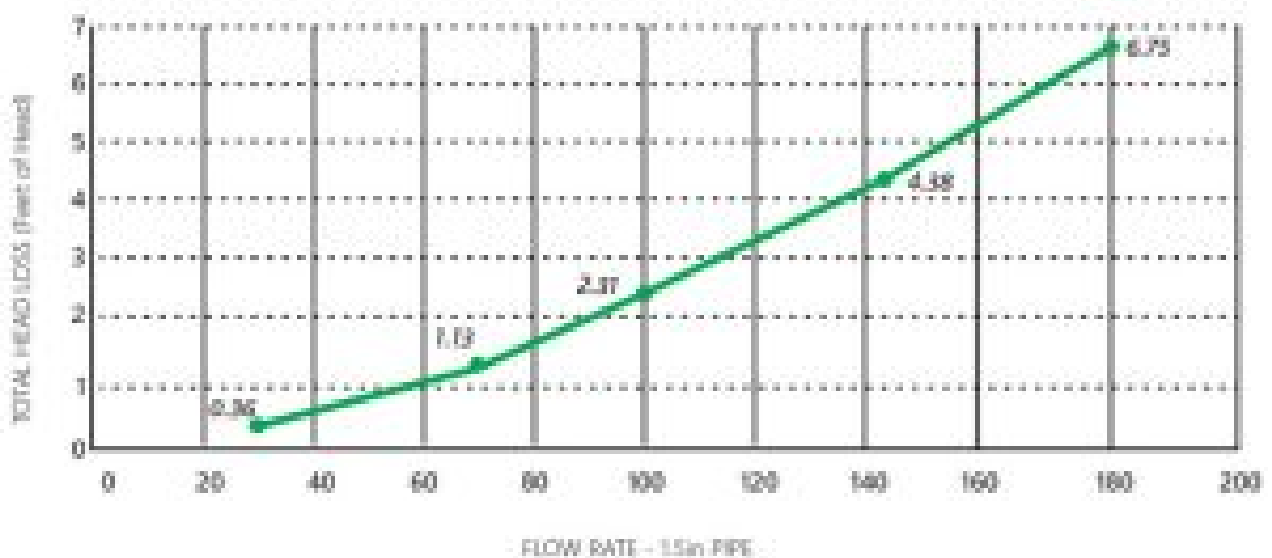

SIZING & SPECIFICATION REFERENCE

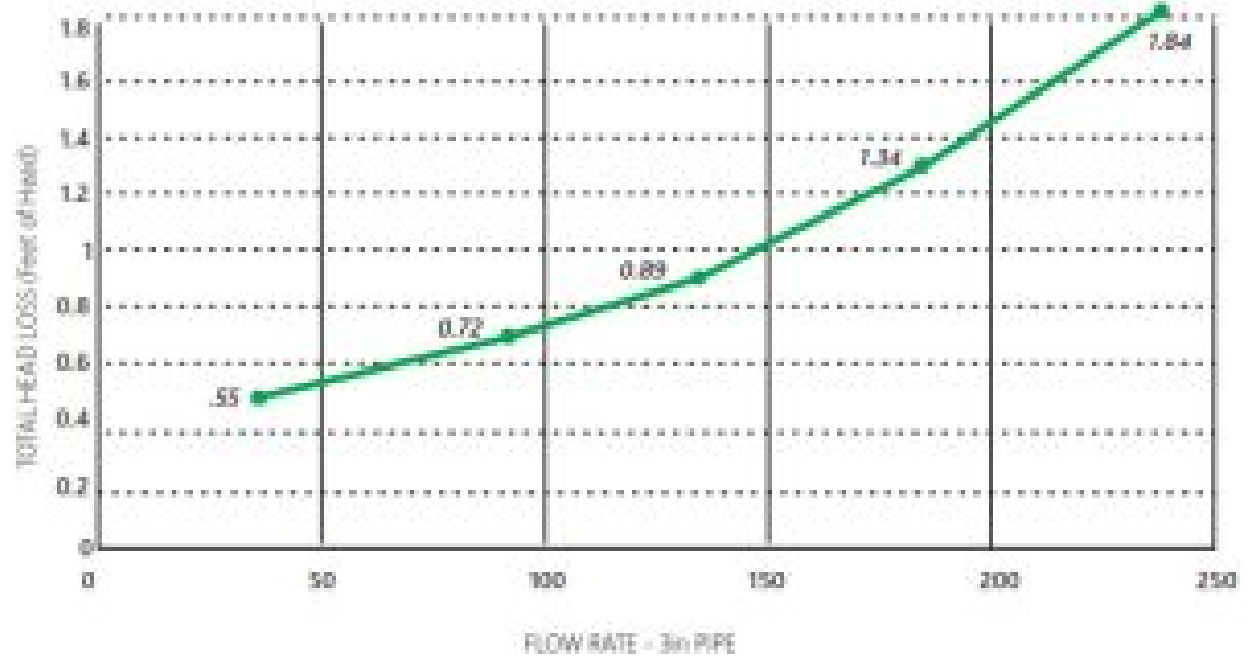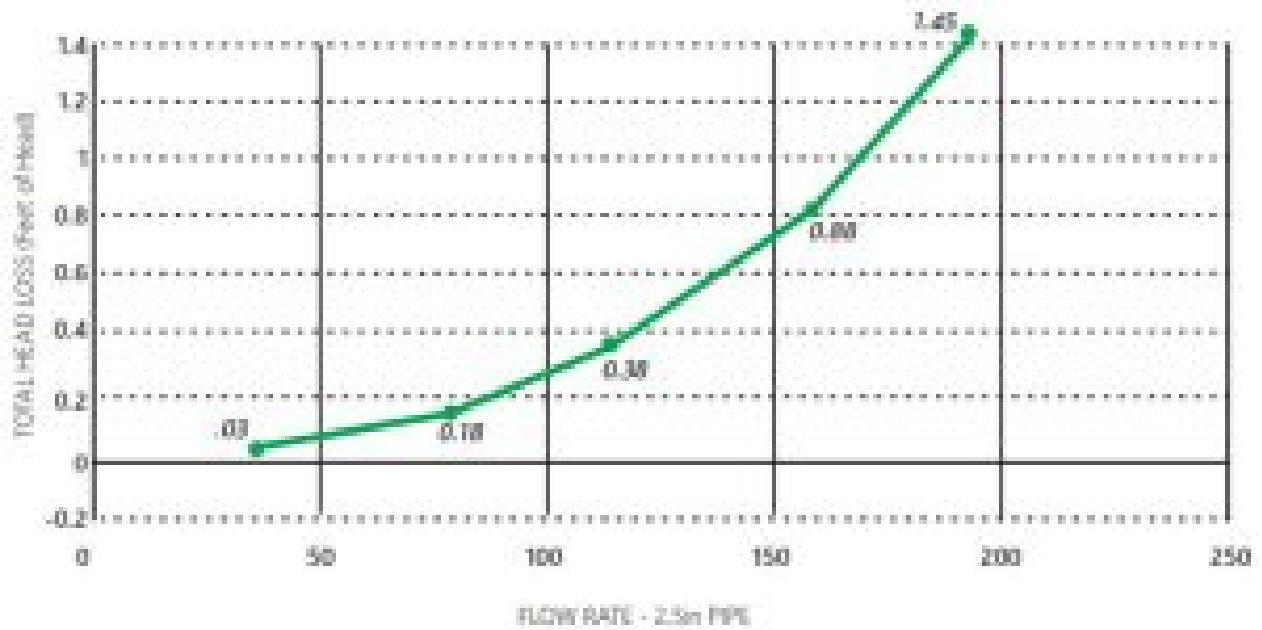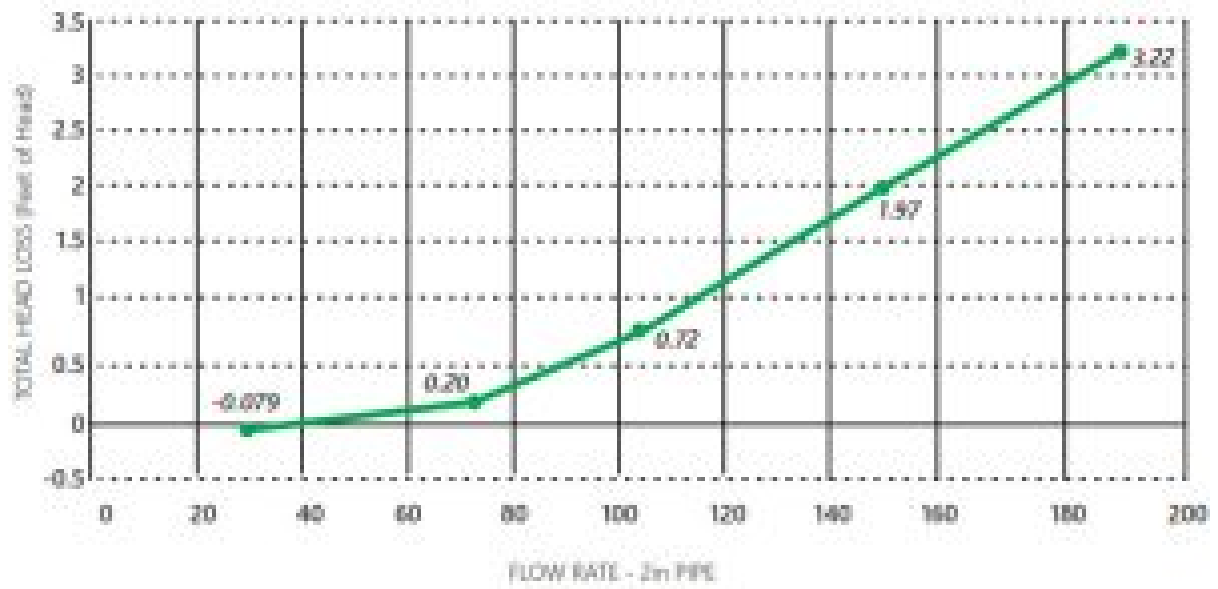

HEAD LOSS CHARTS

INSTALLATION & MAINTENANCE

1. REQUIRED FOR INSTALLATION

Your Nova Drain includes the following:

- Drain Sump Body
- Drain Suction Cover
- Cover Screws
- 2" Plugs (2)
- Protective Plaster Installation Cover
- 2" to 1.5" FPT Bushings (if threaded model)

2. INSTALLATION LOCATION

- This suction fitting is designed for installation on the floor or wall of gunite/shotcrete hot tubs or pools.
- Do not mount directly under seats.
- Always use multiple suction outlets. DO NOT use with single drain applications. Use with single drain applications will void any and all warranties. Single drain installation increases the risk of entrapment against the suction fittings, which can result in drowning or another severe injury. Blockable SOFAs shall be installed in a multiple SOFA system only.
- When using two or more suction fittings on a common suction line, suction must be separated by a minimum of 3 ft or they must be located on two different planes.

SAFETY CHECKLIST:

- Suction fitting and fasteners should be observed for damage or tampering before each use.
- DO NOT adapt suction fitting to any pipe size smaller than the sizes listed for the model in Table 2.
- Missing, broken, or cracked suction fittings shall be replaced before use. Loose suction fittings shall be reattached or replaced before use.

3. INSTALLATION PROCEDURE

PLUMBING:

- Install sump on floor or wall. If the sump is installed in the pool/spa floor, install it in the center of the pool/spa OR the deepest point.
- Cover/grates, when installed, shall not protrude more than 2 in. (51 mm) from the finished surface of the pool in which the SOFA is installed.
- See the Specifications chart for the plumbing size of your model.
- Plumb with either the bottom port OR side port. Plug the unused port with the included plug. On sumps with two bottom ports, the second port can be plugged or used for a hydrostatic valve.
- Maximum flow rates will vary depending on the plumbing option chosen. See Table 1 for details.

GUNITE INSTALLATION:

- IMPORTANT!** Leave the protective cover in place until plaster installation is complete. Use included cover screws to attach protective cover during installation.
- Finish pool with gunite/shotcrete and plaster so that it is completely level with the sump body and cover. Ensure the finish is completely level. The pool finish should not exceed the top of the sump.
- Remove the protective cover.
- When any SOFA component is held in place by the interior finish of the pool, that surface shall be free of deterioration and voids.

j. Attach cover/grate with the supplied screws. Verify that the suction cover is properly tightened with the #8 316 stainless steel screws in brass inserts to 16in-lbs. DO NOT over-torque the cover screw. Excessive torque can cause premature failure of threads or damage to suction fitting increasing the risk of entrapment. Start install of screws by hand to ensure proper thread engagement and to prevent cross-threading. DO NOT USE POWER TOOLS TO INSTALL FASTENERS.

INSTALLATION & MAINTENANCE

SOFA components and fastener receptacles shall be clean and free of debris or obstructions during the installation of cover/grate and fasteners. The use of adhesives or other attachment methods that prevent access to suction piping or SOFA components requiring periodic servicing is prohibited. Hand-check cover/grate for snugness to the sump/ frame after installation.

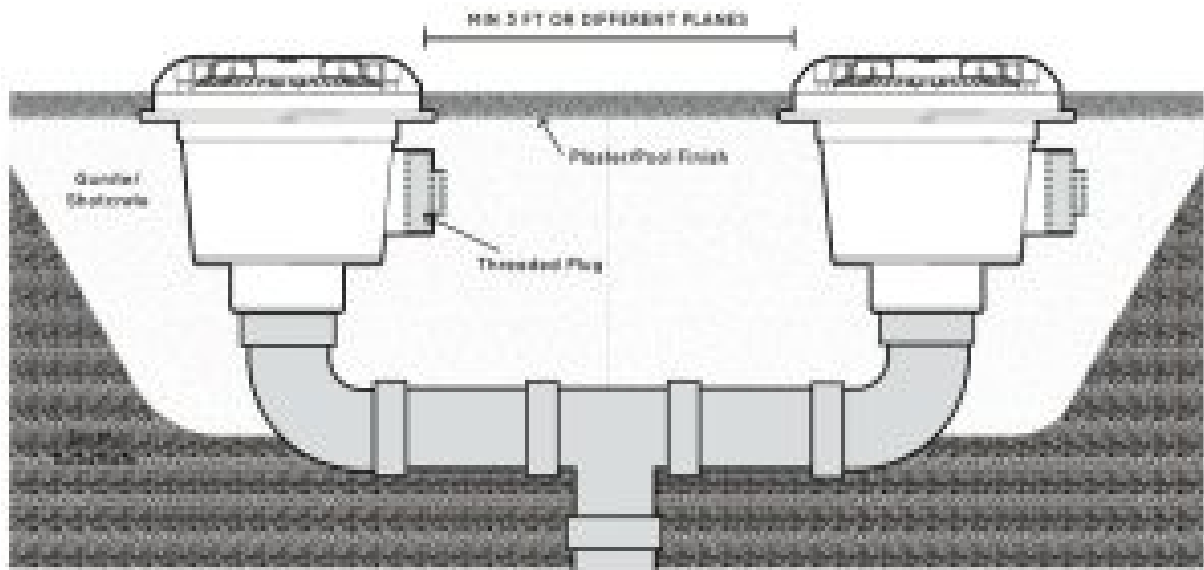


IMAGE 1 - INSTALLATION (BOTTOM PORT SHOWN)

INSTALLATION & MAINTENANCE

MAINTENANCE & INSPECTION

- Covers/grates and all other SOFA components shall be replaced before the end of their service life. Service life begins the month and year in which a SOFA component is installed with or without water. The cover/grate and screws should be replaced at least every seven (7) years. Sump and frame service life is 30 years.
- Inspect pool or spa regularly to ensure that the drain cover/grate is in place and secure.
- Missing, broken, or cracked SOFA components shall be replaced before bathers are allowed to use the pool or spa. Loose covers/grates shall be reattached before bathers are allowed to use the pool or spa.
- If the cover is found with color changed, broken, cracked, missing, brittle components with chunks or pieces broken off, it must be replaced. Do not use the pool/spa/facility until a replacement is made.
- If there are stripped screw holes or if the brass insert receptacles are missing/removed, the SOFA must be replaced. Do not use the pool/spa/facility until a repair or replacement is made.

f. If a drain cover/grate does not pass inspection:

- Close the pool or spa immediately
- Post a closure notice
- Keep the facility closed until a new drain cover and screws are properly installed.

3. WINTERIZING

- Requirements for winter will vary depending on the region – follow normal winter and freeze protection practices for your area.
- For areas that require partial drainage and/or clearing lines to prevent freeze damage:
- If your suction(s) have a dedicated suction line: Use a blower to clear the suction line of water and cap or close the line with a valve to prevent freeze damage.
- If your suction(s) are connected to a skimmer/equalizer line: Follow skimmer winterization procedures. Optionally blow and cap the suction line or fill line with foam rope/backer rod to protect from freeze damage.

PART DIAGRAMS AND MEASUREMENTS




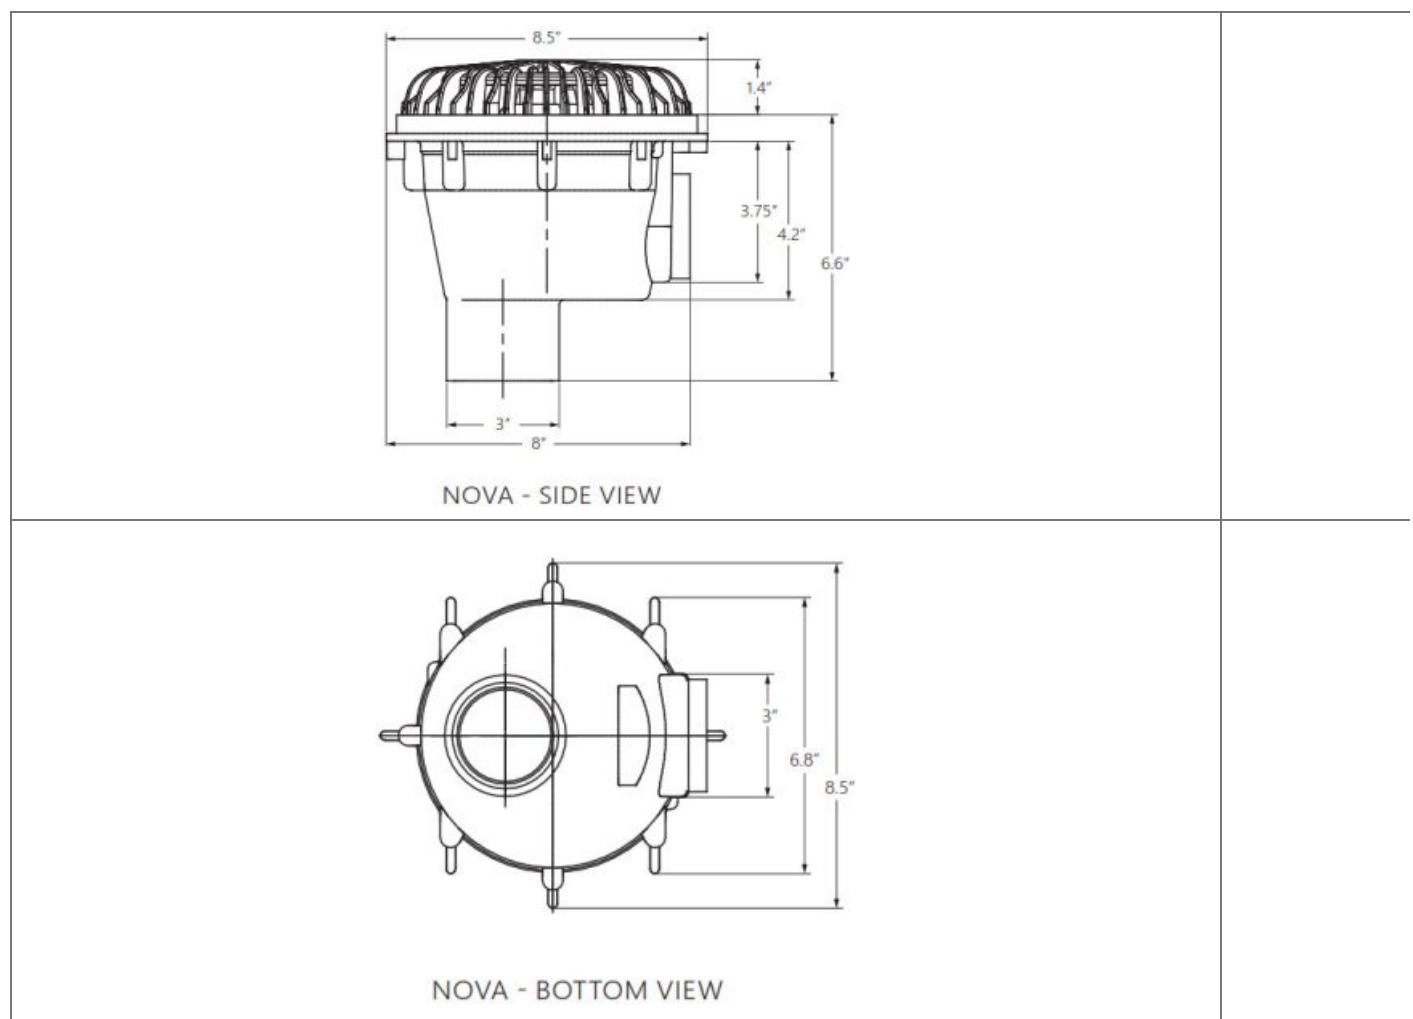


IMAGE 2 – DIMENSIONS

PARTS LIST

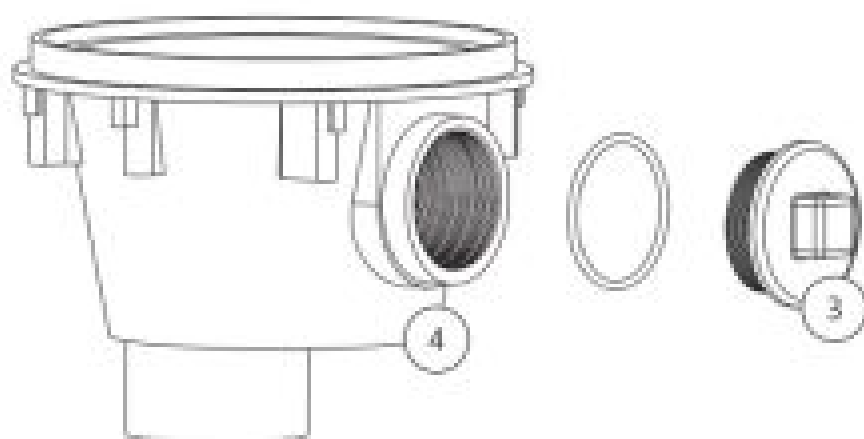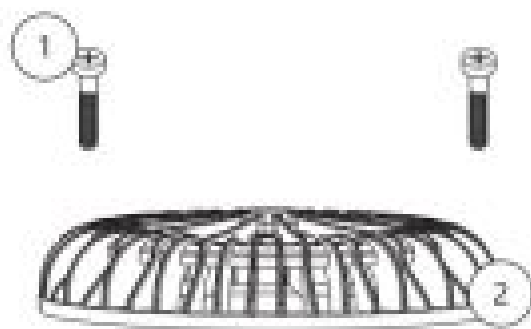

	CMP P/N	DESCRIPTION
1	61004-083-212	SCREWS FOR 25513, 25516
1	61051-052-028	SCREWS FOR 25515
1	61050-048-025	SCREWS FOR 25517
2	25539-700-011	COVER
3	25513-250-020	PLUG FOR 25513-26X, 25516-26X
3	25513-300-020	PLUG FOR 25513-4XX, 25516-4XX
3	25520-050-010	PLUG FOR 25513-5XX, 25516-5XX
4	25513-250-010	SUMP – 25513-26X
4	25513-300-010	SUMP – 25513-4XX
4	25513-010-010	SUMP – 25516-5XX
4	25513-110-010	SUMP – 25513-6XX
4	25516-250-010	SUMP – 25516-26X
4	25516-300-010	SUMP – 25516-4XX
4	25516-000-010	SUMP – 25516-5XX
4	25518-000-010	SUMP – 25517-5XX
—	25516-000-020	EXTENSION COLLAR

Parts numbers not listed in product table are only available as part of a complete assembly.

*See c-m-p.com or pool products catalog for other color and kit options

Record Information on this System Below & Keep for Your Records

Installer _____

Purchased From _____

Installation Date _____

Model Number _____

Pool Size in Gallons _____

CMP Customer Service & Tech Support

Toll Free: 1-800-733-9060

FAX: 770-732-7115

support@c-m-p.com

Warranty Questions


RMA@c-m-p.com

Support Resource & Videos Online

c-m-p.com/resourcecenter

CUSTOM MOLDED PRODUCTS |
36 HERRING ROAD, NEWNAN, GA 30265 |
WWW.C-M-P.COM

Documents / Resources



CMP 25513-6XX Nova Pool Drain with Sump [pdf] User Manual
Nova Pool Drain with Sump, 25513-26X, 25513-4XX, 25513-5XX, 25513-6XX, 25515-5XX, 25516-26X, 25516-4XX, 25516-5XX, 25517-5XX, 25548-5XX