



CODE3 CD3793 Flexible Directional Instruction Manual

[Home](#) » [CODE3](#) » CODE3 CD3793 Flexible Directional Instruction Manual 



CD3793 Flexible Directional
Instruction Manual

Contents

- [1 CD3793 Flexible Directional](#)
- [2 CONTENTS:](#)
- [3 SPECIFICATIONS:](#)
- [4 Mounting:](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

CD3793 Flexible Directional

WARNING!

Failure to install or use this product according to manufacturer's recommendations may result in property damage, serious injury, and/or death to those you are seeking to protect!



Do not install and/or operate this safety product unless you have read and understood the safety information contained in this manual.

1. Proper installation combined with operator training in the use, care, and maintenance of emergency warning devices are essential to ensure the safety of emergency personnel and the public.
2. Emergency warning devices often require high electrical voltages and/or currents. Exercise caution when

working with live electrical connections.

3. This product must be properly grounded. Inadequate grounding and/or shorting of electrical connections can cause high current arcing, which can cause personal injury and/or severe vehicle damage, including fire.
4. Proper placement and installation is vital to the performance of this warning device. Install this product so that output performance of the system is maximized and the controls are placed within convenient reach of the operator so that they can operate the system without losing eye contact with the roadway.
5. Do not install this product or route any wires in the deployment area of an air bag. Equipment mounted or located in an air bag deployment area may reduce the effectiveness of the air bag or become a projectile that could cause serious personal injury or death. Refer to the vehicle owner's manual for the air bag deployment area. It is the responsibility of the user/operator to determine a suitable mounting location ensuring the safety of all passengers inside the vehicle particularly avoiding areas of potential head impact.
6. It is the responsibility of the vehicle operator to ensure daily that all features of this product work correctly. In use, the vehicle operator should ensure the projection of the warning signal is not blocked by vehicle components (i.e., open trunks or compartment doors), people, vehicles or other obstructions.
7. The use of this or any other warning device does not ensure all drivers can or will observe or react to an emergency warning signal. Never take the right-of-way for granted. It is the vehicle operator's responsibility to be sure they can proceed safely before entering an intersection, drive against traffic, respond at a high rate of speed, or walk on or around traffic lanes.
8. This equipment is intended for use by authorized personnel only. The user is responsible for understanding and obeying all laws regarding emergency warning devices. Therefore, the user should check all applicable city, state, and federal laws and regulations. The manufacturer assumes no liability for any loss resulting from the use of this warning device.

CONTENTS:

1	Light Head
2	Screws
3	Installation Guide
4	Mounting Gasket
5	Bezel
6	Alcohol Wipe

SPECIFICATIONS:



Input Voltage	12-24VDC
Current	0.4A Max @ 12VDC 0.2A Max @ 24VDC
Physical H x W x L	2.75 in x 0.9 in x 0.4 in 6.9 cm x 2.3 cm x 1 cm
Ship Weight	0.1 lb (0.05 Kg)

Important! This unit is a safety device and it must be connected to its own separate, fused power point to assure its continued operation should any other electrical accessory fail.

Caution: When drilling into any vehicle surface, make sure the area is free from any electrical wires, fuel lines, vehicle upholstery, etc. that could be damaged.


Caution:

- light cannot be twisted or pulled
- do not bend in the lens direction
- Mounts to a surface curvature with a minimum radius of 3 inches.

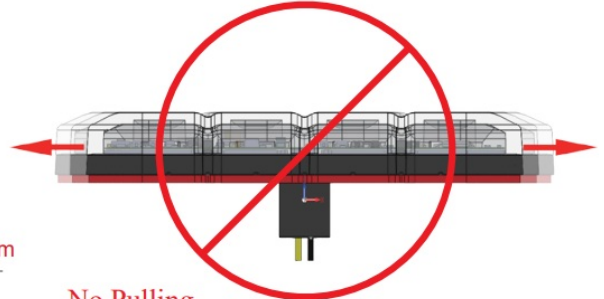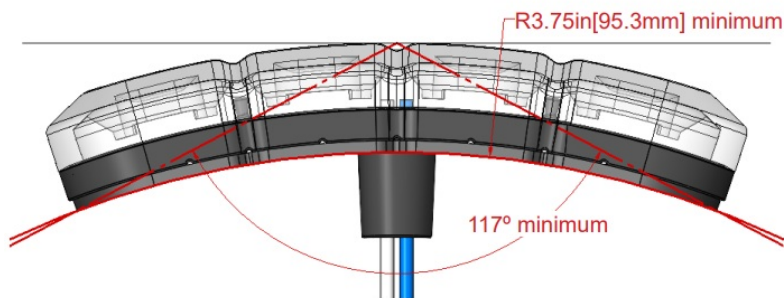

No Pulling


Can not pull the wire because the PCB and components will be damaged.

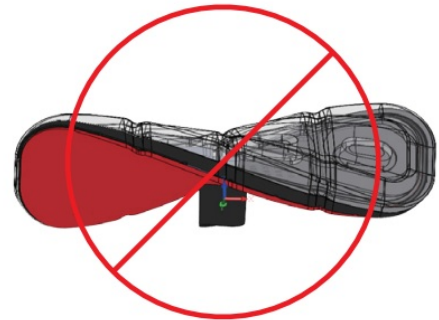

No Twisting

The product can't be twisted because the PCB and components will be damaged.

Mounting:

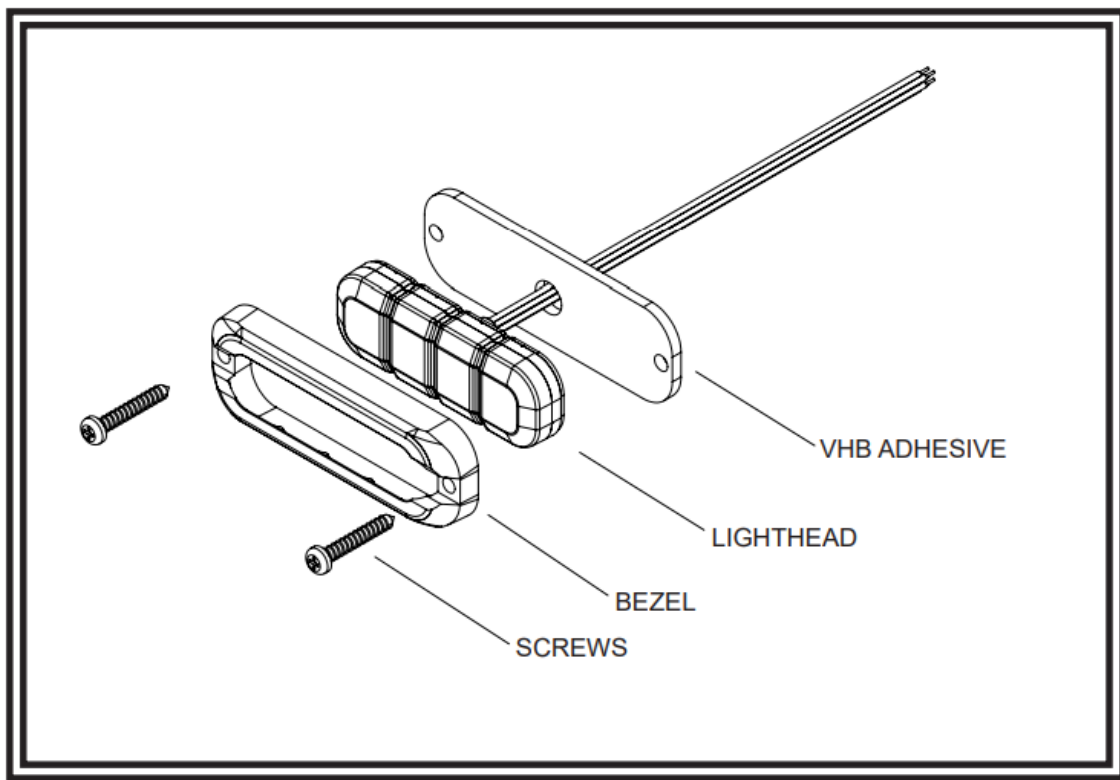

Mounting on a curved surface:

1. Mark hole location using gasket as a template and drill hole for wire exit using 11/32 in. drill bit.
2. Wipe surface clean with alcohol wipe. Wait until dry.
3. Mount light using VHB adhesive. Peel adhesive backing and apply pressure to adhere to surface for 20 seconds. It is recommended to allow 24 hours for adhesive to fully adhere before powering on light.

* Do not use hardware, gasket or bezel when mounting on curved surface.

* Max surface curvature 72°.

Mounting on flat surface:

1. Mark wire and screw locations using gasket as a template. Drill wire exit hole using 11/32 in. drill bit. Pre-drill screw holes using 3/64 in. drill bit.
2. Peel VHB backing and apply light to surface, aligning screw holes and wire exit. Apply pressure for 20 seconds. Insert screws through bezel to finish mounting lightheaded. It is recommended to allow 24 hours for adhesive to fully adhere before powering on light.



*For extra adhesion, use 3M Tape Primer. For product & application information, go to:

<https://multimedia.3m.com/mws/media/659520/3mtm-tape-primer-94.pdf>

Optional Mounting with Cut Bezel:

1. Identify the ribs on the inside of the provided bezel. Cut the bezel just before the first rib from the outer edge of the bezel. Do this with both sides.
2. Use the resulting edge pieces of the bezel to capture the ends of the light using the provided hardware in conjunction with the use of VHB.

Note: This mounting method should only be used in addition to the use of VHB.

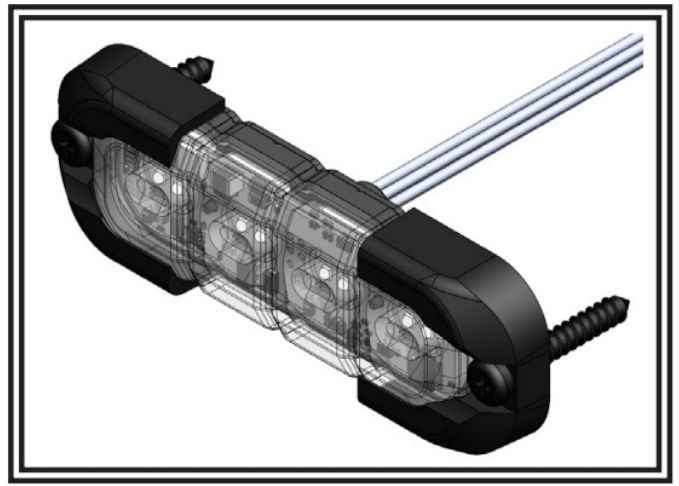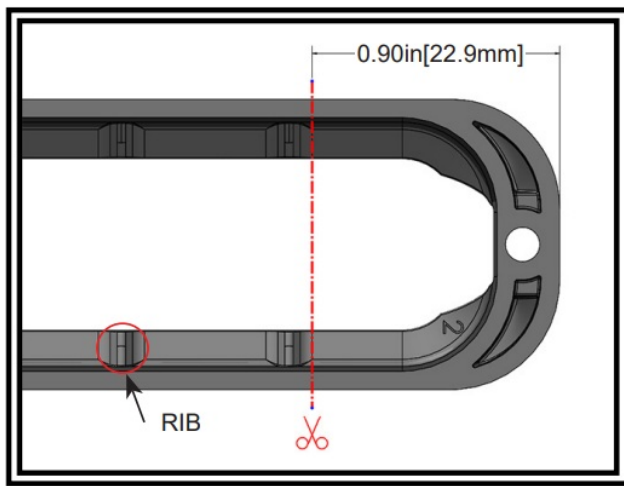

Wire:

RED: Positive, Colors 1 & 3 (need to add 5A fuse)

WHITE: Positive, Colors 2 & 4 (need to add 5A fuse)

RED & WHITE: Positive (Colors 1 & 3) & (Colors 2 & 4)

BLACK: Negative

BLUE: Pattern select to negative

YELLOW: Synchronized Function

(Up to 8 units can be Synchronized)

Operation Environment:

Ambient Temperature: -30 to 50°C (-22° F to 122°F)

Phase Operation:

Phase 1 (Ph1) flashes simultaneously with Ph1

Phase 2 (Ph2) flashes simultaneously with Ph2

Ph1 alternates with Ph2 (Up to 8 units can be Synchronized)

Apply BLUE TO BLACK wire:

-Less than 1 sec. for next pattern

-Between 1-3 sec for previous pattern

-Between 3-5 sec. for factory default

-More than 5 sec. for last pattern

DUAL COLOR DIRECTIONAL ED3793XX Flash Pattern Chart CD3793XX

Pattern	LED Color 1 & Color 3 3 Red line	LED Color 2 & Color 4 4 White line	LED Color 1 & Color 3 LED Color 2 & Color 4 Red & White line	PATTERNS	SYNC.	SAE J595				CA T13		
						RED	AMBER	BLUE	WHITE	RED	AMBER	BLUE
1	1-Default			SAE/T13 Single 75FPM Pk1 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 1	Class 1	Class B	Class B	Class B
	2		2	SAE/T13 Single 75FPM Pk2 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 1	Class 1	Class B	Class B	Class B
		1-Default	3	SAE/T13 Single 75FPM Pk1 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 1	Class 1	Class B	Class B	Class B
		2	4	SAE/T13 Single 75FPM Pk2 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 1	Class 1	Class B	Class B	Class B
	3	3	5	SAE/T13 Single 38FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
2	4	4	6	SAE/T13 Single 38FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	5		7	Single 120FPM Pk1 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
	6		8	Single 120FPM Pk2 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
		5	9	Single 120FPM Pk1 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
		6	10	Single 120FPM Pk2 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
3	7	7	11	Single 60FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	8	8	12	Single 60FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	9		13	Single 375FPM Pk1 Color 1 Synchronous Color 3	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	10		14	Single 375FPM Pk2 Color 1 Synchronous Color 3	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
		9	15	Single 375FPM Pk1 Color 2 Synchronous Color 4	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
4		10	16	Single 375FPM Pk2 Color 2 Synchronous Color 4	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	11	11	17	Single 187FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	12	12	18	Single 187FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	13		19	SAE/T13 Double 75FPM Pk1 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 1	Class 1	Class B	Class B	Class B
	14		20	SAE/T13 Double 75FPM Pk2 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 1	Class 1	Class B	Class B	Class B
5		13	21	SAE/T13 Double 75FPM Pk1 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 1	Class 1	Class B	Class B	Class B
		14	22	SAE/T13 Double 75FPM Pk2 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 1	Class 1	Class B	Class B	Class B
	15	15	23	SAE/T13 Double 38FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	16	16	24	SAE/T13 Double 38FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	17		25	ECER65SAE Double 120FPM Pk1 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
6	18		26	ECER65SAE Double 120FPM Pk2 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
		17	27	ECER65SAE Double 120FPM Pk1 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
	18		28	ECER65SAE Double 120FPM Pk2 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
	19	19	29	ECER65SAE Double 60FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	20	20	30	ECER65SAE Double 60FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
7	21		31	SAE/T13 Triple 75FPM Pk1 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	Class B	Class B	Class B
	22		32	SAE/T13 Triple 75FPM Pk2 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	Class B	Class B	Class B
		21	33	SAE/T13 Triple 75FPM Pk1 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	Class B	Class B	Class B
		22	34	SAE/T13 Triple 75FPM Pk2 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	Class B	Class B	Class B
	23	23	35	SAE/T13 Triple 38FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
8	24	24	36	SAE/T13 Triple 38FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	25		37	SAE Triple 120FPM Pk1 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
	26		38	SAE Triple 120FPM Pk2 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
		25	39	SAE Triple 120FPM Pk1 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
		26	40	SAE Triple 120FPM Pk2 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
9	27	27	41	SAE Triple 60FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	28	28	42	SAE Triple 60FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	29		43	SAE/T13 Quad 75FPM Pk1 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
	30		44	SAE/T13 Quad 75FPM Pk2 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
		29	45	SAE/T13 Quad 75FPM Pk1 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
10		30	46	SAE/T13 Quad 75FPM Pk2 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 2	Class 1	N/C	N/C	N/C
	31	31	47-Default	SAE/T13 Quad 38FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	32	32	48	SAE/T13 Quad 38FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	33		49	ECER65SAE Quad 120FPM Pk1 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 1	Class 1	N/C	N/C	N/C
	34		50	ECER65SAE Quad 120FPM Pk2 Color 1 Synchronous Color 3	yes	Class 1	Class 1	Class 1	Class 1	N/C	N/C	N/C
11		33	51	ECER65SAE Quad 120FPM Pk1 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 1	Class 1	N/C	N/C	N/C
	34		52	ECER65SAE Quad 120FPM Pk2 Color 2 Synchronous Color 4	yes	Class 1	Class 1	Class 1	Class 1	N/C	N/C	N/C
	35	35	53	ECER65SAE Quad 60FPM Pk1 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	36	36	54	ECER65SAE Quad 60FPM Pk2 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	yes	N/C	N/C	N/C	N/C	N/C	N/C	N/C
			55	Modulation (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	no	N/C	N/C	N/C	N/C	N/C	N/C	N/C
12	11		56	2 Double, 2 Quad (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	no	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	12		57	4 Single, 2 Triple (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	no	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	13		58	1 Double, 1 Triple, 1 Quad (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4)	no	N/C	N/C	N/C	N/C	N/C	N/C	N/C
		37	59	Steady burn-Color 1 & 3	no	N/C	N/C	N/C	N/C	N/C	N/C	N/C
	14		60	Steady burn-Color 2 & 4	no	N/C	N/C	N/C	N/C	N/C	N/C	N/C

Manufacturer Limited Warranty and Limitation of Liability:

Manufacturer warrants that on the date of purchase, this product will conform to Manufacturer's specifications for this product (which are available from the Manufacturer upon request). This Limited Warranty extends for Thirty-six (36) months from the date of purchase.

DAMAGE TO PARTS OR PRODUCTS RESULTING FROM TAMPERING, ACCIDENT, ABUSE, MISUSE, NEGLIGENCE, UNAPPROVED MODIFICATIONS, FIRE OR OTHER HAZARD; IMPROPER INSTALLATION OR OPERATION; OR NOT BEING MAINTAINED IN ACCORDANCE WITH THE MAINTENANCE PROCEDURES SET FORTH IN MANUFACTURER'S INSTALLATION AND OPERATING INSTRUCTIONS VOIDS THIS LIMITED WARRANTY.

Exclusion of Other Warranties:

MANUFACTURER MAKES NO OTHER WARRANTIES, EXPRESSED OR IMPLIED. THE IMPLIED WARRANTIES FOR MERCHANTABILITY, QUALITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ARISING FROM A COURSE OF DEALING, USAGE OR TRADE PRACTICE ARE HEREBY EXCLUDED AND SHALL NOT APPLY TO THE PRODUCT AND ARE HEREBY DISCLAIMED, EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW. ORAL STATEMENTS OR REPRESENTATIONS ABOUT THE PRODUCT DO NOT CONSTITUTE WARRANTIES.

Remedies and Limitation of Liability:

MANUFACTURER'S SOLE LIABILITY AND BUYER'S EXCLUSIVE REMEDY IN CONTRACT, TORT (INCLUDING NEGLIGENCE), OR UNDER ANY OTHER THEORY AGAINST MANUFACTURER REGARDING THE PRODUCT AND ITS USE SHALL BE, AT MANUFACTURER'S DISCRETION, THE REPLACEMENT OR REPAIR OF THE PRODUCT, OR THE REFUND OF THE PURCHASE PRICE PAID BY BUYER FOR NON-CONFORMING PRODUCT. IN NO EVENT SHALL MANUFACTURER'S LIABILITY ARISING OUT OF THIS LIMITED WARRANTY OR ANY OTHER CLAIM RELATED TO THE MANUFACTURER'S PRODUCTS EXCEED THE AMOUNT PAID FOR THE PRODUCT BY BUYER AT THE TIME OF THE ORIGINAL PURCHASE. IN NO EVENT SHALL MANUFACTURER BE LIABLE FOR LOST PROFITS, THE COST OF SUBSTITUTE EQUIPMENT OR LABOR, PROPERTY DAMAGE, OR OTHER SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES BASED

UPON ANY CLAIM FOR BREACH OF CONTRACT, IMPROPER INSTALLATION, NEGLIGENCE, OR OTHER CLAIM, EVEN IF MANUFACTURER OR A MANUFACTURER'S REPRESENTATIVE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. MANUFACTURER SHALL HAVE NO FURTHER OBLIGATION OR LIABILITY WITH RESPECT TO THE PRODUCT OR ITS SALE, OPERATION AND USE, AND MANUFACTURER NEITHER ASSUMES NOR AUTHORIZES THE ASSUMPTION OF ANY OTHER OBLIGATION OR LIABILITY IN CONNECTION WITH SUCH PRODUCT.

This Limited Warranty defines specific legal rights. You may have other legal rights which vary from jurisdiction to jurisdiction. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages.



<p>10986 North Warson Road St. Louis, MO 63114 USA (314) 996-2800 c3_tech_support@code3esg.com CODE3ESG.com</p>	<p>439 Boundary Road Truganina Victoria, Australia +61 (0)3 8336 0680 esgapsales@eccogroup.com CODE3ESG.com/au/en</p>	<p>Unit 1, Green Park, Coal Road Seacroft, Leeds, England LS14 1F B +44 (0)113 2375340 esguk-code3@eccogroup.com CODE3ESG.co.uk</p>
---	---	--

An ECCO SAFETY GROUP™ Brand
ECCOSAFETYGROUP.com
© 2022 Code 3, Inc. all rights reserved.
920-0971-01 Rev. A

Documents / Resources

	<p>CODE3 CD3793 Flexible Directional [pdf] Instruction Manual CD3793 Flexible Directional, CD3793, Flexible Directional, Directional</p>
--	--

References

- [Home - ECCO](#)
- [Home - ECCO](#)
- [Home - ECCO](#)
- [Home - ECCO Safety Group](#)