

COMCUBE
8413 Dissolved
Oxygen Pen



Comcube 8413 Dissolved Oxygen Pen Owner's Manual

[Home](#) » [COMCUBE](#) » Comcube 8413 Dissolved Oxygen Pen Owner's Manual 

Contents

- [1 Comcube 8413 Dissolved Oxygen Pen](#)
- [2 Robust Design](#)
- [3 Ordering Code](#)
- [4 Dissolved Oxygen Pen w/ long cable probe 8413](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)

COMCUBE

Comcube 8413 Dissolved Oxygen Pen




Robust Design

Clever probe design to ensure you get accurate readings without damaging the sensing tip.



Easy Maintain

Simply re-fill the electrolyte and replace the membrane cap every 6 months to keep measuring accurate.

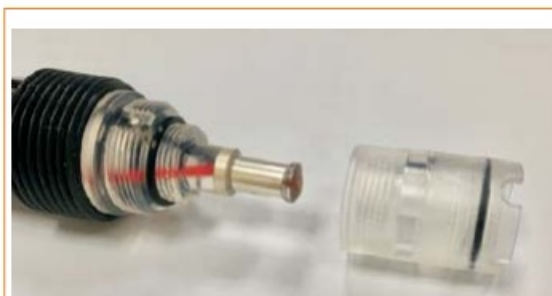

D.O. REPLACEMENT PROBE

P/N:VZ8413PAZ

Size:20(dia.) x 130mm(l)

Cable length : 3 meters

Ordering Code

- VZ8413AZ, 8413 meter w/8413P D.O. Probe
- VZ8413AZ1, 8413 meter w/ 5M long 8413P Probe
- VZ8413PAZ, 3M long cable D.O probe with protection cap for 84131/8413,
- VZ8413PAZ1, 5M long cable D.O probe with protection cap for 84131/8413
- VZ84PAAZ, 5 membrane cap w/2 electrolyte set

Dissolved Oxygen Pen w/ long cable probe 8413

- Big LCD with D.O. & Temperature display
- 100% D.O. calibration in air. The chemical is not required
- Easy replaceable thin membrane kit with high sensitivity
- Refill electrolytes quickly. Simple to maintain
- Selectable % and mg/L unit for D.O. Value
- C/ F automatic temperature compensation built-in
- Manual salinity and barometric pressure compensation
- Environment green re-chargeable battery via type C port
- Brightness adjustable backlight for dark places



Auto
Power Off



Low
Battery



HOLD



Auto Temp.
Compensation



Metric/
Imperial



Backlight



IP65




USB TypeC
for power charging



Model	8413
DO range (in mg/L)	0.00~20.00 mg/L
DO accuracy	+/-0.4 mg/L
DO resolution	0.01 mg/L
DO range (in %)	0.0~199.9
DO accuracy	+/-3% F.S
DO resolution	0.1 %
Temp. range	0~50.0°C/32~122°F
Temp. accuracy	+/-0.5°C/0.9°F
Temp. resolution	0.1°C
Auto Temp. Compensation	10~40.0°C/50~104°F
Manual Compensation	INCLUDED
Salinity range	0.0~45.0 ppt
Salinity res.	0.1 ppt
Barometric pressure	500~760mmHg/101.3~66.7Kpa
Pressure res.	1mmHg/0.1KPa
LCD size	30(H)x18(W)mm
Operating temp.	0~40°C
Operating RH%	Humidity<85%
Storage temp.	0~40°C
Storage RH%	Humidity < 80%
Sensor response time	<30 seconds
Sensor warmup time	<60 seconds after power up
Sensor life time	>6 months (with good maintenance)
Dimension	176(L)x39(W)x39(H)
Weight	265g
Battery	3.7V@500mAh re-chargable battery
Power consumption	60 hours operation (no backlight condition)
Re-charging time	1.5 hours
Standard Package	Meter (with bat. Built-in)/D.O. Probe/Electrolyte /2pcs membrane kits/USB-type C charging cable/ hard storage case/manual

Documents / Resources

	<p>Comcube 8413 Dissolved Oxygen Pen [pdf] Owner's Manual 8413, 8413 Dissolved Oxygen Pen, Dissolved Oxygen Pen, Oxygen Pen, Pen</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.