



COMMAND ACCESS TECHNOLOGIES POD Module Instructions

[Home](#) » [COMMAND ACCESS TECHNOLOGIES](#) » [COMMAND ACCESS TECHNOLOGIES POD Module Instructions](#) 

Contents

- [1 COMMAND ACCESS TECHNOLOGIES POD Module](#)
- [2 INSERT INSTRUCTIONS](#)
- [3 Includes](#)
- [4 SPECIFICATIONS](#)
- [5 Wiring diagram – POD In-LINE Options](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)



COMMAND ACCESS TECHNOLOGIES POD Module



INSERT INSTRUCTIONS

The Power On Delay module is placed in-line & provides a built-in adjustable delay from .5-5 seconds for all types of electrified hardware: mortise & cylindrical locks, strikes, exit trim, & motorized latch retractions kits.



Includes

- A. 1- POD module



SPECIFICATIONS

- **Input Voltage:** 12V – 24VDC
- **Adjustable delay:** .5 – 5 seconds
- **Maximum output current:** 1 A
- The Delay is on the Yellow (-)

Trim Pot adjustment- Use a Small Phillips Screw Driver

- **Increase Delay** = Turn the dial clockwise.
- **Decrease Delay** = Turn the dial counter-clockwise

Wiring diagram – POD In-LINE Options

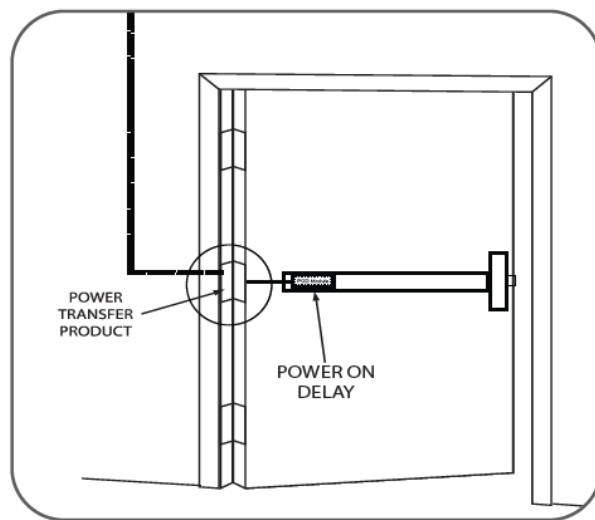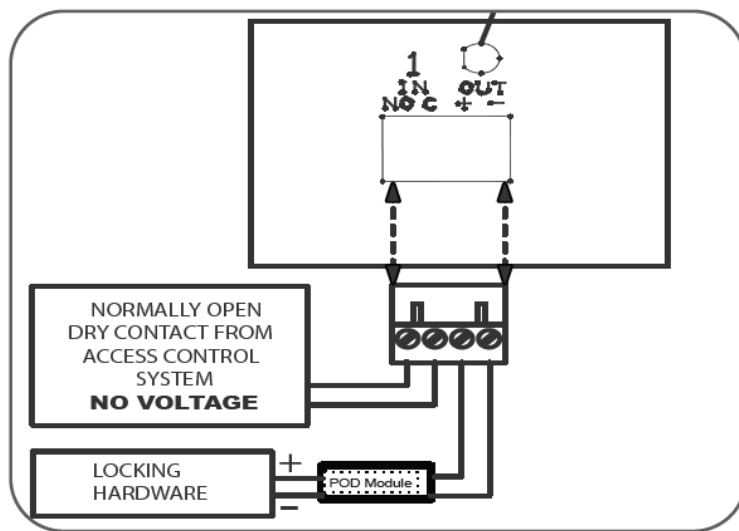

U.S. Customer Support

1-888-622-2377


Visit our website for more details

www.commandaccess.com.

Canada Customer Support

1-855-823-3002

Documents / Resources



[COMMAND ACCESS TECHNOLOGIES POD Module](#) [pdf] Instructions
POD Module, POD, Module