

COMMAND LIGHT C-Lite Mobile Light Tower User Guide

Home » COMMAND LIGHT » COMMAND LIGHT C-Lite Mobile Light Tower User Guide 🖺

Contents

- 1 COMMAND LIGHT C-Lite Mobile Light
- **Tower**
- **2 Product Information**
- **3 LIMITED WARRANTY**
- **4 General Description and Specifications**
- 5 Installation
- 6 Maintenance
- 7 Troubleshooting
- **8 Technical Specifications**
- 9 Documents / Resources
 - 9.1 References
- **10 Related Posts**



COMMAND LIGHT C-Lite Mobile Light Tower



Product Information

Command Light 3842 Redman Drive Fort Collins, CO 80524 PHONE: 1-800-797-7974

FAX: 1-970-297-7099

WEB: www.CommandLight.com

Thank You

Please allow us to express a simple thank you for investing in a COMMAND LIGHT product. As a company, we are dedicated to producing the very best and most versatile flood lighting package available.

We take great pride in the quality of our work and hope that you will find many years of satisfaction from the use of this equipment. Should you have any problems with your product, please do not hesitate to contact us.

User Guide

Please read this manual before installing or operating the C-Lite. Save this guide for future reference.

Limited Warranty

Five Years

COMMAND LIGHT warrants that the equipment is free from defects in materials and workmanship when used and operated for a period of five years. The responsibility of COMMAND LIGHT under this limited warranty is limited to the repair and replacement of any parts found defective.

• Parts must be returned to COMMAND LIGHT at the following address with transportation charges prepaid (C.O.D. shipments will not be accepted):

- Prior to returning defective parts, the original purchaser must make a claim in writing to COMMAND LIGHT at the above address, indicating the model number, serial number, and type of defect.
- No parts or equipment will be received by COMMAND LIGHT for repair or replacement under this warranty without specific written authority from it in advance.
- Any parts damaged by improper installation, overloading, abuse, or accident of any type or cause are not covered by this warranty.
- All equipment manufactured by us is tested before leaving our plant and is shipped in good working order and condition.

This warranty does not apply to defects caused by accident, misuse, neglect, or wear and tear. We cannot be held responsible for incidental and consequential expense and loss. This warranty also does not apply to equipment where alterations have been executed without our knowledge or consent. These conditions are readily discernible when the equipment is returned to us for inspection.

If you have any questions or need assistance with your COMMAND LIGHT product, please contact us using the provided contact information.

THANK YOU

Please allow us to express a simple thank you for investing in a COMMAND LIGHT product. As a company we are dedicated to producing the very best and most versatile flood lighting package available. We take great pride in the quality of our work and hope that you will find many years of satisfaction from the use of this equipment.

Should you have any problems with your product please do not hesitate to contact us.

COMMAND LIGHT

3842 Redman Drive Fort Collins, CO 80524

PHONE: 1-800-797-7974FAX: 1-970-297-7099

• WEB: www.CommandLight.com



PERSONAL RESPONSIBILITY CODE

The member companies of FEMSA that provide emergency response equipment and services want responders to know and understand the following:

- Firefighting and Emergency Response are inherently dangerous activities requiring proper training in their hazards and the use of extreme caution at all times.
- 2. It is your responsibility to read and understand any user's instructions, including purpose and limitations, provided with any piece of equipment you may be called upon to use.
- 3. It is your responsibility to know that you have been properly trained in Firefighting and/or Emergency Response and in the use, precautions, and care of any equipment you may be called upon to use.
- 4. It is your responsibility to be in proper physical condition and to maintain the personal skill level required to operate any equipment you may be called upon to use.
- 5. It is your responsibility to know that your equipment is in operable condition and has been maintained in accordance with the manufacturer's instructions.
- 6. Failure to follow these guidelines may result in death, burns or other severe injury.



Fire and Emergency Manufacturers and Services Association, Inc. P.O. Box 147, Lynnfield , MA 01940 www.FEMSA.org

Copyright 2006 FEMSA. All Rights Reserved

LIMITED WARRANTY

Five Years

COMMAND LIGHT warrants that the equipment is free from defects in materials and workmanship when used and operated for a period of five years. The responsibility of COMMAND LIGHT under this limited warranty is limited to the repair and replacement of any parts found defective. Parts must be returned to COMMAND LIGHT at 3842 Redman Drive, Ft Collins, Colorado 80524 with transportation charges prepaid (C.O.D. shipments will not be accepted).

Prior to returning defective parts to COMMAND LIGHT, the original purchaser shall make a claim in writing to COMMAND LIGHT at the above address indicating the model number, serial number and type of defect. No parts or equipment will be received by COMMAND LIGHT for repair or replacement under this warranty without specific written authority from it in advance.

Any parts damaged by improper installation, overloading, abuse or accident of any type or cause are not covered by this warranty.

All equipment manufactured by us is tested before leaving our plant, and is shipped in good working order and condition. We therefore extend to the original purchasers the following Limited Warranty for the period of five years from the original date of purchase:

1. This warranty does not apply to defects caused by accident, misuse, neglect, or wear and tear, nor can we be

held responsible for incidental and consequential expense and loss, nor does this warranty apply to equipment where alterations have been executed without our knowledge or consent. These conditions are readily discernable when the equipment is returned to us for inspection.

- 2. On all component parts not manufactured by COMMAND LIGHT, their warranty is to the extent that the manufacturer of such component warrants them to COMMAND LIGHT, if at all. Look in your local business telephone directory for the nearest repair station for the brand of parts you have or write to us for the address.
- 3. If equipment received has been damaged in transit, a claim should be made against the carrier within three days, as we assume no responsibility for such damage.
- 4. Any service other than our Authorized Service voids this warranty.
- 5. This warranty is in lieu of and is intended to exclude all other warranties, express or implied, oral or written, including any warranties of MERCHANTIBILITY or FITNESS for a particular purpose.
- 6. Travel time paid at a maximum of 50% and only if pre-approved.

Breakage or Damage During Shipment

The transportation company is fully responsible for all shipping damage and will resolve problems promptly if you handle it correctly. Please read these instructions carefully.

Examine the contents of all shipping cases. If you find any damage, call your transportation agent at once and have them make a description on the freight or express bill describing the damage and the number of pieces. Then contact us and we will send you the original bill of lading. Also promptly contact the transportation company and follow their procedure for filing a claim. Each company will have a unique procedure to follow.

Please note, we cannot and will not enter claims for damages. If we filed claim here, it would be sent to your local freight agent for verification and investigation. This time can be saved by you filing the claim directly. Every consignee is on the ground floor, in contact with the local agent who inspects the damaged goods, and thus, each claim can be given individual attention.

Since our goods are packed to comply with the regulations of all railroad, truck, and express companies, we cannot allow deduction from any invoice because of any damage, however, be sure to file your claim promptly. Our goods are sold F.O.B. factory. We take receipt from the transportation company certifying that the goods were delivered to them in good order and our responsibility ceases.

It is seldom that any breakage or damage occurs in any of our shipments and in no case will the customer be out any expense if they follow the above instructions.

Be sure to keep all damaged goods subject to examination of the truck or express company inspector, who may call on you some time later. These damaged goods, of course, will belong to them, and they will inform you what to do with them. If you dispose of these damaged goods, your claim may not be paid.

General Description and Specifications

Optimal Operating Voltage	12VDC
Acceptable Operating Voltage	11-13VDC
Max Amp Draw	17.5 Amp

Electrical Wiring


The C-Lite is provided with 25 feet of 12AWG-2 Conductor Cable color coded with red and black wires. Provide a 12VDC+ signal on the red wire and a 12VDC Ground signal on the black wire to power the C-Lite. Reversing

these wires may cause damage to the internal circuitry or components of the C-Lite.

A 20 amp fuse is recommended to protect the C-Lite from electrical damage.

With the wired controller, power and ground are connected in the controller box. The 8 conductor cable is the only cable that runs from the wired controller to the C-Lite. If shortening the control cable, note the location of all wires and install them as they were received from the factory.

Wired Controller Wiring

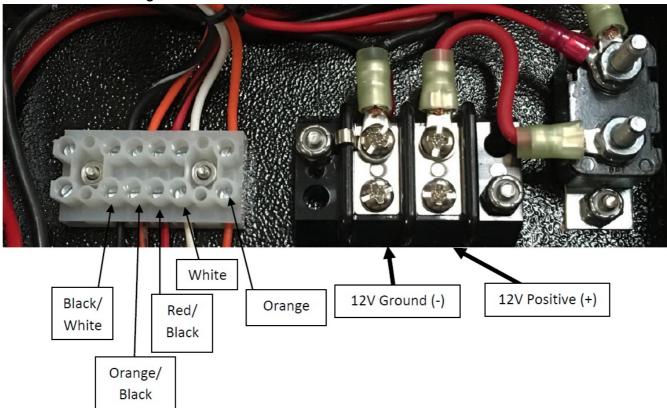

Installation

The C-Lite must be installed by a designated installation facility by qualified personnel only. All safety precautions must be thoroughly understood before installation. Please consult the factory for additional installation information assistance.

Included Parts

- Four (4) 1/4-20 x 1" Hex Head Bolt Eight (8) 1/4" Flat Washer
- Four (4) 1/4-20 Nyloc Nut
- Four (4) ½" Straight Sealcon with Nut One (1) Command Light Screwdriver One (1) User Guide

Tools Required

- 7/16" Wrench and Socket
- · Drill with assorted bits

Maintenance


Cleaning

The C-Lite is constructed with corrosion resistant aluminum and stainless steel fasteners. To further enhance corrosion resistance all exposed surfaces receive a powder coated paint finish. To assure years of trouble free service periodically clean all external surfaces with a mild detergent solution and a gentle spray of water. DO NOT USE A HIGH-PRESSURE WASHER, which will force water into sensitive electric circuitry.


Troubleshooting

If the C-Lite stops operating, disconnect and reconnect power. If operation does not resume, test for a valid 12VDC power source and ground. If this does not remedy the issue, contact Command Light at 1-800-797-7974 for Technical Support.


Technical Specifications

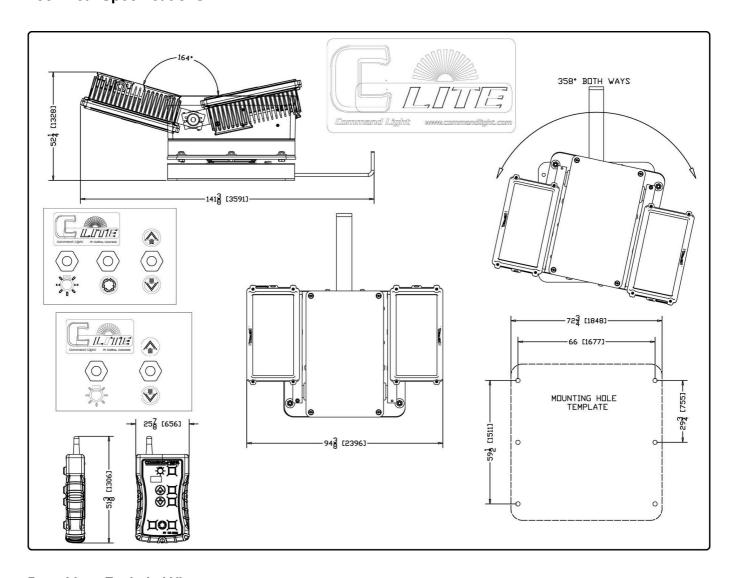


Parts List – Exploded View

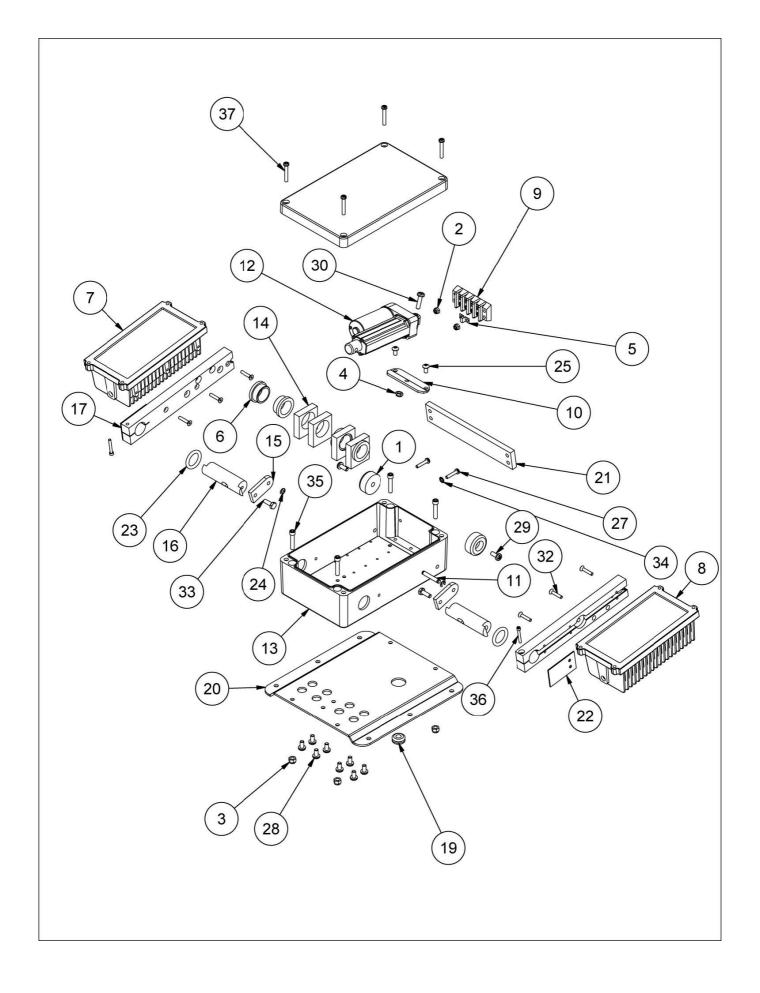


ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	008-11100	FEET, ROUND, 2", BLACK, NANO
2	2	034-10981	NUT,NYLOCK, 10-24 UNC,SS
3	4	034-11033	NUT,NYLOCK, 1/4-20 UNC,SS
4	1	034-11116	NUT,NYLOCK,THIN, 1/4-20 UNC,SS
5	1	065-12315	JUMPER,RELAY BOX
6	4	065-12381	BUSHING,1 IN,FLANGE 1.5,THRML POLY,SRTBL
7	1	065-13999	FIXTURE,LED,75W,12VDC,2 DEGREE,BLK,CLITE
8	1	065-14000	FIXTURE,LED,75W,12VDC,8 DEGREE,BLK,CL
9	1	069-14249	TRW, STRIP, 4 POLE
10	1	082-00054	BRACKET, MOUNT, ACTUATOR, C-LITE
11	1	082-00056	PIN, ROTATION, C-LITE
12	1	082-00059	ACTUATOR,12V,1000 NEWTON,50mm STRK,CLITE
13	1	082-00067	ENCLOSURE,MACHINED,1590Z162BK
14	4	082-00068	BLOCK,BEARING,SHAFT,C LITE
15	2	082-00070	ARM, ROTATOR, C-LITE
16	2	082-00072	SHAFT, ROTATION, C-LITE
17	2	082-00093	ARM,LAMP,C LITE
18	1	082-00094	COVER, LAMP MOUNT, C-LITE
19	1	082-00105	GROMMET,ID.438,OD.938,.438H for .188THIC
20	1	082-00134	MOUNT,ENCLOSURE,C LITE (LOW PROFILE)
21	1	082-00136	MOUNT, DUEL LAMP, C-LITE
22	2	082-00138	COVER, LAMP ARM, C-LITE
23	2	AS568A-318	ORING,ID 0.975,SIZE 0.975,AS568A-318
24	2	SSER-16	E-Ring, X5133-21, .027T, SS
25	2	STD HARDWARE BHM40	SCREW,BH,HEX,6x1x12,SS
26	8	STD HARDWARE57	SCREW,PHP,10-24 UNCx0.5
27	2	STD HARDWARE61	SCREW,PHP,10-24 UNCx1
28	8	STD HARDWARE80	SCREW,PHP,1/4-20 UNCx0.5
29	2	STD HARDWARE81	SCREW,PHP,1/4-20 UNCx0.625
30	1	STD HARDWARE84	SCREW,PHP,1/4-20 UNCx1
31	4	STD HARDWARE-FHMS-131	SCREW,FHPMS,1/4-20 UNC x 7/8 in,SS
32	6	STD HARDWARE-FHSH-47	SCREW,FHSH,10-24x1,SS
33	4	STD HARDWARE-HHCS-04	SCREW,HH,1/4-20x3/4,SS
34	1	STD HARDWARE-IEW-69	WASHER,LOCK,18-8SS,EXTERNAL,#10
35	4	STD HARDWARE-SHCS-64	SCREW,SHCS,1/4-20x1-1/4,SS
36	2	STD HARDWARE-SHCSM40	SCREW,SHCS,SHCS M4x0.7x30
37	4	Screw, M6	SCREW,LID,M6, C-LITE

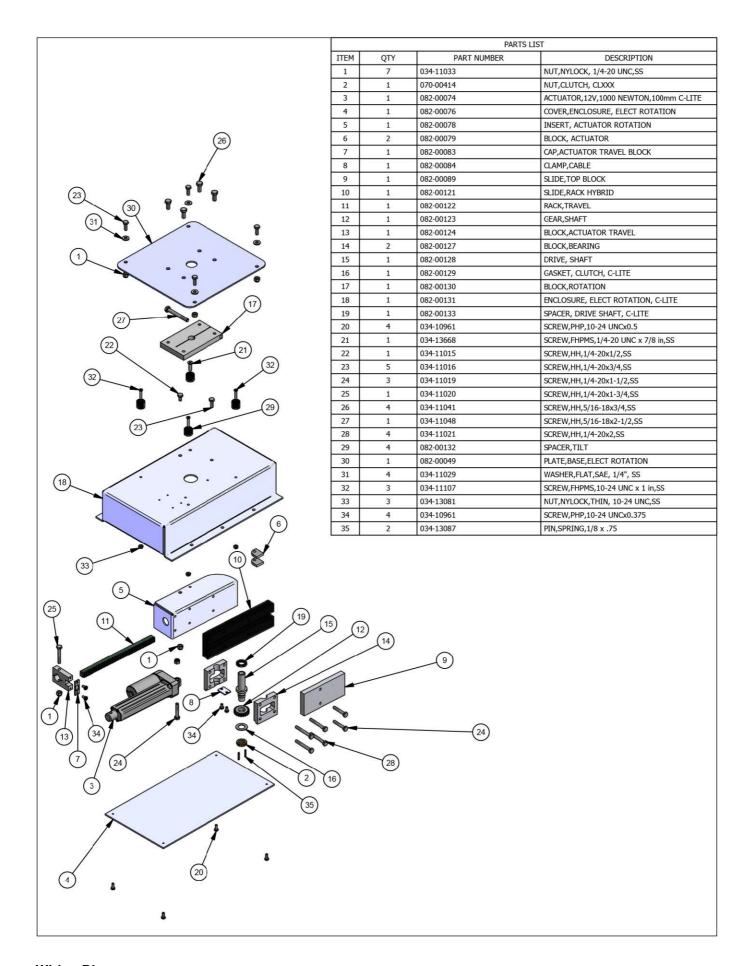

Wiring Diagram

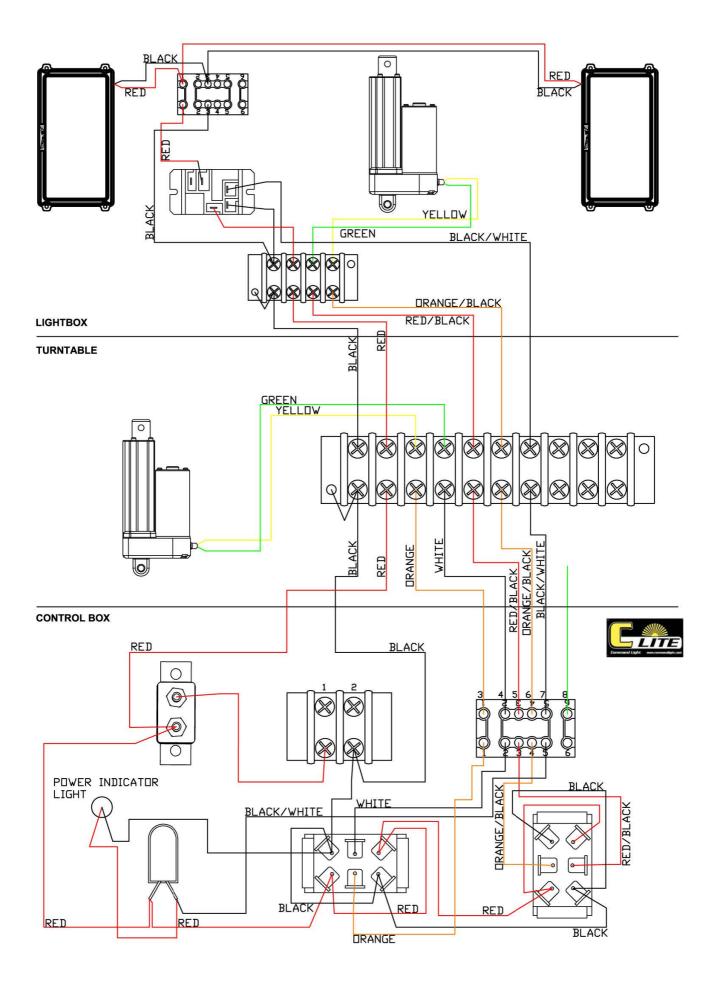

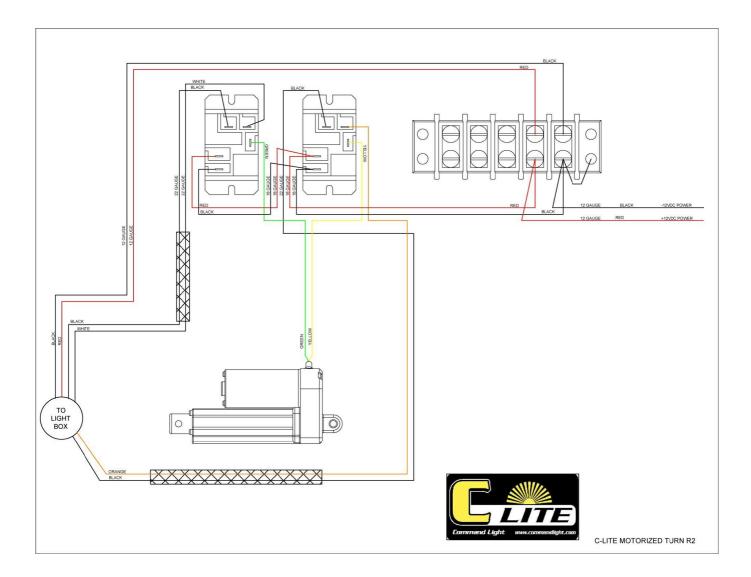

Documents / Resources



<u>COMMAND LIGHT C-Lite Mobile Light Tower</u> [pdf] User Guide C-Lite, C-Lite Mobile Light Tower, Mobile Light Tower, Tower

References

• Example 1 Fire Truck Scene Lights | Command Light Towers and LED Traffic Advisors

Manuals+,