



Command 17006CLR-ES Hooks Clear Instructions

[Home](#) » [COMMAND](#) » Command 17006CLR-ES Hooks Clear Instructions 

Contents

- [1 Command 17006CLR-ES Hooks Clear](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Frequently Asked Questions \(FAQ\)](#)
- [5 USING INSTRUCTIONS](#)
- [6 Warranty](#)
- [7 CONTACT](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)



Command 17006CLR-ES Hooks Clear



Product Information

- This product is designed for hanging items on smooth surfaces.
- It is important to follow the instructions carefully to avoid any damage.

Specifications

- **Model:** 17006CLR-ES
- **Recommended Surface:** Smooth surfaces
- **Cleaning:** Clean the surface with rubbing alcohol. Do not use household cleaners.

Product Usage Instructions

Applying the Strip

1. Start by cleaning the surface with rubbing alcohol. Ensure the surface is smooth.
2. Remove the black liner from the strip.
3. Apply the strip to the desired location on the wall.
4. Press the entire strip firmly against the wall for 30 seconds.

Removing the Strip

1. Wait for at least 1 hour before attempting to remove the strip.

2. Remove the blue liner from the strip.
3. Press the hook firmly against the strip for 30 seconds.

Tips for Removal

1. Gently hold the hook in place while removing the strip.
2. Always pull the strip straight down and never towards you.
3. To release the strip, slowly stretch it against the wall for at least 6 inches.

Frequently Asked Questions (FAQ)

- **Q:** Can I use household cleaners to clean the surface?
- **A:** No, it is recommended to clean the surface with rubbing alcohol and avoid using household cleaners.
- **Q:** How long should I wait before using the hook after applying the strip?
- **A:** It is recommended to wait for at least 1 hour before using the hook.
- **Q:** How should I remove the strip without causing damage?
- **A:** Gently hold the hook in place, pull the strip straight down, and slowly stretch it against the wall to release it.


USING INSTRUCTIONS

APPLY APLICAR

- Best for smooth surfaces. Clean with rubbing alcohol. Do not use household cleaners.



- Remove the black liner. Apply strip to wall. Press entire strip firmly for 30 sec.

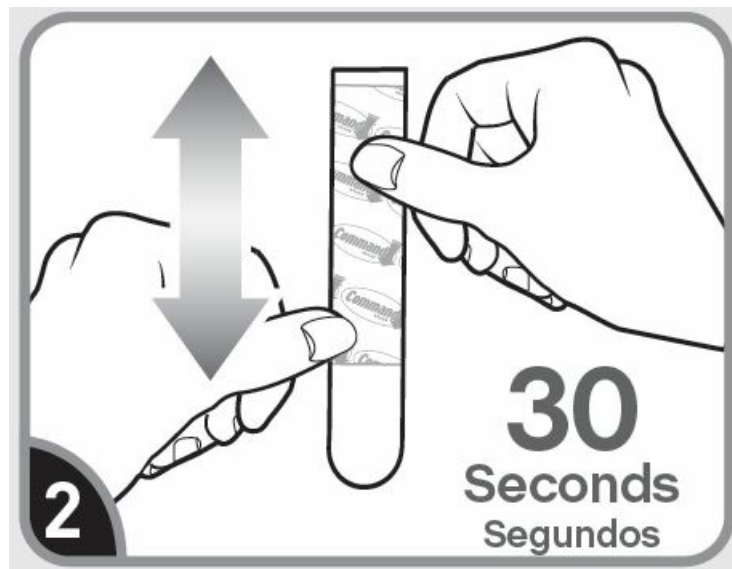


- Remove the blue liner. Press the hook to strip firmly for 30 sec. Wait 1 hour before use.



REMOVE RETIRAR


- Hold the hook gently in place.

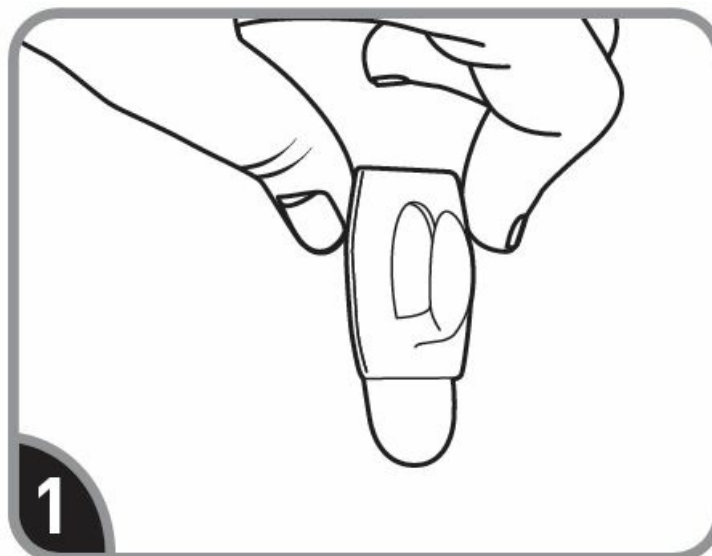

- Never pull the strip towards you! Always pull straight down.



- Stretch the strip slowly against the wall at least 6 inches to release.

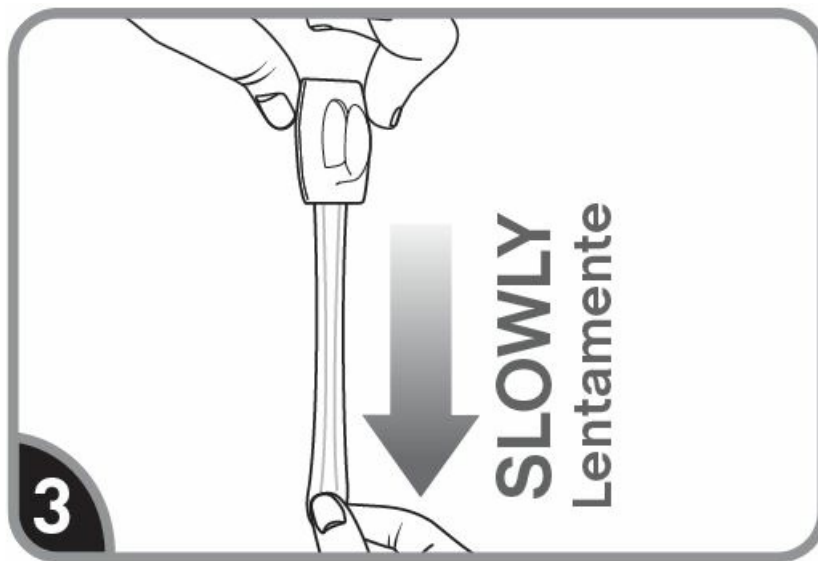

Hooks can be reused with Command® Clear Small Refill Strips.

CAUTION: Do not hang over beds, on windows, wallpaper or textured surfaces. Do not hang valuable or irreplaceable items or framed pictures. Use indoors 50°-105°F.


Warranty

Limited Warranty and Limitation of Liability (for products sold in the USA): This product will be free from manufacturing defects. If defective, your exclusive remedy shall be, at 3M's option, product replacement or refund. 3M will not be liable for any loss or damage arising from this product, whether direct, indirect, special, incidental or consequential.

CONTACT

- 17006CLR-ES
- command.com.
- Failure to follow instructions carefully may cause damage.
- Save instructions or visit command.com.
- Arrow.com.

Documents / Resources

	<p>Command 17006CLR-ES Hooks Clear [pdf] Instructions 17006CLR-ES Hooks Clear, 17006CLR-ES, Hooks Clear, Clear</p>
---	--

References

- [3M Redirecting to Command Brand](#)
- [User Manual](#)