



COMMAX MULTI-BUTTON DOOR CAMERA User Guide

[Home](#) » [COMMAX](#) » COMMAX MULTI-BUTTON DOOR CAMERA User Guide 


COMMAX®

SmartHome&Security



2019

PRODUCT GUIDE



HOME IoT SOLUTION SMART HOME SYSTEM CIP SYSTEMMODUM SYSTEM SMART GATE SYSTEM GATE
VIEW SYSTEM AUDIO GATE SYSTEM FINE VIEW GUIDE MULTI-BUTTON DOOR CAMERA MULTI BUTTON
AUDIO UNIT DOORPHONE INTERPHONE / INTERCOM SMART CCTV SYSTEM NURSE CALL SYSTEM
SMART DOOR LOCK




AHD CCTV

COMMAX'S SPECIALIZED ANALOG CCTV SYSTEM IS SUITABLE FOR CUSTOMER'S CONVENIENT EXPERIENCE IN SINGLE OR SMALL COMPLEX HOUSES.

- COST-EFFECTIVE CAMERA
- NIGHT SHOOTER CAMERA
- PTZ CAMERA
- ALL IN ONE STAND-ALONE DVR
- STAND-ALONE DVR INTERLOCKING WITH VIDEO DOOR PHONE
- FREE CMS – MOBILE APP

FIELD OF CCTV APPLICATION

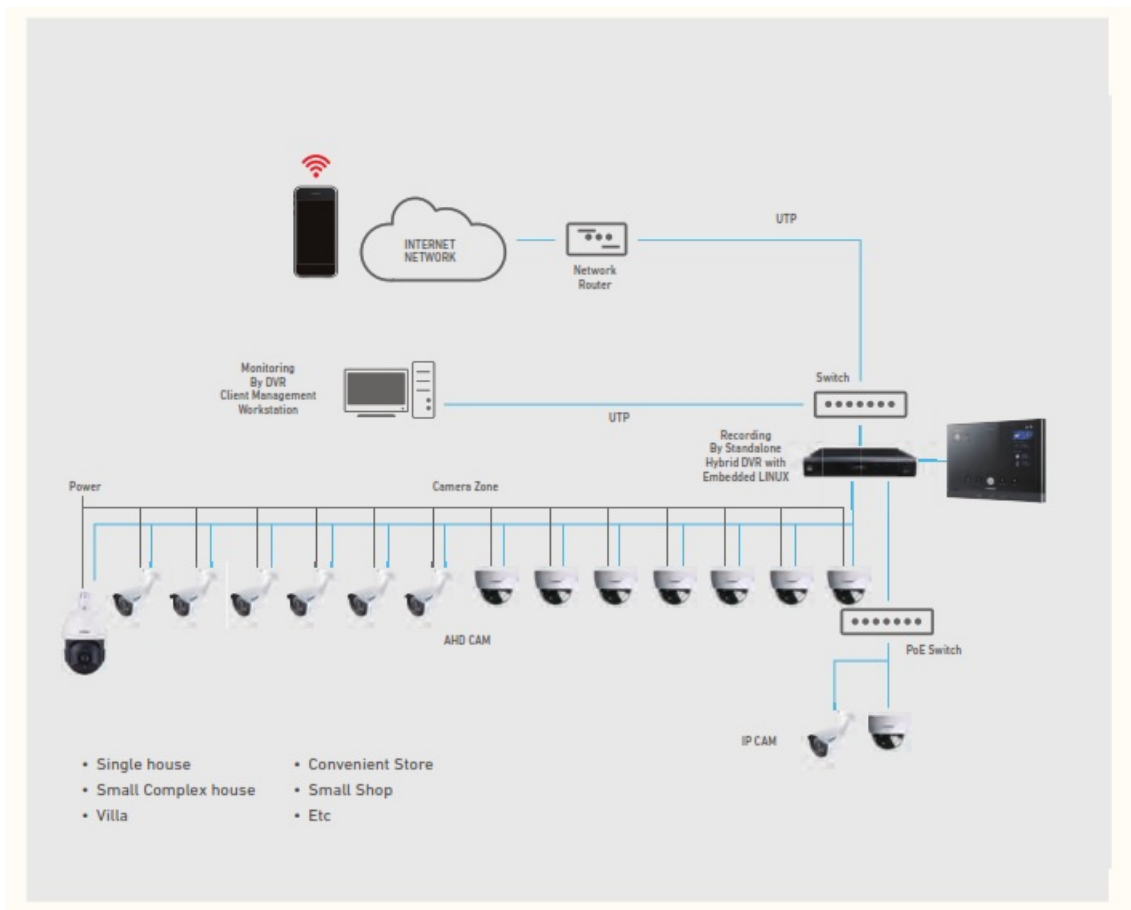

QHD IR DOME CAMERA CAD-4M04R24H



Contents

- 1 [PRODUCT FUNCTION](#)
- 2 [PRODUCT SPECIFICATION](#)
- 3 [Documents / Resources](#)
- 4 [Related Posts](#)

PRODUCT FUNCTION

- 4 Megapixel IR Dome Camera
- 1 /2.7" CMOS Image Sensor
- 3.6 mm Fixed Lens
- 4.0Megapixel @ 2688 x 1520

PRODUCT SPECIFICATION

Image Sensor	1 /2.7" CMOS Image Sensor
Min. Illumination	0.001 Lux / F1.2, OLux IR on
Lens	3.6mm Fixed
Video Output	2560 x 1440
Backlight Compensation	Off / BLC / HSBLC
DNR	2D-DNR (Off / LoW / MIDDLE / HIGH)
Digital WDR	Auto / On / Off
Operating Conditions	-10°C-50°C / Less than 90% RH
Power supply/Consump.	DC 12V 1.5A / Max. 3.48W
IR Range/LEDs	20M (05 x 24pcs)
Dimensions/Weight	092.3mm x77.5mm / 350g

QHD IR BULLET CAMERA CAU-4M04R2H



PRODUCT FUNCTION

- 4 Megapixel IR Bullet Camera
- 1 /27" CMOS Image Sensor
- 3.6 mm Fixed Lens
- 4.0Megapixel @ 2688 x 1520

PRODUCT SPECIFICATION

Image Sensor	1 /2.7" CMOS Image Sensor
Min. Illumination	0.001Lux / F1.2, 0Lux IR on
Lens	3.6mm Fixed
Video Output	2560 x 1440
Backlight Compensation	Off / BLC / HSBLC
DNR	2D-DNR (Off / LoW / MIDDLE / HIGH)
Digital WDR	Auto / On / Off
Operating Conditions	-10°C~50°C / Less than 90% RH
Power supply/Consump.	DC 12V 1.5A / Max. 4.08W
IR Range/LEDs	40M (2pcs Array IR Led)
Dimensions/Weight	174mm x 71mm x 65mm / 500g

QHD IR HOUSING CAMERA CAU-4M04RH2H



PRODUCT FUNCTION

- 4 Megapixel IR Housing Camera
- 1 /2.7" CMOS Image Sensor
- 3.6 mm Fixed Lens
- 4.0Megapixel @ 2688 x 1520

PRODUCT SPECIFICATION

Image Sensor	1 /2.7" CMOS Image Sensor
Min. Illumination	0.001Lux / F1.2, 0Lux IR on
Lens	3.6mm Fixed
Video Output	2560 x 1440
Backlight Compensation	Off / BLC / HSBLC
DNR	2D-DNR (Off / LoW / MIDDLE / HIGH)
Digital WDR	Auto / On / Off
Operating Conditions	-10°C~50°C / Less than 90% RH
Power supply/Consump.	DC 12V 1.5A / Max. 5.64W
IR Range/LEDs	60M (2pcs LED)
Dimensions/Weight	342mm x 138mm x 100mm / 500g

FHD HYBRID STARLIGHT IR DOME CAMERA CAD-2M04R24HL



PRODUCT FUNCTION

- 2 Megapixel Analog Hybrid Starlight IR Dome Camera
- 1 /2.8" Sony STARVIS CMOS Image Sensor
- 3.6mm Fixed Lens
- 30fps @ 1080p Full-HD
- IR LED 24pcs (Max. 15m)
- IP65

PRODUCT SPECIFICATION

Image Sensor	1 /2.8" Sony STARVIS CMOS Image Sensor
Min. Illumination	0Lux (IR LED ON)
Lens	3.6mm Fixed
Max. Image Resolution	1080P MAX.
Backlight Compensation	Off / BLC / HSBLC
DNR	3D-DNR (Off / LoW / MIDDLE / HIGH)
Digital WDR	Auto / On / Off
Operating Conditions	-30°C~40°C
Power supply/Consump.	DC 12V 1.5A / Max. 3.1W
IR Range/LEDs	15M (24pcs)
Dimensions/Weight	Ø93mm x 75mm / 330g


IP HOME SECU PLATFORM INTEGRATION / CONNECTABLE INTELLIGENCE / ALL IP



Interlock with Smartphone It provides camera screen surveillance and searches through an interlocking smartphone.



IP Connectable Devices
It can be connected with IP protocol.



Intelligent Video Analysis

It provides motion detection & tracking, trespass and loitering detection via intelligent video analysis.

Documents / Resources



[COMMAX MULTI-BUTTON DOOR CAMERA](#) [pdf] User Guide
MULTI-BUTTON DOOR CAMERA, DOOR CAMERA, CAMERA