

COMMSCOPE BUDI-R24NP0309A Fiber Distribution Terminals for FTTX Access User Guide


[Home](#) » [CommScope](#) » COMMSCOPE BUDI-R24NP0309A Fiber Distribution Terminals for FTTX Access User Guide 

Contents

- [1 COMMSCOPE BUDI-R24NP0309A Fiber Distribution Terminals for FTTX Access](#)
- [2 Product Classification](#)
- [3 General Specifications](#)
- [4 Dimensions](#)
- [5 Material Specifications](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)



COMMSCOPE BUDI-R24NP0309A Fiber Distribution Terminals for FTTX Access

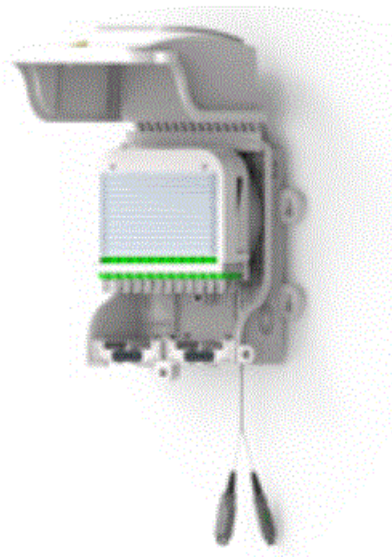

BUDI-R Terminal, 24-position, SC/UPC, Indoor plenum cable, MPO at far end, 100 ft

- Designed to provide a quick and simple solution for installing fiber in small and medium sized MDU's
- Incorporates a unique fiber cable spooling system that stores up fiber cable within the enclosure
- Removes the need for field termination and extensive site survey inspections

Product Classification

- **Regional Availability** Australia/New Zealand | Europe | North America
- **Portfolio** CommScope®
- **Product Type** Rapid distribution terminal
- **Product Brand** RapidReel®
- **Product Series** BUDI
- **Warranty** For more information, please consult our Product Warranty guidelines

General Specifications

- **Functionality** Patching | Slack storage
- **Adapters, quantity** 24
- **Cable Entry Location** Bottom
- **Cable Sealing Type** Gasket/grommet configuration
- **Cable Type** Indoor – Stranded
- **Color** Gray
- **Distribution Type** 24 ports
- **Interface, Input** SC
- **Interface Feature, Input** UPC
- **Interface, Output** Stub tail
- **Interface, stub** MPO
- **Lock Type** Security screw
- **Mounting** Wall mount
- **Port, quantity** 24

Dimensions

- **Height** 270 mm | 10.63 in
- **Width** 214 mm | 8.425 in
- **Cable Length** 30 m | 98.425 ft
- **Enclosure Size** Small

Material Specifications

Material Type Polycarbonate ABS (PC-ABS)

Optical Specifications

- **Fiber Mode** Singlemode

Fiber Type G.657.A2

Environmental Specifications

- **Operating Temperature** -40 °C to +65 °C (-40 °F to +149 °F)
- **Environmental Space** Indoor/Outdoor
- **Flammability Rating** UL 94 V-0
- **Qualification Standards** IEC 61753-1 | UL

Packaging and Weights


- **Packaging quantity** 1
- **Packaging Type** Carton

Footnotes

Warranty For more information, please consult our Product Warranty guidelines

©2022 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks,respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: July 21, 2022

Documents / Resources

	<p>COMMSCOPE BUDI-R24NP0309A Fiber Distribution Terminals for FTTX Access [pdf] User Guide</p> <p>BUDI-R24NP0309A, Fiber Distribution Terminals for FTTX Access, BUDI-R24NP0309A Fiber Distribution Terminals for FTTX Access, BUDI-R24NP0309A</p>
---	--

References

-  [CommScope | now meets next](#)

