



CONCEPTRONIC FEP 1612W380 16 Port Fast Ethernet PoE Switch Instructions

[Home](#) » [CONCEPTRONIC](#) » CONCEPTRONIC FEP 1612W380 16 Port Fast Ethernet PoE Switch Instructions 

Contents


- [1 CONCEPTRONIC FEP 1612W380 16 Port Fast Ethernet PoE Switch](#)
- [2 CONNECTION](#)
- [3 Short Description](#)
- [4 Description](#)
- [5 Additional Information](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)



CONCEPTRONIC FEP 1612W380 16 Port Fast Ethernet PoE Switch



CONNECTION

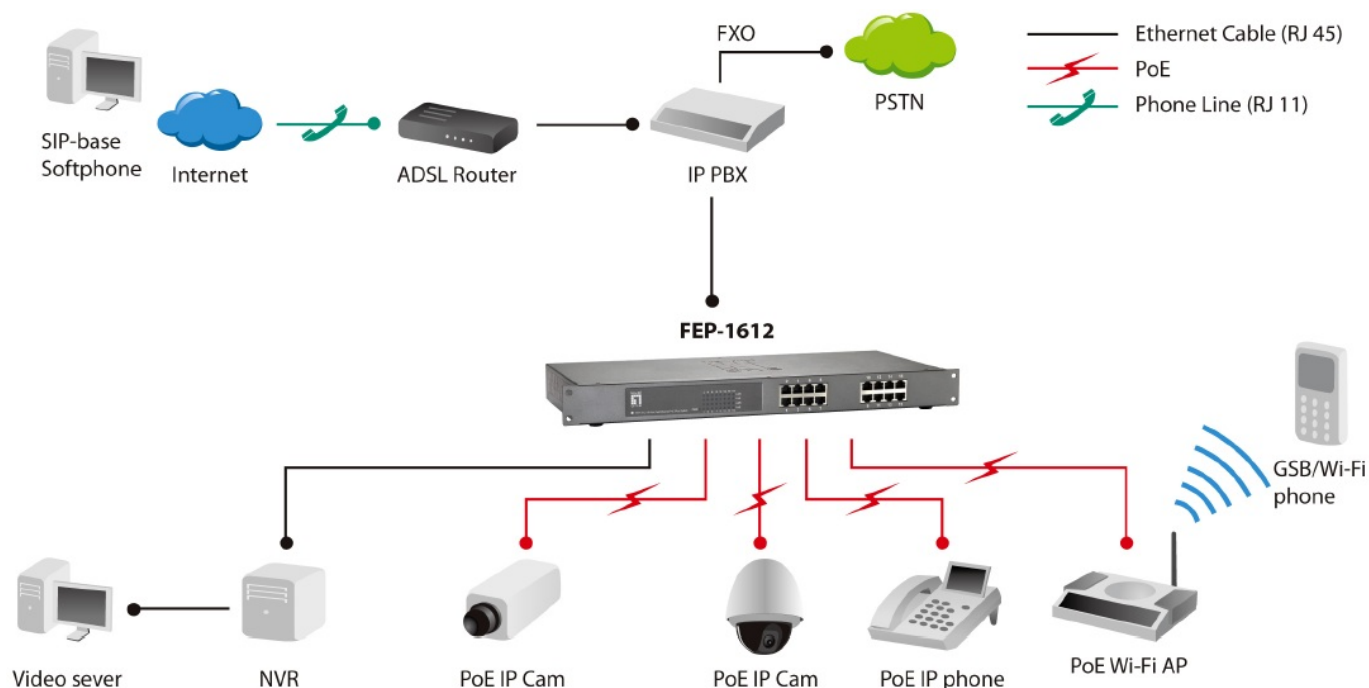

Short Description

- IEEE 802.3af/at PoE compliant to simplify deployment and installation
- Auto-detection and protection of non-standard PoE devices
- Supports 4K MAC address auto-learning and auto-aging
- 10/100Mbps, full/half-duplex, auto-negotiation, auto-MDI/MDIX
- 19-inch metal housing
- IEEE 802.3x Flow Control protects against lost packets for reliable data transmission.

Description

LevelOne FEP-1612 features 16 10/100Mbps Fast Ethernet ports with IEEE 802.3at/af PoE interfaces. It supports MDI /MDI-X convertible on 16 10/100Mbps ports and provides PoE inject function on PoE ports which are able to IEEE 802.3af or 802.3at compliant powered devices remotely. The FEP-1612 is equipped with the MDI/MDI-X auto detection for easy plug-and-play connection, regardless of cabling types in straight through or crossover. It also provides a simple, cost-effective, and highly reliable network connection for data and power transmission. Furthermore, it is the ideal device for bridging among Ethernet, Fast Ethernet workgroups, and networks. It fits all kinds of Ethernet installations such as campus, workgroup, department, enterprise, telecom or industrial applications. The FEP-1612 features a non-blocking 3.2Gbps backplane that greatly simplifies the tasks of upgrading your LAN for catering to increase bandwidth demands.

Additional Information

- Approval and compliance FCC, CE, RoHS
- Max. operating humidity (%) 90
- Max. operating temperature (°C) 45
- Max. storage humidity (%) 90
- Max. storage temperature (°C) 70
- Min. operating humidity (%) 10
- Min. storage humidity (%) 10
- Min. storage temperature (°C) -40

- IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3x Full-duplex Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+)
- Product weight (kg) 2,85
 - Product breadth (mm) 480
 - Product depth (mm) 200
 - Product height (mm) 44
 - Color Grey
 - EAN 4015867199893
 - Model number FEP-1612W380
 - Package contents FEP-1612 Stromkabel GummifüÙe Quick Installation Guide
 - 802.3af/at PoE 16
 - Switching capacity 3.2Gbps
 - Grade Commercial



Documents / Resources

Manuals+,