



CONCEPTRONIC USB Print Server Instructions

[Home](#) » [CONCEPTRONIC](#) » CONCEPTRONIC USB Print Server Instructions 

Contents

- [1 CONCEPTRONIC USB Print Server](#)
- [2 Short Description](#)
- [3 Description](#)
- [4 Additional Information](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)




CONCEPTRONIC USB Print Server



Short Description

USB Printer Server for network printer sharing USB 2.0 interface Easy setup via user-friendly interface Supports various network printing protocols Supports different operating systems

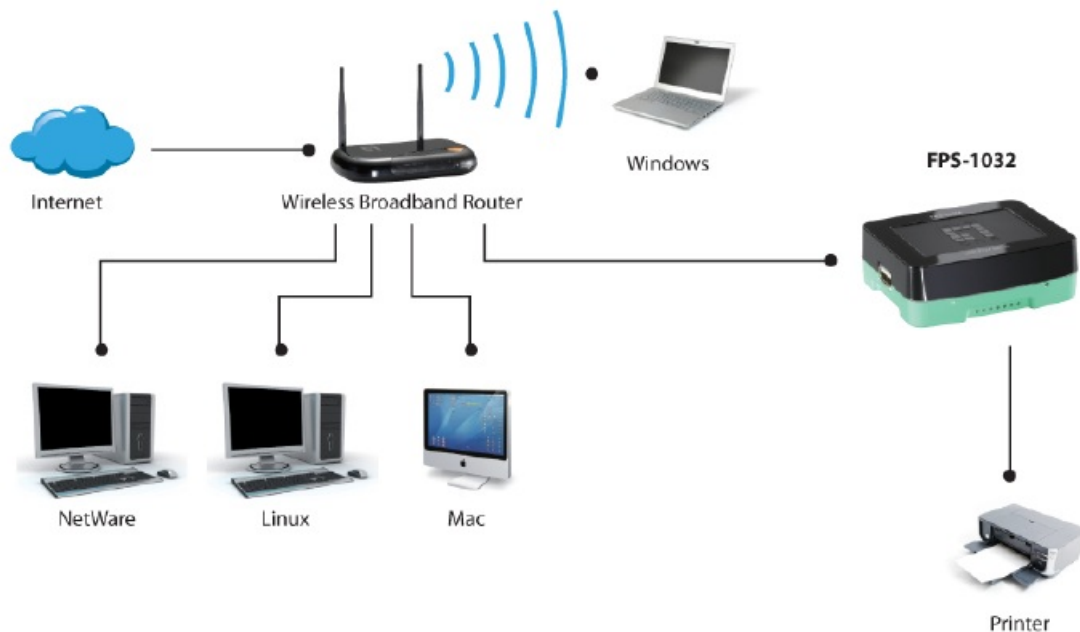

Description

Product Overview The LevelOne FPS-1032 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network. This print server is equipped with a 10/100Mbps autosensing Ethernet port and a USB 2.0 port that is connected to a USB printer.

Multi-OS and Network Printing Protocol Support The FPS-1032 1-port USB print server supports Windows ME/NT/2000/XP/2003/Vista and Win7 operating systems as well as Mac OS 8.1 and higher, UNIX/Linux and Netware (Bindery/NDS). Network Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR, and SMB over TCP/IP for flexible use with different network clients connected to the same office network. The FPS-1032 also includes Internet Printing Protocol (IPP) support and Windows Print Monitor Technology to monitor printing jobs received.

Easy Installation Wizard The LevelOne FPS-1032 is easily configurable using a Web Browser or Windows-based configuration program included with the CD-ROM. The print server is easily managed through a Web-based user interface and the firmware is upgradeable through TFTP, the windows set-up program or the Web-based user interface.

Additional Information

- **Zulassungen und Konformität** CE, FCC
- **Max. Luftfeuchtigkeit im Betrieb (%)** 70
- **Max. Betriebstemperatur in °C** 45
- **Max. Luftfeuchtigkeit bei Lagerung (%)** 80
- **Max. Lagertemperatur in °C** 65
- **Min. Lagertemperatur in °C** -5
- **Unterstützte Betriebssysteme** Windows ME/NT/2000/XP/2003/Vista/Win7 Mac OS 8.1 and higher UNIX/Linux and Netware (Bindery/NDS).
- DC-Start Ja
- Indikator LAN LED USB LED
- Arbeitsspeichergröße 16 Mbytes DDR2
- Flash-Speichergröße 2 Mbytes
- Stromversorgung Power adapter
- Standards IEEE 802.3, 802.3u Ethernet Standards

- Grundfunktionen Network Print Protocol Support : LPR,RAW TCP,IPP,SMB
- AppleTalk Netware Bindery/NDS Print Monitor printing
- **Produktgewicht (kg)** 0,52
- **Produktbreite (mm)** 64,8
- **Produkttiefe (mm)** 73,2
- **Produkthöhe (mm)** 24,9
- **Farbe** Black
- **EAN** 4015867142233
- **Modellnummer** FPS-1032
- **Lieferumfang** FPS-1032 Netzadapter Quick Installation Guide Ressource CD (Bedienungsanleitung, Hilfsprogramm, QIG)
- **Fast-Ethernet RJ45** 1



Documents / Resources

	CONCEPTRONIC USB Print Server [pdf] Instructions USB Print Server, Print Server, Server
---	--