



Control iD iDUHF Access Controller with UHF Reader Owner's Manual

[Home](#) » [Control iD](#) » Control iD iDUHF Access Controller with UHF Reader Owner's Manual 

Contents

- [1 Control iD iDUHF Access Controller with UHF Reader](#)
- [2 INTRODUCTION](#)
- [3 TECHNICAL SPECIFICATIONS](#)
- [4 GENERAL CHARACTERISTICS](#)
- [5 INTERCONNECTION DIAGRAM](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Control iD

Control iD iDUHF Access Controller with UHF Reader



INTRODUCTION

Control iD brings to the market an equipment with IP65 protection, ideal for monitoring and controlling vehicle access in corporate and residential condominiums. With an integrated UHF reader with a range of up to 15 meters, the iDUHF operates as an independent device that provides both the reading and authentication of vehicle tags, as well as the control of the external motor drive board. Its storage capacity is up to 200,000 users and, through the embedded web software, it is possible to configure the product, customize access rules and generate specific reports in a simple and intuitive way.

- Reading and authentication of tags on the device
- Access rules and customizable reports
- Stores up to 200,000 users
- IP65 Protection
- Controls motor drive board
- Embedded software and TCP/IP communication

TECHNICAL SPECIFICATIONS

ACCESS CONTROL

- **Number of Users**
More than 200,000 registered users
- **Access Rules**
Access rules according to schedules and departments
- **Access Records**
Capacity for over 200,000 records

COMMUNICATION

- **Ethernet**
1 native 10/100Mbps Ethernet port
- **RS-485**

1 native RS-485 port with 120 Ohm termination

- **RS-232**

1 native RS-232 port

- **Output Relay**

1 relay up to 30VAC / 5A

- **Wiegand Output**

1 native output

- **Additional Inputs**

Trigger and Door Sensor Inputs

IDENTIFICATION METHODS

- **UHF Reader**

Reading distance up to 15m, depending on the tag used and the antenna installation conditions

USER INTERFACE

- **Integrated Web Software**

Complete access control management from your browser

GENERAL CHARACTERISTICS

- **General Dimensions**

- 420 mm x 420 mm x 60 mm (W x H x D) – Antena
- 52 mm x 52 mm x 22 mm (W x H x D) – External Drive Module

- **Equipment Weight**

- 2270g – Antena
- 35g – External Access Control Module

- **Power Input**


External 12V power supply (not included)

- **Total Consumption**


3,5W (300mA) rated

INTERCONNECTION DIAGRAM

iDUHF as Access Controller

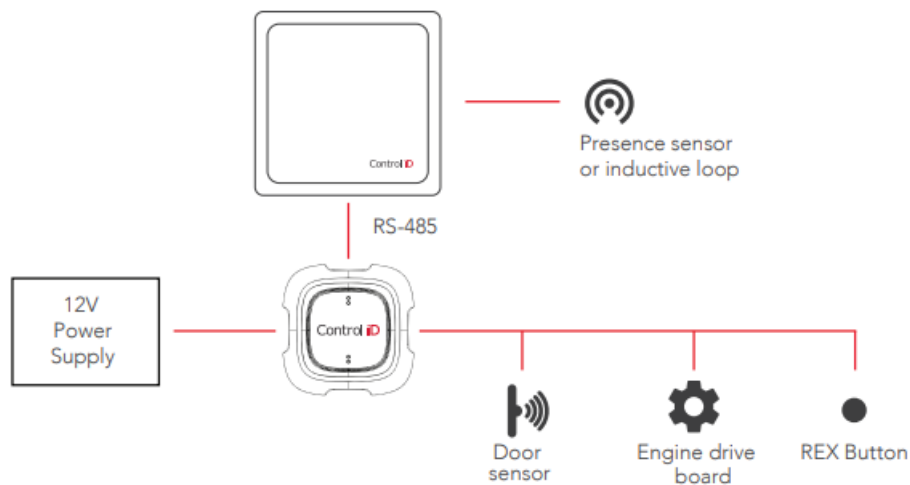

iDUHF as UHF Reader (Wiegand)

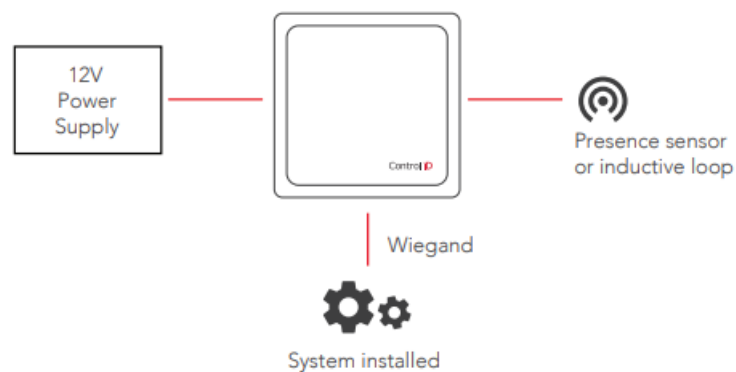

www.controlid.com.br/en

Documents / Resources

	<p>Control iD iDUHF Access Controller with UHF Reader [pdf] Owner's Manual iDUHF Access Controller with UHF Reader, iDUHF, iDUHF UHF Reader, Access Controller with UHF Reader, UHF Reader, Access Controller</p>
	<p>Control iD iDUHF Access Controller [pdf] User Guide iDUHF Access Controller, Access Controller, iDUHF Controller, Controller, iDUHF</p>

References

- [iD Time Attendance, Access Control and Commercial Automation | Control iD](#)
- [iD Controle de Acesso iDUHF | Control iD](#)

