Control4 CORE1 Hub and Controller Installation Guide

Home » Control4 » Control4 CORE1 Hub and Controller Installation Guide 🖺



Contents

- 1 Control4 CORE1 Hub and Controller
- 2 Introduction
- 3 Box contents
- 4 Accessories available for purchase
- **5 Requirements and specifications**
- **6 Specifications**
- 7 Additional resources
- 8 view
 - 8.1 Front view
 - 8.2 Back view
- 9 Installation instructions
- 10 Troubleshooting
- 11 LED status information
- 12 More help
- 13 Important Safety Instructions
- 14 USA & Canada Compliance
- 15 Documents / Resources
 - 15.1 References
- **16 Related Posts**



Control4 CORE1 Hub and Controller



Supported models

Control4 Core-1 Hub & Controller

Introduction

Designed for an exceptional family room entertainment experience, the Control4® CORE-1 Controller does more than automate the gear around your TV; it is the ideal smart home starter system with entertainment built in. The CORE-1 delivers a beautiful, intuitive, and responsive on-screen user interface with the ability to create and enhance the entertainment experience for any TV in the house. The CORE-1 can orchestrate a wide range of entertainment devices including Blu-ray players, satellite or cable boxes, game consoles, TVs, and virtually any product with infrared (IR) or serial (RS-232) control. It also features IP control for Apple TV, Roku, televisions, AVRs, or other network-connected devices, as well as secure wireless ZigBee control for lights, thermostats, smart locks, and more.

For entertainment, the CORE-1 also includes a built-in music server that allows you to listen to your own music library, stream from a variety of leading music services, or from your AirPlay-enabled devices using Control4 ShairBridge technology.

Box contents

The following items are included in the CORE-1 controller box:

- CORE-1 controller
- AC power cord
- IR emitters (4)
- External antennas (1)

Accessories available for purchase

- CORE-1 Wall-Mount Bracket (C4-CORE1-WM)
- Rack Mount Kit (C4-CORE1-RMK)
- Control4 3-Meter Wireless Antenna Kit (C4-AK-3M)
- Control4 Dual-Band WiFi USB Adapter (C4-USBWIFI OR C4-USBWIFI-1)
- Control4 3.5 mm to DB9 Serial Cable (C4-CBL3.5-DB9B)

Requirements and specifications

Note: We recommend using Ethernet instead of WiFi for the best network connectivity.

Note: The Ethernet or WiFi network should be installed before starting the CORE-1 controller installation.

Note: The CORE-1 requires OS 3.3 or newer.

Composer Pro software is required to configure this device. See the Composer Pro User Guide (ctrl4.co/cpro-ug) for details.

Warnings

Caution! To reduce the risk of electrical shock, do not expose this apparatus to rain or moisture. **Caution!** In an over-current condition on USB, the software disables the output. If the attached USB device does not appear to power on, remove the USB device from the controller.

Specifications

	Inpute / Outpute
	Inputs / Outputs
Video out	1 video out—1 HDMI
Video	HDMI 2.0a; 3840×2160 @ 60Hz; HDCP 2.2 and HDCP 1.4
Audio out	1 audio out—1 HDMI or digital audio
Audio playback formats	AAC, AIFF, ALAC, FLAC, M4A, MP2, MP3, MP4/M4A, Ogg Vorbis , PCM, WAV, WMA
High-resolution audio playback	Up to 192 kHz / 24 bit
	Network
Ethernet	10/100/1000BaseT compatible (required for controller setup)
Wi-Fl	Available with USB Wi-Fi adapter
ZigBee Pro	802.15.4
ZigBee antenna	External reverse SMA connector
USB port	1 USB 3.0 port—500mA
	Control
IR out	4 IR out—5V 27mA max output
IR capture	1 IR receiver—front, 20-60 KHz
Serial out	2 serial out (shared with IR out 1 and 2)
	Power
Power requirements	100-240 VAC, 60/50Hz
Power consumption	Max: 18W, 61 BTUs/hour Idle: 9W, 30 BTUs/hour
Other	
Operating temperature	32°F × 104°F (0°C × 40°C)
Storage temperature	4°F × 158°F (-20°C × 70°C)
Dimensions (H × W × D)	1.16 × 7.67 × 5.2" (29.5 × 195 × 132 mm)
Weight	1.5 lb (0.68 kg)
Shipping weight	2.3 lb (1.04 kg)
	1


Additional resources

The following resources are available for more support.

- Control4 CORE series help and information: co/core
- Snap One Tech Community and Knowledgebase: control4.com
- · Control4 Technical Support
- Control4 website: control4.com


view

Front view

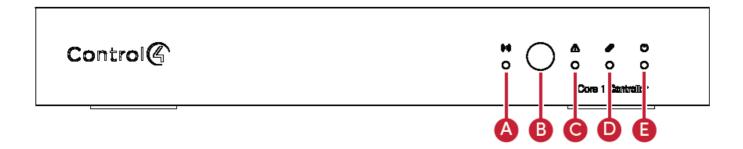

- A Activity LED—The Activity LED shows when the controller is streaming audio.
- B IR window—IR receiver for learning IR codes.
- C Caution LED—This LED shows solid red, then blinks blue during the boot process.
 Note: The Caution LED blinks orange during the factory restore process. See "Reset to factory settings" in this document.
- **D** Link LED—The LED indicates that the controller has been identified in a Control4 Composer project and is communicating with Director.
- E Power LED—The blue LED indicates that AC power is present. The controller turns on immediately after power is applied to it.

Back view

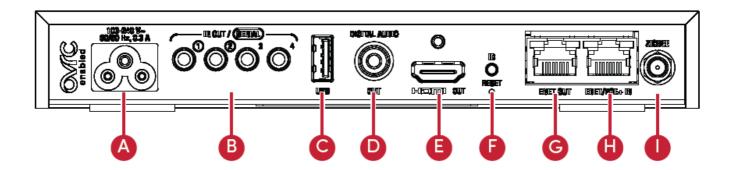

- A Power port—AC power connector for an IEC 60320-C5 power cord.
- **B** SERIAL and IR OUT—3.5 mm jacks for up to four IR emitters or for acombination of IR emitters and serial devices. Ports 1 and 2 can be configured independently for serial control (for controlling receivers or disc changers) or for IR control. See "Connecting the IR ports/serial ports" in this document for more information.
- C USB—One port for an external USB drive (such as a USB stick formatted FAT32). See "Setting up external storage devices" in this document.

- **D** DIGITAL AUDIO—Outputs audio (AUDIO OUT) shared from other Control4 devices or from digital audio sources (local media or digital streaming services).
- E HDMI OUT—An HDMI port to display navigation menus. Also an audio out over HDMI.
- F ID button and RESET—ID button is pressed to identify the device in Composer Pro.
 The ID button on the CORE-1 is also an LED that displays feedback useful in a factory restore. The RESET pinhole is used to reset or factory restore the controller.
- G ENET OUT—RJ-45 jack for Ethernet out connection. Acts as a 2-port network switch with ENET/POE+ IN
 jack.
- **H** ENET/POE+ IN—RJ-45 jack for a 10/100/1000BaseT Ethernet connection. Also can power the controller with PoE+.
- I ZIGBEE—Antenna for the ZigBee radio.

Installation instructions

To install the controller:

- 1. Ensure that the home network is in place before starting system setup. An Ethernet connection to the local network is required for setup. The controller requires a network connection to use all of the features as designed. After initial configuration, Ethernet (recommended) or Wi-Fi (with an optional adapter) can be used to connect the controller to web-based media databases, communicate with other IP devices in the home, and access Control4 system updates.
- 2. Mount the controller near the local devices you need to control. The controller can be hidden behind a TV, mounted on a wall, placed in a rack, or stacked on a shelf. The CORE-1 Wall-Mount Bracket is sold separately and designed for easy installation of the CORE-1 controller behind a TV or on the wall.
- 3. Attach antennas to the ZIGBEE antenna connectors.
- 4. Connect the controller to the network.
 - Ethernet—To connect using an Ethernet connection, connect the network cable into the controller's RJ-45 port (labeled "Ethernet") and into the network port on the wall or at the network switch.
 - Wi-Fi—To connect using Wi-Fi, first connect the unit to Ethernet, connect the
 Wi-Fi adapter to the USB port, and then use Composer Pro System Manager to reconfigure the unit for WiFi.
- 5. Connect system devices. Attach IR and serial devices as described in "Connecting the IR ports/serial ports" and "Setting up IR emitters."
- 6. Set up any external storage devices as described in "Setting up external storagedevices" in this document.
- 7. If using AC power, connect the power cord to the controller's power port and then into an electrical outlet.

Connecting the IR ports/serial ports (optional)

The controller provides four IR ports, and ports 1 and 2 can be reconfigured independently for serial communication. If not used for serial, they can be used for IR. Connect a serial device to the controller using the Control4 3.5 mm-to-DB9 Serial Cable (C4-CBL3.5-DB9B, sold separately).

- 1. The serial ports support baud rates between 1200 to 115200 baud for odd and even parity. The serial ports do not support hardware flow control.
- 2. See Knowledgebase article #268 (dealer.control4.com/dealer/knowledgebase/ article/268) for pinout diagrams.

3. To configure a port for serial or IR, make the appropriate connections in your project using Composer Pro. See the Composer Pro User Guide for details.

Note: The serial ports can be configured as straight-through or null with Composer Pro. Serial ports by default are configured straight-through and can be changed in Composer by selecting Enable Null-Modem Serial Port (1 or 2).

Setting up IR emitters

Your system may contain third-party products that are controlled through IR commands.

- 1. Connect one of the included IR emitters to an IR OUT port on the controller.
- 2. Place the stick-on emitter end onto the IR receiver on the Blu-ray player, TV, or other target device to drive IR signals from the controller to the targets.

Setting up external storage devices (optional)

You can store and access media from an external storage device, for example, a network hard drive or USB memory device, by connecting the USB drive to the USB port and configuring or scanning the media in Composer Pro.

Note: We support only externally powered USB drives or solid state USB sticks. Self-powered USB drives are not supported.

Note: When using USB storage devices on an CORE-1 controller, you can useonly one partition with a 2 TB maximum size. This limitation also applies to the USB storage on other controllers.

Composer Pro driver information

Use Auto Discovery and SDDP to add the driver to the Composer project. See the Composer Pro User Guide (ctrl4.co/cpro-ug) for details.

OvrC setup and configuration

OvrC gives you remote device management, real-time notifications, and intuitive customer management, right from your computer or mobile device. Setup is plug-and-play, with no port forwarding or DDNS address required.

To add this device to your OvrC account:

- 1. Connect CORE-1 controller to the Internet.
- 2. Navigate to OvrC (www.ovrc.com) and log in to your account.
- 3. Add the device (MAC address and Service Tag numbers needed for authentication).

Troubleshooting

Reset to factory settings

Caution! The factory restore process will remove the Composer project.

To restore the controller to the factory default image:

- 1 Insert one end of a paper clip into the small hole on the back of the controller labeled RESET.
- 2 Press and hold the RESET button. The controller resets and the ID button changes to solid red.

3 Hold the button until the ID flashes double orange. This should take five to seven seconds. The ID button flashes orange while the factory restore is running. When complete, the ID button turns off and the device power cycles one more time to complete the factory restore process.

Note: During the reset process, the ID button provides the same feedback as the Caution LED on the front of the controller.

Power cycle the controller

1. Press and hold the ID button for five seconds. The controller turns off and back on.

Reset the network settings

To reset the controller network settings to the default:

- 1. Disconnect power to the controller.
- 2. While pressing and holding the ID button on the back of the controller, power on the controller.
- 3. Hold the ID button until ID button turns solid orange and the Link and Power LEDs are solid blue, and then immediately release the button.

Note: IDuring the reset process, the ID button provides the same feedback as the Caution LED on the front of the controller.

LED status information



- · Just powered on
- · Bootloader loaded
- Kernel loaded
- Network reset check
- · Factory restore underway
- · Factory restore fail
- · Connected to Director
- · Playing audio

More help

For the latest version of this document and to view additional materials, open the URL below or scan the QR code on a device that can view PDFs.







Regulatory Compliance & Safety Information for Model C4-CORE1 Electrical Safety Advisory

Important Safety Instructions

Read the safety instructions before using this product.

- 1. Read these instructions
- 2. Keep these instructions.
- 3. Heed all warnings.
- 4. Follow all instructions.
- 5. Do not use this apparatus near water.
- 6. Clean only with dry cloth.
- 7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- 8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- 9. Only use attachments/accessories specified by the manufacturer.
- 10. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- 11. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug isdamaged, liquid has been spilled or objects have fallen into the apparatus, the apparatushas been exposed to rain or moisture, does not operate normally, or has been dropped.
- 12. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 13. This equipment uses AC power which can be subjected to electrical surges, typicallylightning transients which are very destructive to customer terminal equipment connected to AC power sources. The warranty for this equipment does not cover damage caused by electrical surge or lightning transients. To reduce the risk of this equipment becoming damaged it is suggested that the customer consider installing a surge arrestor. Unplugthis apparatus during lightning storms or when unused for long periods of time.
- 14. To completely disconnect unit power from the AC mains, remove the power cord from theappliance coupler and/or turn off the circuit breaker. To reconnect power, turn on thecircuit breaker following all safety instructions and guidelines. The circuit breaker shallremain readily accessible.

- 15. This product relies on the buildings installation for short-circuit (overcurrent) protection. Ensure that the protective device is rated not greater than: 20A
- 16. WARNING Power Sources, Grounding, Polarization

This product requires a properly grounded outlet for safety. This plug is designed to be inserted into a NEMA 5-15 (three-prong grounded) outlet only. Do not force the plug into an outlet that is not designed to accept it. Never dismantle the plug or alter the power cord, and do not attempt to defeat the grounding feature by using a 3-to-2 prong adapter. If you have a question about grounding, consult your local power company or qualified electrician.

If a rooftop device such as a satellite dish connect to the product, ensure that the devices' wires are also properly grounded.

The bonding point can be used to provide a common ground to other equipment. This bonding point can accommodate minimum 12 AWG wire and should be connected using the required hardware specified by the other bonding point. Please use termination for your equipment in accordance with the applicable local agency requirements.

- 17. Notice For indoor use only, Internal components are not sealed from the environment. The device can only be used in a fixed location such as a telecommunication center, or adedicated computer room. When you install the device, ensure that the protective earthing connection of the socket-outlet is verified by a skilled person. Suitable for installation in information technology rooms in accordance with Article 645 of the National Electrical Code and NFP 75.
- 18. This product can interfere with electrical equipment such as tape recorders, TV sets,radios, computers, and microwave ovens if placed in close proximity.
- 19. Never push objects of any kind into this product through cabinet slots as they may touchdangerous voltage points or short out parts that could result in fire or electric shock.
- 20. WARNING No user serviceable parts inside. If the product is not operating properly, do not remove any part of the unit (cover, etc.) for repair. Unplug the unit and consult the warranty section of the owner's manual.
- 21. CAUTION: As with all batteries, there is a risk of explosion or personal injury if the battery is replaced by an incorrect type. Dispose of used battery according to the instructions of the battery manufacturer and applicable environmental guidelines. Do not open, puncture or incinerate the battery, or expose it to conducting materials, moisture, liquid, fire or heat above 54° C or 130° F.
- 22. PoE considered a Network Environment 0 per IEC TR62101, and thus the interconnected ITE circuits may be considered ES1. The installation instructions clearly state that the ITE is to be connected only to PoE networks without routing to the outside plant.

USA & Canada Compliance

FCC Part 15, Subpart B & IC Unintentional Emissions Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

· Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference,
- 2. this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT! Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

FCC Part 15, Subpart C / RSS-247 Intentional Emissions Interference Statement

Compliance of this equipment is confirmed by the following certification numbers that are placed on the equipment:

Notice: The term "FCC ID:" and "IC:" before the certification number signifies that FCC and Industry Canada technical specifications were met.

FCC ID: 2AJAC-CORE1 IC: 7848A-CORE1

This equipment must be installed by qualified professionals or contractors in accordance with FCC Part 15.203 & IC RSS-247, Antenna Requirements. Do not use any antenna other than the one provided with the unit. Operations in the 5.15-5.25GHz band are restricted to indoor usage only.

Caution:

- 1. the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- 2. the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate;
- 3. Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

RF Radiation Exposure Statement

This equipment complies with FCC RF and IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 10 centimeters between the radiator and your body or nearby persons.

Europe Compliance

Compliance of this equipment is confirmed by the following logo that is placed on the product ID label that is placed on the bottom of the equipment. The full text of the EU Declaration of Conformity (DoC) is available on the regulatory webpage:

This product can be put into service in all of the EU member states, European Free Trade Association (EFTA) and EU candidate countries without any restriction.

The frequency and maximum transmitted power in EU are listed as below:

2412 – 2472 MHz: ?\$ dBm 5180 – 5240 MHz: ?\$ dBm

WLAN 5GHz:

Operations in the 5.15-5.35GHz band are restricted to indoor usage only.

United Kingdom (UK) Compliance

Compliance of this equipment is confirmed by the following logo that is placed on the product ID label that is placed on the bottom of the equipment. The full text of the UK Declaration of Conformity (DoC) is available on the regulatory webpage:

Recycling

Snap One understands that a commitment to the environment is essential for a health life and sustainable growth for future generations. We are committed to supporting the environmental standards, laws, and directives that have been put in place by various communities and countries that deal with concerns for the environment. This commitment is represented by combining technological innovation with sound environmental business decisions.

WEEE Compliance

Snap One is committed to meeting all requirements of the Waste Electrical and Electronic Equipment (WEEE) directive (2012/19/EC). The WEEE directive requires the manufacturers of electrical and electronic equipment who sell in EU countries: (1) label their equipment to notify customers that it needs to be recycled, and (2) provide a way for their products to be appropriately disposed of or recycled at the end of their product lifespan. For collection or recycling of Snap One products, please contact your local Snap One representative or dealer.

Australia & New Zealand Compliance

Compliance of this equipment is confirmed by the following logo that is placed on the product ID label that is placed on the bottom of the equipment.

About this Document

Copyright © 2022 Snap One All rights reserved. 1800 Continental Blvd. Suite 200 • Charlotte, NC 28273 866-424-4489 • snapone.com

Documents / Resources



Control4 CORE1 Hub and Controller [pdf] Installation Guide CORE1, 2AJAC-CORE1, 2AJACCORE1, Hub and Controller, CORE1 Hub and Controller

References

- Home Automation and Smart Home Control | Control4
- Ctrl4.co/core
- Get Latest By Product | Docs
- Get Latest By Product | Docs

- Snap One
- S Policies
- <u>4 tech.control4.com</u>
- Control4 Smart Homes
- Management for Residential & IT Integrators

Manuals+,