



COOSPO BK467 Cadence Sensor Speed For Professional Cycling User Manual

[Home](#) » [COOSPO](#) » COOSPO BK467 Cadence Sensor Speed For Professional Cycling User Manual 




Cadence Sensor Speed For Professional Cycling
User Manual


Contents

- [1 Standard Accessories](#)
- [2 Product Introduction](#)
- [3 Remove the Insulation Sheet](#)
- [4 Function and Operation](#)
- [5 Specifications](#)
- [6 Applicable Smart Phones](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)


Standard Accessories



Speed / Cadence
Sensor x 1



Rubber Mat
(Flat x 1, Curved x 1)



Band
(Large x 2, Medium x 2,
Small x 2)




User Manual x 1

Product Introduction

BK467 measures speed or cadence in real-time and it sends speed or cadence data to app or bike computers. This user manual will help you to use the product better, please keep it for reference.

Remove the Insulation Sheet

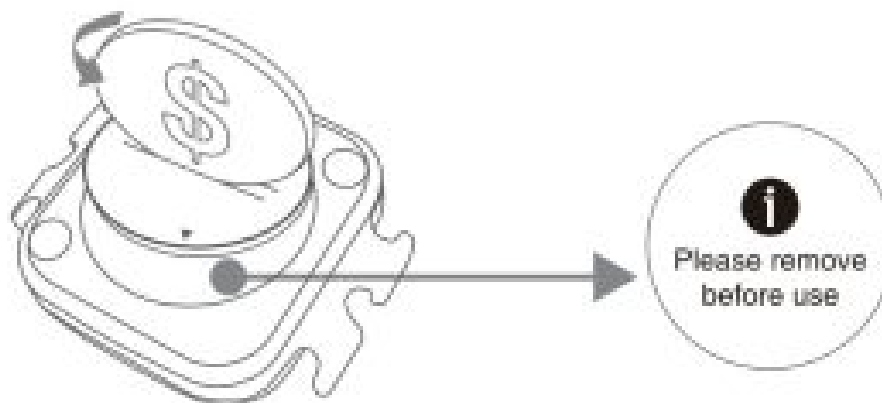

1. Twist the battery cover with a coin in an OPEN direction, open the battery cover, remove the battery
2. Take out the insulating sheet

Function and Operation


BK467 has speed mode and cadence mode. You can switch the mode by rebooting.

Mode switching

a. Twist the battery cover with a coin in the OPEN direction, open the battery cover, remove the battery and install it again, after that, twist the battery cover in the CLOSE direction, close the battery cover.




b. After the battery is installed, there will be a light on. Red light indicates speed mode, and a blue light indicates cadence mode.

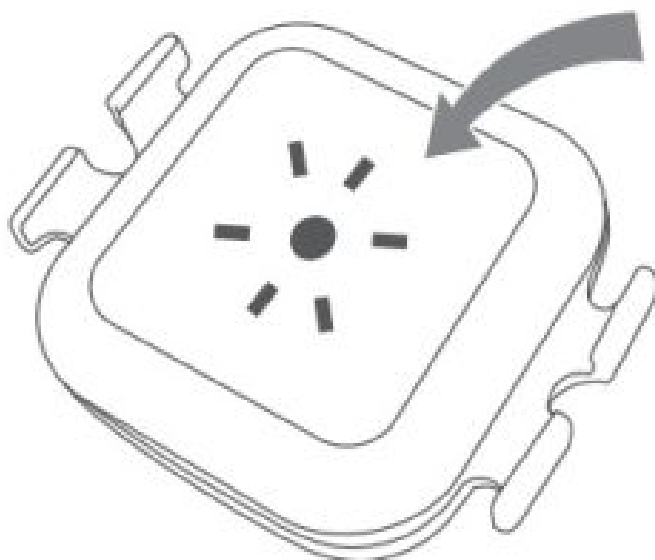

Installation


a. Installation for speed mode

Buckle the curved rubber mat onto the back of the sensor, then bind the sensor with the large rubber band onto the wheel axle.

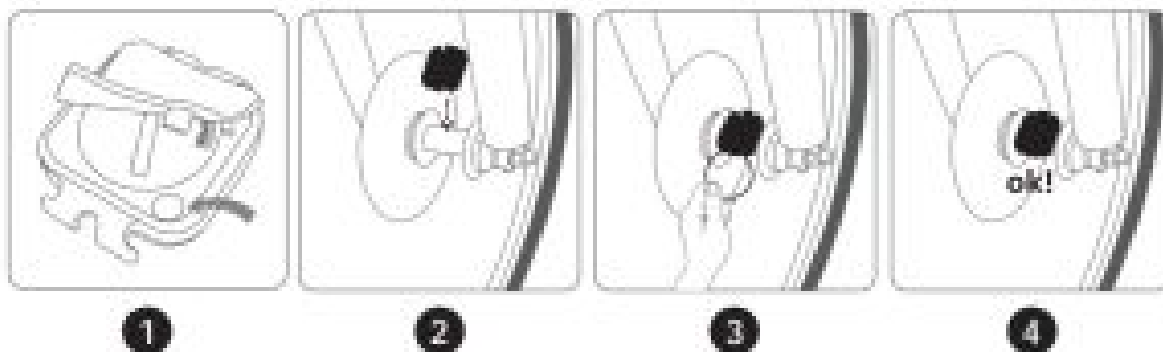

b. Installation for cadence mode

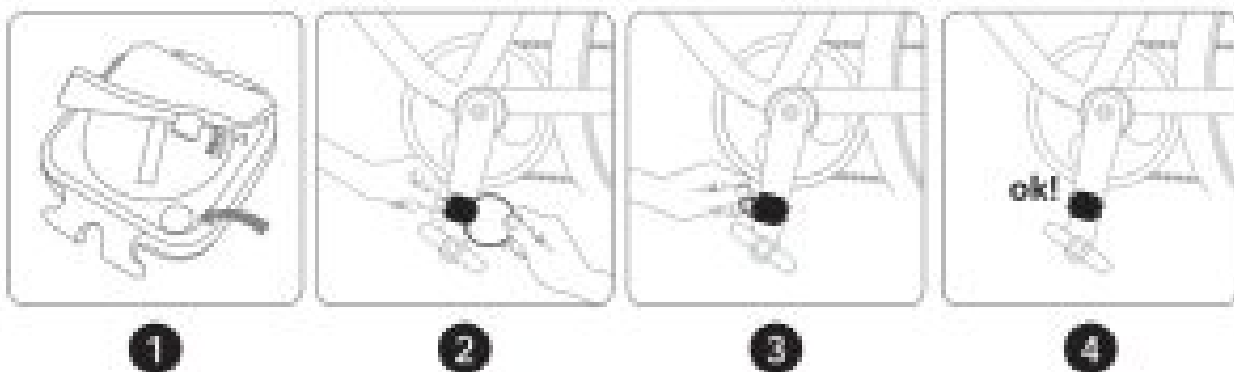

Buckle the flat rubber mat onto the back of the sensor, then bind the sensor with the small rubber band onto the pedal crank.



Specifications

Weight	9.5 g
Battery Life	300 hours
Battery Type	CR2032 220mAh
Waterproof	IP67
Wireless	Bluetooth & ANT+
Size	41x 34x10mm
Max Speed	120 km/h
Max Cadence	300 rpm
Working Temperature	-10°C -. 50°C
Color	Black

Applicable Smart Phones

	iOS 7.0 or above, iPhone 4s model or above
	Android 4.3 or above with Bluetooth 4.0



Compatible Apps

CoospoRide, Wahoo, Openrider, Zwift, MAP MY RIDE+, or other Apps with speed/cadence feature.

Disclaimer

- The information contained in this manual is just for reference. The product described above may be subject to alteration owing to the manufacturer's continuing research and development plans, without making an announcement in advance.
- We shall not make any statement or warranty about this manual.

Documents / Resources

	<p>COOSPO BK467 Cadence Sensor Speed For Professional Cycling [pdf] User Manual BK467, Cadence Sensor Speed For Professional Cycling</p>
	<p>COOSPO BK467 Cadence Sensor Speed for Professional Cycling [pdf] User Manual BK467, Cadence Sensor Speed for Professional Cycling, BK467 Cadence Sensor Speed for Professional Cycling</p>