



CORSTON Harper Pull Handle Installation Guide

[Home](#) » [CORSTON](#) » CORSTON Harper Pull Handle Installation Guide 

CORSTON
ARCHITECTURAL DETAIL



Contents

1 Harper Pull Handle


2 Documents / Resources

2.1 References


3 Related Posts

Harper Pull Handle

Single Harper Pull Handle Contents

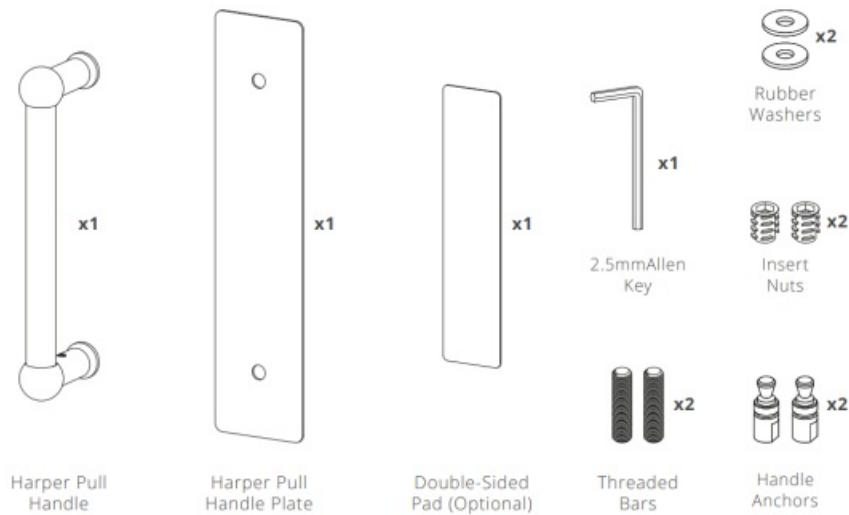


1. Drill the holes

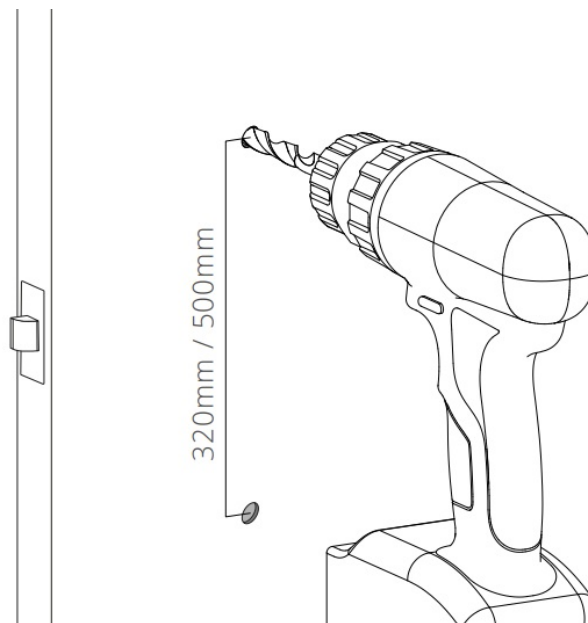


Mark and drill two holes in the timber door using a 10mm drill bit. Masking tape can be used to mark accurate holes and adjust positioning.

2. Insert the nuts

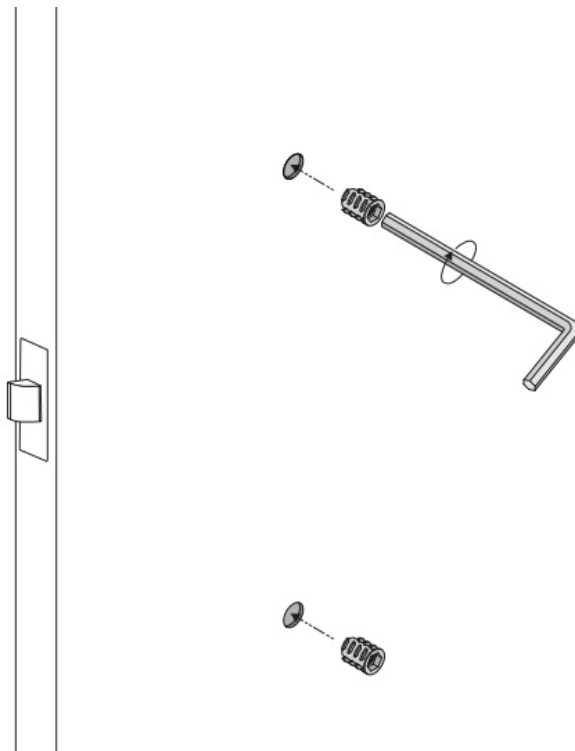


Use an 8mm allen key (not provided) to drive the insert nuts into the holes. Ensure the insert nut is flush with surface.

3. Insert the threaded bars

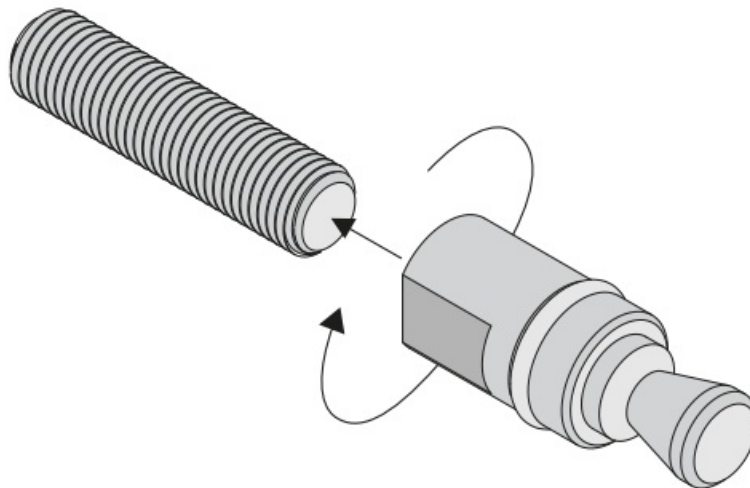


Insert threaded bar all the way into handle anchor.

4. Attach handle anchors (and plate)

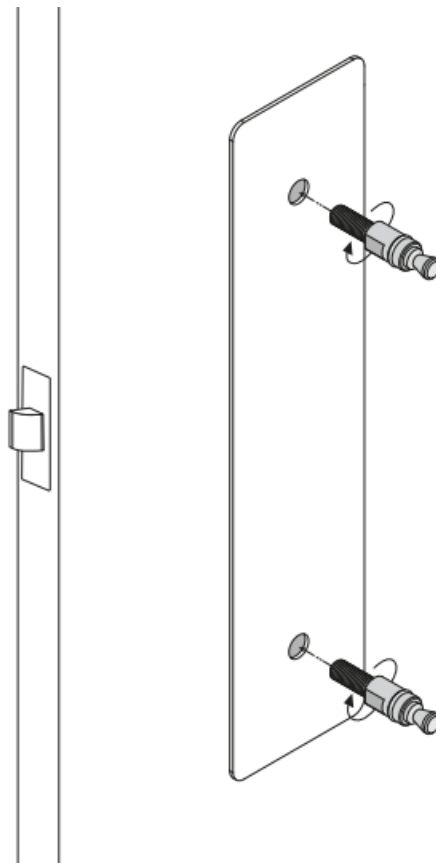


Screw anchors into door over plate and tighten by hand. Use a spanner for more robust doors.

5. Attach the handle

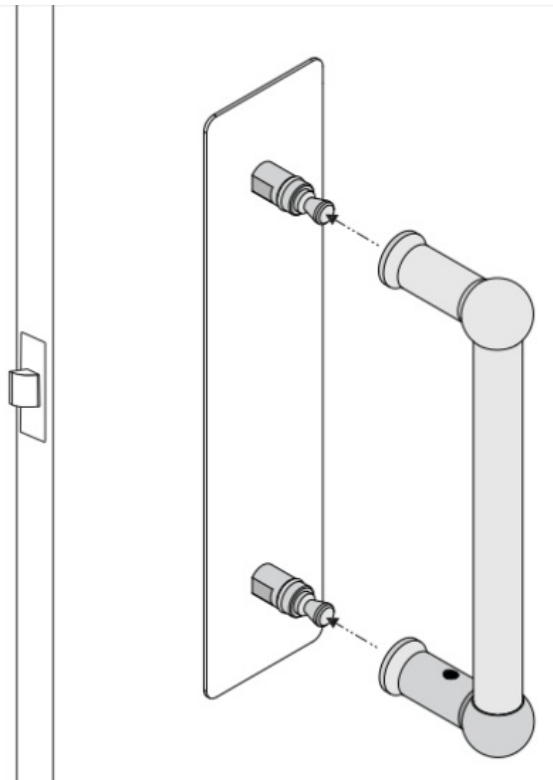

Attach handle to the anchors. Both ends of the handle should be flush with the plate/door

6. Tighten the grub screws

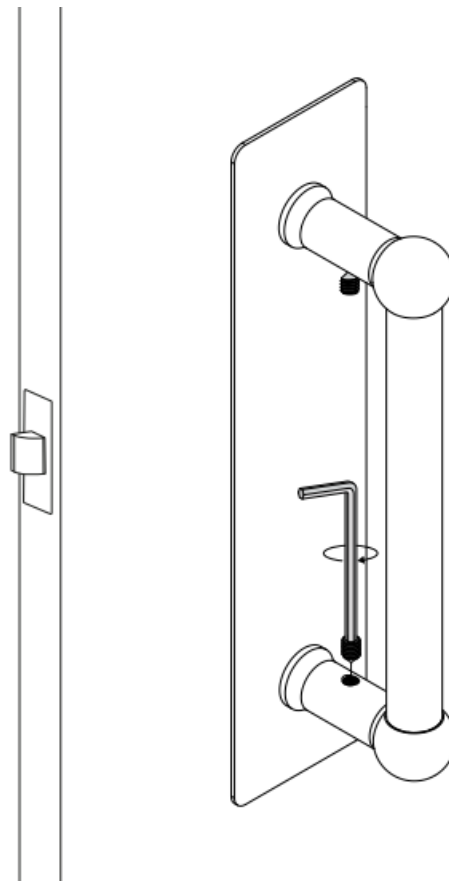


Using the 2.5mm allen key, tighten the two grub screws on the inside of the handle.

Please Note


The double-sided pad can be used to secure the plate to the door. This is to assist with uneven door surfaces. Once attached to the plate, it cannot be removed. Only use if the plate is not stable without it. Rubber washers can be used to protect the door frame but will be visible.

Double Harper Pull Handle

Contents

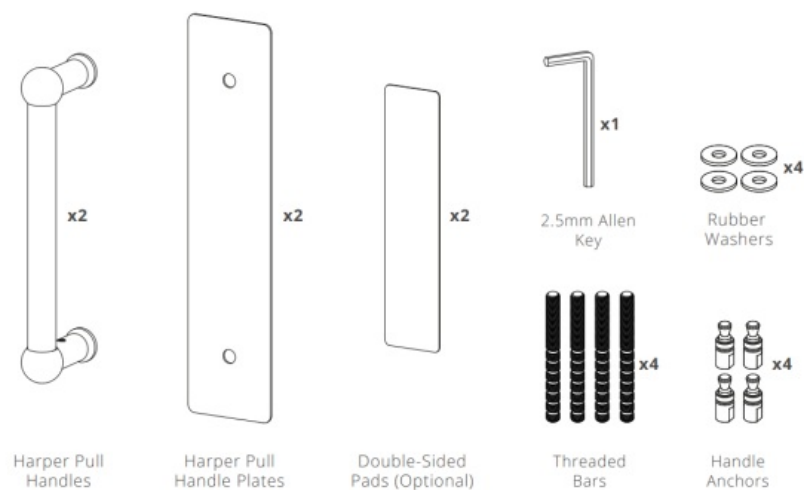


1. Drill the holes

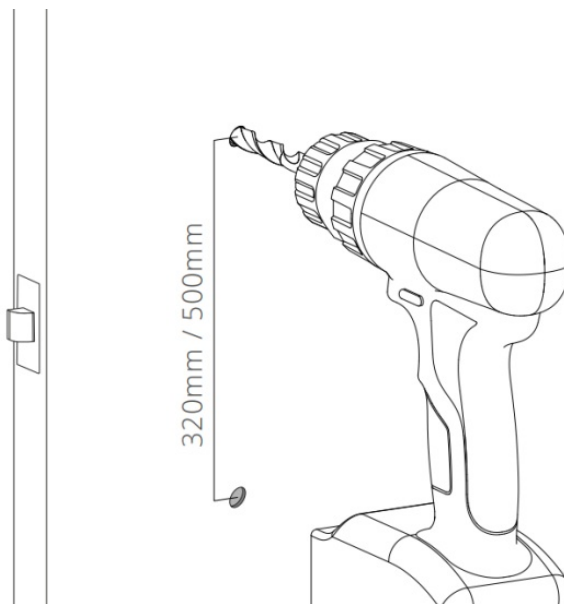


Mark and drill two holes in the timber door using a 10mm drill bit. Masking tape can be used to mark accurate holes and adjust positioning.

2. Insert the threaded bars

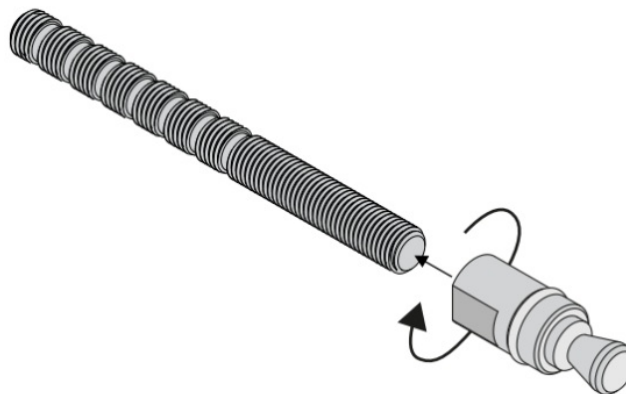


Insert threaded bar all the way into handle anchor.

3. Cut the threaded bars

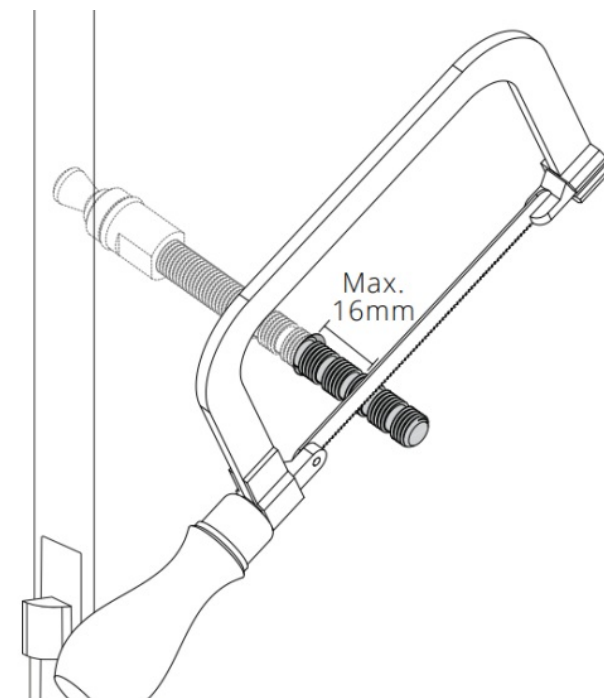


Insert the threaded bar through the door and mark 16mm of thread through the other side. Cut the threaded bar on a thread clearance with a hacksaw.

4. Attach handle anchors (and plates)

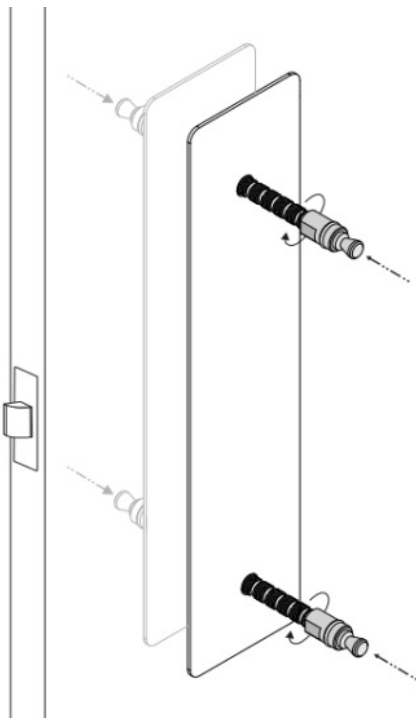


Screw anchors into door over plate and tighten by hand. Use a spanner for more robust doors.

5. **Attach the handles**

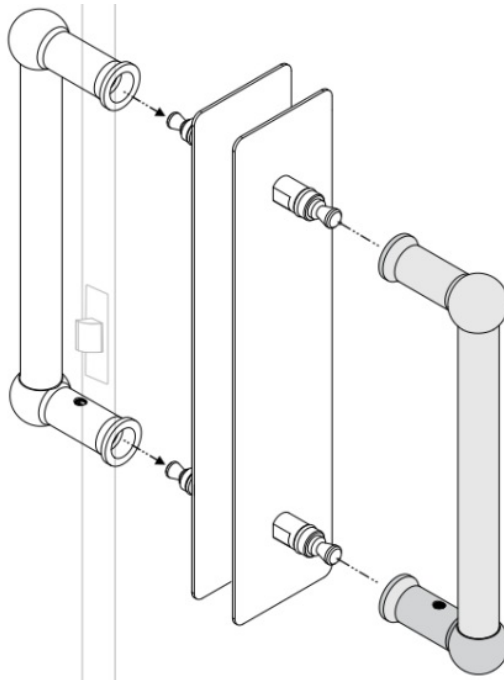

The handle can be attached to the anchors. Both ends of the handle should be flush to the plate or the door

6. **Tighten Grub Screws**

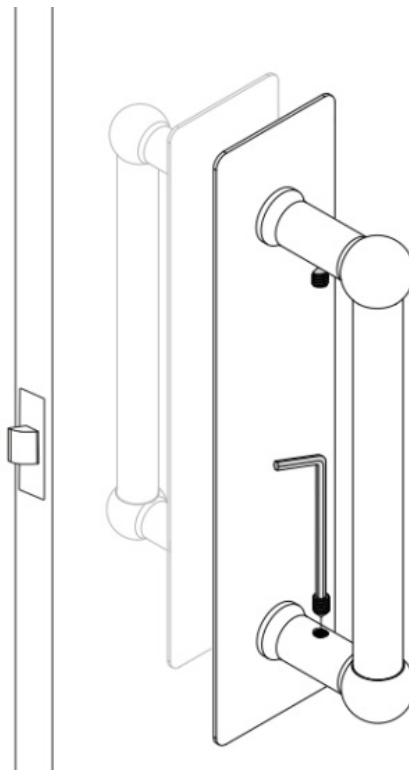


Using the 2.5mm allen key, tighten the four grub screws on the inside of the handle.

Please Note

The double-sided pad can be used to secure the plate to the door. This is to assist with uneven door surfaces. Once attached to the plate, it cannot be removed. Only use if the plate is not stable without it. Rubber washers can be used to protect the door frame but they will be visible. Rubber washers must be used when attaching to glass doors.

corston.ae/support
hello@corston.ae

Documents / Resources



[CORSTON Harper Pull Handle](#) [pdf] Installation Guide
Single Harper Pull Handle, Double Harper Pull Handle 22, Harper Pull Handle, Pull Handle, Handle

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.