




COVERT DOCK HTGC-Dock 10x Smaller than The Original Switch Dock User Manual

[Home](#) » [COVERT DOCK](#) » COVERT DOCK HTGC-Dock 10x Smaller than The Original Switch Dock User Manual



COVERT DOCK HTGC-Dock 10x Smaller than The Original Switch Dock

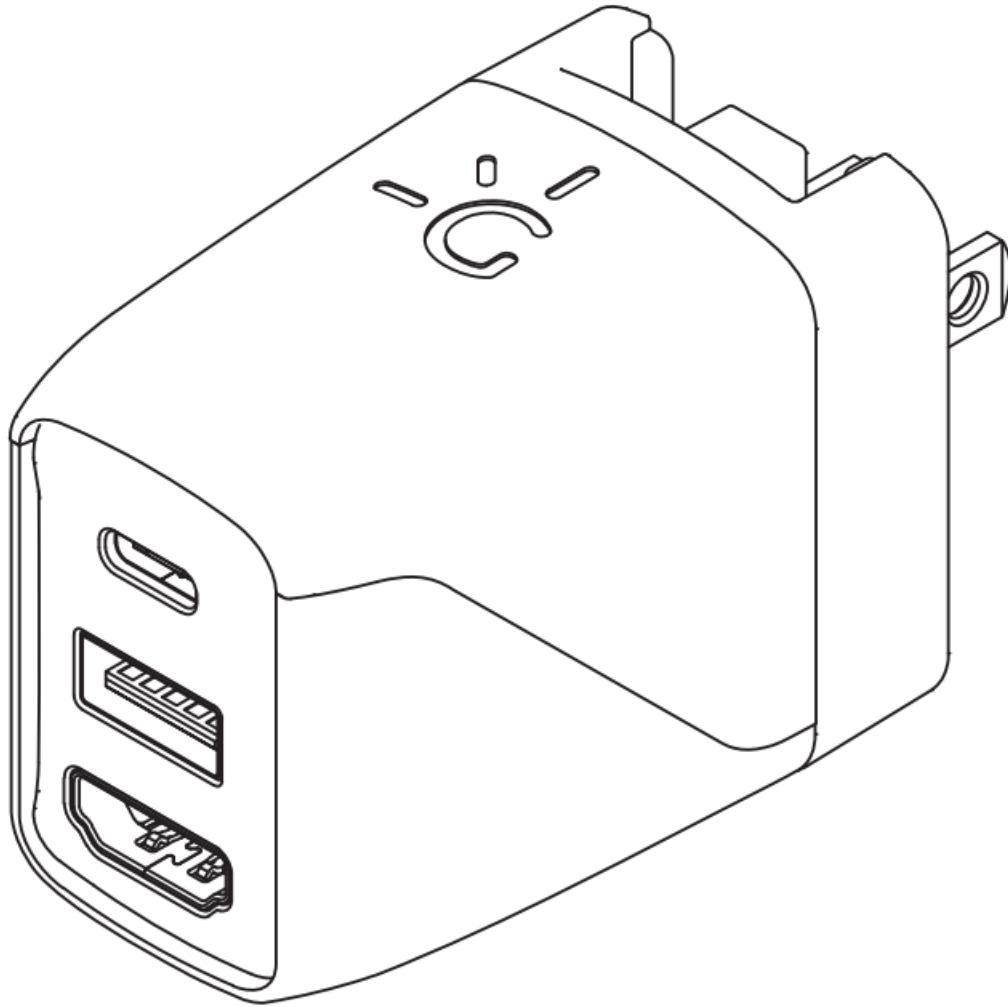


Contents

- [1 What's Inside](#)
- [2 Using the Covert Dock](#)
 - [2.1 SAFETY INFORMATION](#)
- [3 SPECIFICATION](#)
 - [3.1 ONE YEAR LIMITED WARRANTY](#)
 - [3.2 FCC STATEMENT](#)
 - [3.3 IC STATEMENT](#)
 - [3.4 DECLARATION OF CONFORMITY](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

What's Inside

- 1 x Covert Dock Adapter
- 1 x USB Type-C 3.1 Cable (6ft / 1.8m)
- 1 x User Manual (You're looking at it)
- 1 x Global Adapter Set (Optional)

Using the Covert Dock

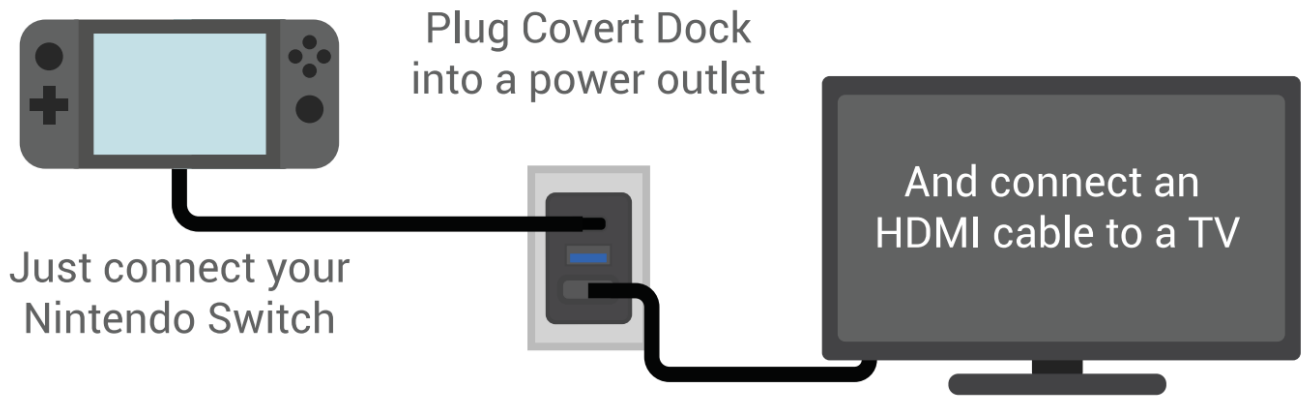

Covert Dock is the most portable way to play your Nintendo Switch on the big screen.

The USB Type-C port can be used for both charging and when an HDMI plug is detected it will broadcast through it.

The USB accessory port connects any USB accessories to what is plugged into the Type-C port, for example Genki Audio, ethernet adapters and wired controllers.

To enable docking to the TV, you must use a USB-C 3.1 cable or above rating for video output and the device must support DisplayPort. For the most reliable experience please use the included USB Type-C cable.

SAFETY INFORMATION

1. This product is intended for home & office use, IT and AV equipment only
2. Do not drop the product, submit it to impact, or pierce it
3. Do not place the product in an area exposed to heat, flame, direct sunlight, dampness, moisture, rain, vibration, shock, dust or sand, excessive vibration or near any kind of magnet
4. The connector of this transformer cannot be replaced
5. The disconnection from line voltage is made by pulling the mains plug
6. The socket-outlet shall be installed near the equipment and shall be easily accessible
7. Use only with high quality, undamaged USB cables and prevent cables from being pinched or damaged
8. A damaged cable or device may malfunction and/or overheat and will be a fire hazard
9. Unplug the product if not used for an extended period of time

SPECIFICATION

Input: 100-240V ~ 0.7A, 50-60Hz Class II

Output: Type A: DC 5V=1 A

Type-C: 5V=2A; 9V=2.44A; 15V=1 .66A

Total Output: 30W

ONE YEAR LIMITED WARRANTY

Devices that are deemed defective when any of the Type-C, USB or the HDMI ports are not functional, scratches

on the shell and other minor shell damages through the course of using are not classified as defects. Therefore they are not replaceable under this condition.

Customer must send the defected device to the return address for replacement, please contact our customer support for the address at genki@humanthings.co

FCC STATEMENT

This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC STATEMENT

This digital device apparatus complies with CAN ICES-3(B) / NMB-3(B)

DECLARATION OF CONFORMITY

Hereby, Human Things Limited declares that the product type A2017 is in compliance with Directive 2014/35/EU and 2014/30/EU and 2016/65/EC. The full text of the EU declaration of conformity is available at the following internet address: <https://www.genkithings.com/pages/user-manual> ©2019 Human Things Limited | Room 2006, Wealth Commercial Centre, 48 Kwong Wa Street, Kowloon, Hong Kong



COVERT DOCK

Documents / Resources

	COVERT DOCK HTGC-Dock 10x Smaller than The Original Switch Dock [pdf] User Manual HTGC-Dock 10x Smaller than The Original Switch Dock, HTGC-Dock, 10x Smaller than The Original Switch Dock, Original Switch Dock
---	--