

COX 2M OBDLTEA1 OBD II Based Vehicle Telemetry and **Location User Manual**

Home » COX 2M » COX 2M OBDLTEA1 OBD II Based Vehicle Telemetry and Location User Manual



Contents

- 1 COX 2M OBDLTEA1 OBD II Based Vehicle Telemetry and Location
- 2 Federal Communication Commission Statement (FCC, U.S.)
- 3 Frequency Table
- **4 Device Specifications**
- **5 Installation Instructions**
- 6 Documents / Resources
- **7 Related Posts**



COX 2M OBDLTEA1 OBD II Based Vehicle Telemetry and Location



Federal Communication Commission Statement (FCC, U.S.)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not

installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1)
 This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radiation Exposure Statement

This device complies with RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This device must operate with a minimum distance of 20 cm between the radiator and user body.

FCC Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment

IC WARNING

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

- 1. This device may not cause interference.
- 2. This device must accept any interference, including interference that may cause undesired operation of the device

Frequency Table


| Chip | SARA-R510M8S | nRF52 |
|-------------------------|--------------------------|---------------|
| Modulation | LTEM: OFDM | BT: GFSK |
| TX Frequency | 600-900MHz, 1700-2100MHz | 2402-2480 GHz |
| Version | CAT M1 | BLE 5 |
| Antenna Gain | 2.5dBi | 2.5dBi |
| Temperature (operating) | -40C to 85C | -30C to 80C |

Device Specifications



| Frequency Bands | LTE Cat M1 bands 1,2,3,4,5,8,12,13,18,19,20,25,26,28 |
|----------------------|---|
| Antenna gain | |
| RF sensitivity | -109 dBm |
| Battery type | Lithium Iron Phosphate Rechargeable – 300mAh |
| Physical security | Proprietary Universal Locking Mechanism |
| GPS Connectivity | Tri-mode GPS/Galileo GLONASS, Geofencing and IMESS/QZSS optimizatio n. 72 Channel |
| Network protocol | CatM1, Bluetooth Low Energy 5 |
| Accelerometer | 3 axis 2g/4g/8g/16g ultra low power MEMS |
| Temperature range | -40 to 85 C |
| Environmental rating | IP54 |
| Dimensions | 59mm x 54mm x 28mm |

Installation Instructions

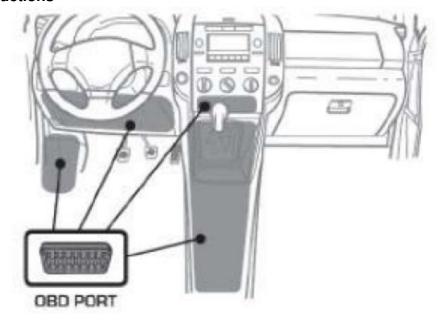

By using user manual of the vehicle find the OBD connector on your car Typically OBD plug can be located:

- Near the breaks unit
- Near the fuse box
- Under the dashboard
- In the middle console
- Plug the connector into the vehicle's OBD.
- Check that the device is fully connected and does not unlock.
- Lock the Secondary Lock to secure the device.

Documents / Resources



COX 2M OBDLTEA1 OBD II Based Vehicle Telemetry and Location [pdf] User Manual OBDLTEA1, 2AV5ZOBDLTEA1, OBDLTEA1, OBDLTEV1, OBD II Based Vehicle Telemetry and Location

Manuals+,