



CREALITY Filament Dry Box User Guide

[Home](#) » [Creality](#) » CREALITY Filament Dry Box User Guide 

Contents


- [1 CREALITY Filament Dry Box](#)
- [2 OVERVIEW](#)
- [3 Operation Guide](#)
- [4 Precautions for safe use](#)
- [5 Product Parameter](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

CREALITY

CREALITY Filament Dry Box



OVERVIEW

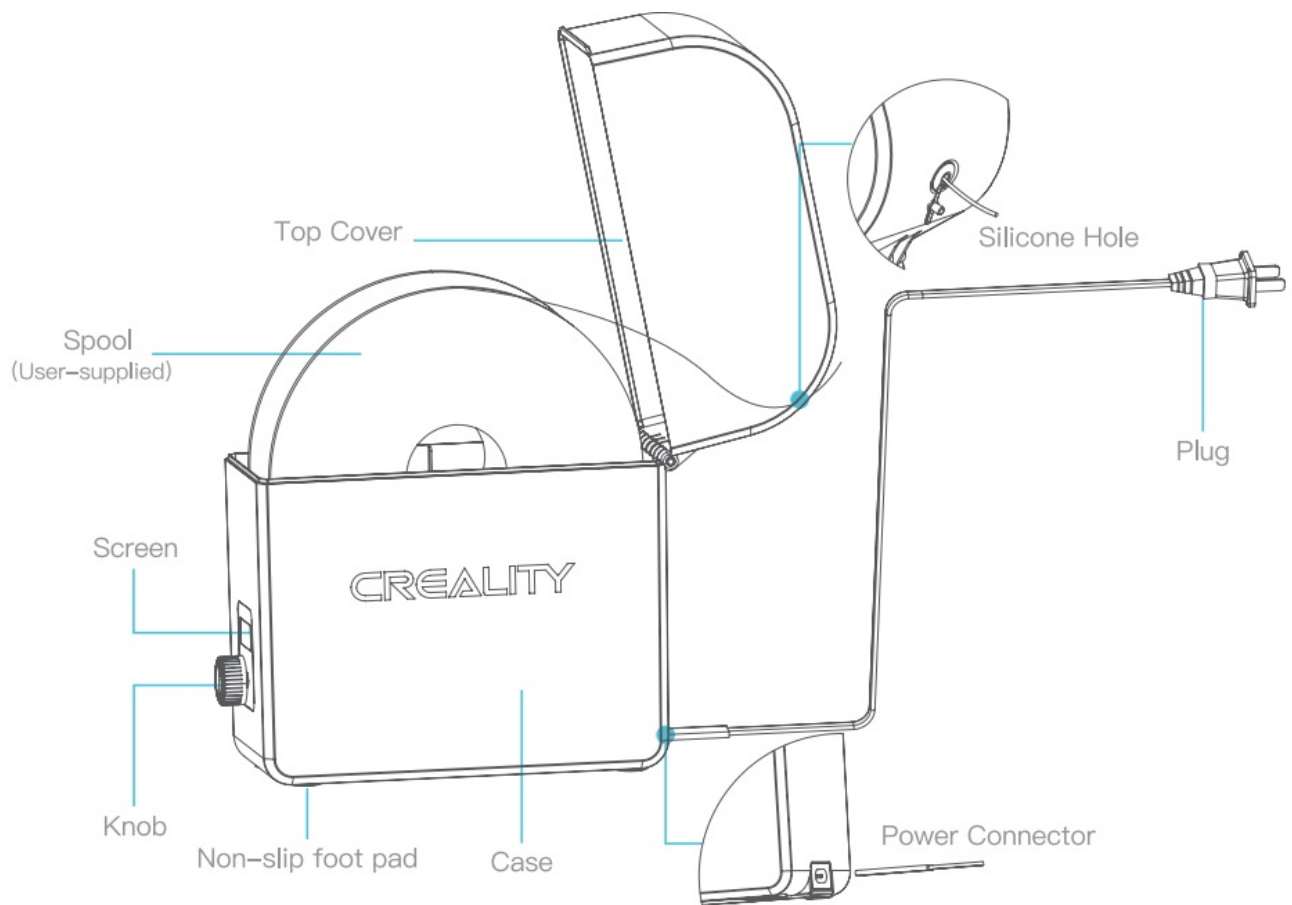

Operation Guide

1. **Turn on power:** Plug the power cord into the socket and connect the dry box to the power supply. When the screen shows OFF, the dry box is in a standby state.
2. **Put in Filament:** Put filament into the dry box, drag it from the hole, close the top cover, and turn the knob clockwise to adjust to the working time by 2/4/8 hours. The dry box will start working. Into the working state.
3. **Process Memory:** If there is a power failure during the drying process, it will automatically memorize and display the drying time before the power failure when it's restarted.

Precautions for safe use

1. Do not use the product when the power cord and socket are damaged or in contact with water.
2. When using the heating function, do not touch the water and other flammable materials.
3. When not using this product for a long time, please cut off the power to avoid sudden fire.
4. Do not use this product in a humid environment.
5. Do not let children play with this product.
6. If this product is malfunctioning, please turn off the power first and pull out the power plug from the socket. Do not continue to use it, and contact our company's after-sales service personnel. Do not replace non-original parts or disassemble and repair by yourself.

Product Parameter


- **Model** DB-01
- **Product Dimension** 233*266*99mm
- **Weight** 953g
- **Color** Transparent, White
- **Material** PPS.ABS. PC
- **Craft** Polishing & Sun Pattern
- **Connector** AC100-240V Power Connector
- **Temperature Range** 50°C± 1.0°C
- **Time Range** OFF/2/4/8 hours
- **Screen** Digital Tube (4 digits)
- **Operation** Knob
- **Power** 120W
- **Power Supply** Built-in
- **Input Voltage** AC 100-240V 50/60Hz
- **Filament Diameter** 1.75mm
- **Spool Supported** 1 kg Filament Sp

Users should comply with the laws and regulations of the corresponding Countries and regions where the equipment is located (used) and ethical principles, fulfill safety obligations, and strictly prohibit the use of our products or equipment for any illegal purposes. Creality will not be responsible for any violators' legal liability under any circumstance.

SHENZHEN CREALITY 3D TECHNOLOGY CO., LTD.

- **Add:** 18F, JinXiuHongDu Building, Meilong Blvd., Longhua Dist., Shenzhen, China 518131
- **Official Website:** www.creality.com
- **Tel:** +86 755-8523 4565
- **E-mail:** info@creality.com cs@creality.com

Documents / Resources

	CREALITY Filament Dry Box [pdf] User Guide Filament Dry Box, Filament Box, Dry Box, Box, 3401010439
---	--