AULA AULA F99 Pro

AULA F99 Pro Wireless Mechanical Keyboard User Manual

Model: AULA F99 Pro
Brand: AULA

Introduction

Welcome to the AULA F99 Pro Wireless Mechanical Keyboard user manual. This guide provides detailed instructions for setting up, operating, maintaining, and troubleshooting your new keyboard. Please read this manual thoroughly to ensure proper use and to maximize your product experience.

Package Contents

Verify that all items are present in the package:

- Keycap/Switches Puller x 1
- USB C Cable x 1
- Extra Leobog Greywood Switches x 2
- Dust Cover x 1
- English Manual x 1

Product Overview

The AULA F99 Pro is a versatile mechanical keyboard designed for gaming and productivity, featuring multiple connectivity options, hot-swappable switches, and customizable RGB lighting.

Key Features

- Tri-mode Connection (Bluetooth, 2.4GHz, USB-C)
- Hot-swappable switch support (3-pin or 5-pin)
- Advanced structure with sound-absorbing foams
- 16.8 Million RGB Backlight with customizable effects

- 99-key 95% compact layout
- 8000mAh high-capacity battery
- Side-printed PBT keycaps


Product Diagram



Front view of the AULA F99 Pro Wireless Mechanical Keyboard, showcasing its compact layout and RGB backlighting.



Infographic highlighting key features of the AULA F99 Pro Custom Keyboard, including BT5.0/2.4G/Wired connectivity, advanced structure, pre-lubed linear switches, RGB backlight, 8000mAh battery, PBT keycaps, hot-swappable design, and 96% layout with Numpad.

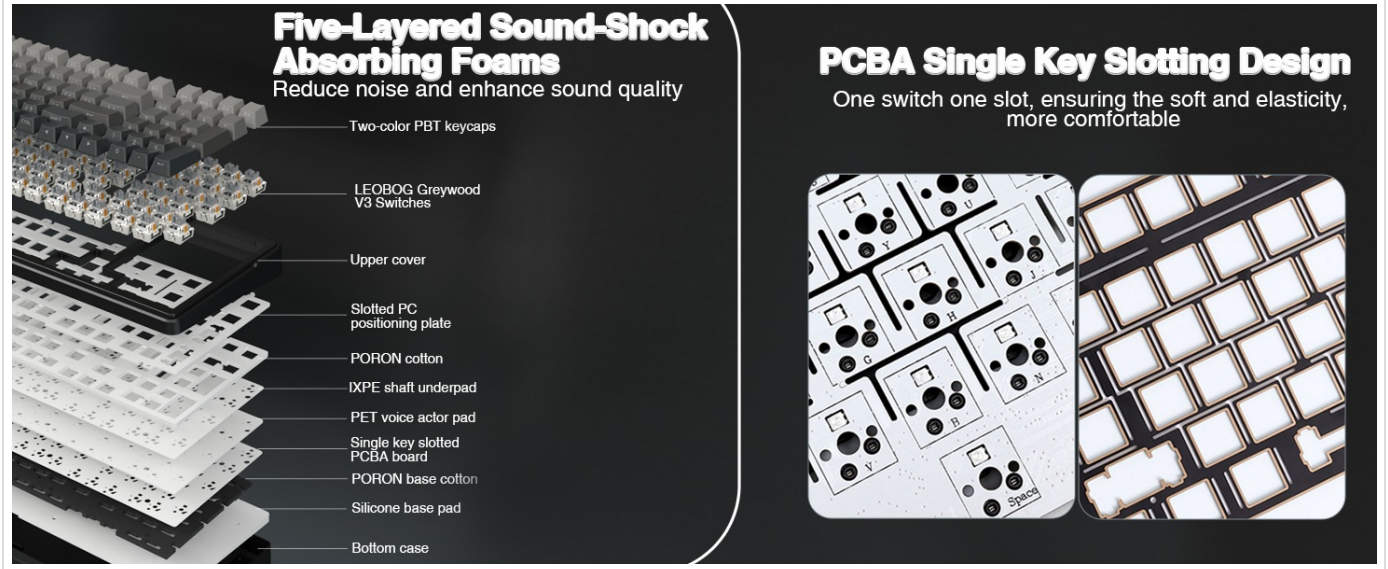

Detailed diagram illustrating the advanced internal structure of the AULA F99 Pro keyboard, including layers for sound absorption and stability.

Setup

Initial Charging

Before first use, fully charge the keyboard using the provided USB-C cable. Connect the USB-C end to the keyboard and the USB-A end to a power source (e.g., computer USB port, wall adapter). The charging indicator will show status.

Connecting the Keyboard

The AULA F99 Pro supports three connection modes: 2.4GHz wireless, Bluetooth 5.0, and USB-C wired.

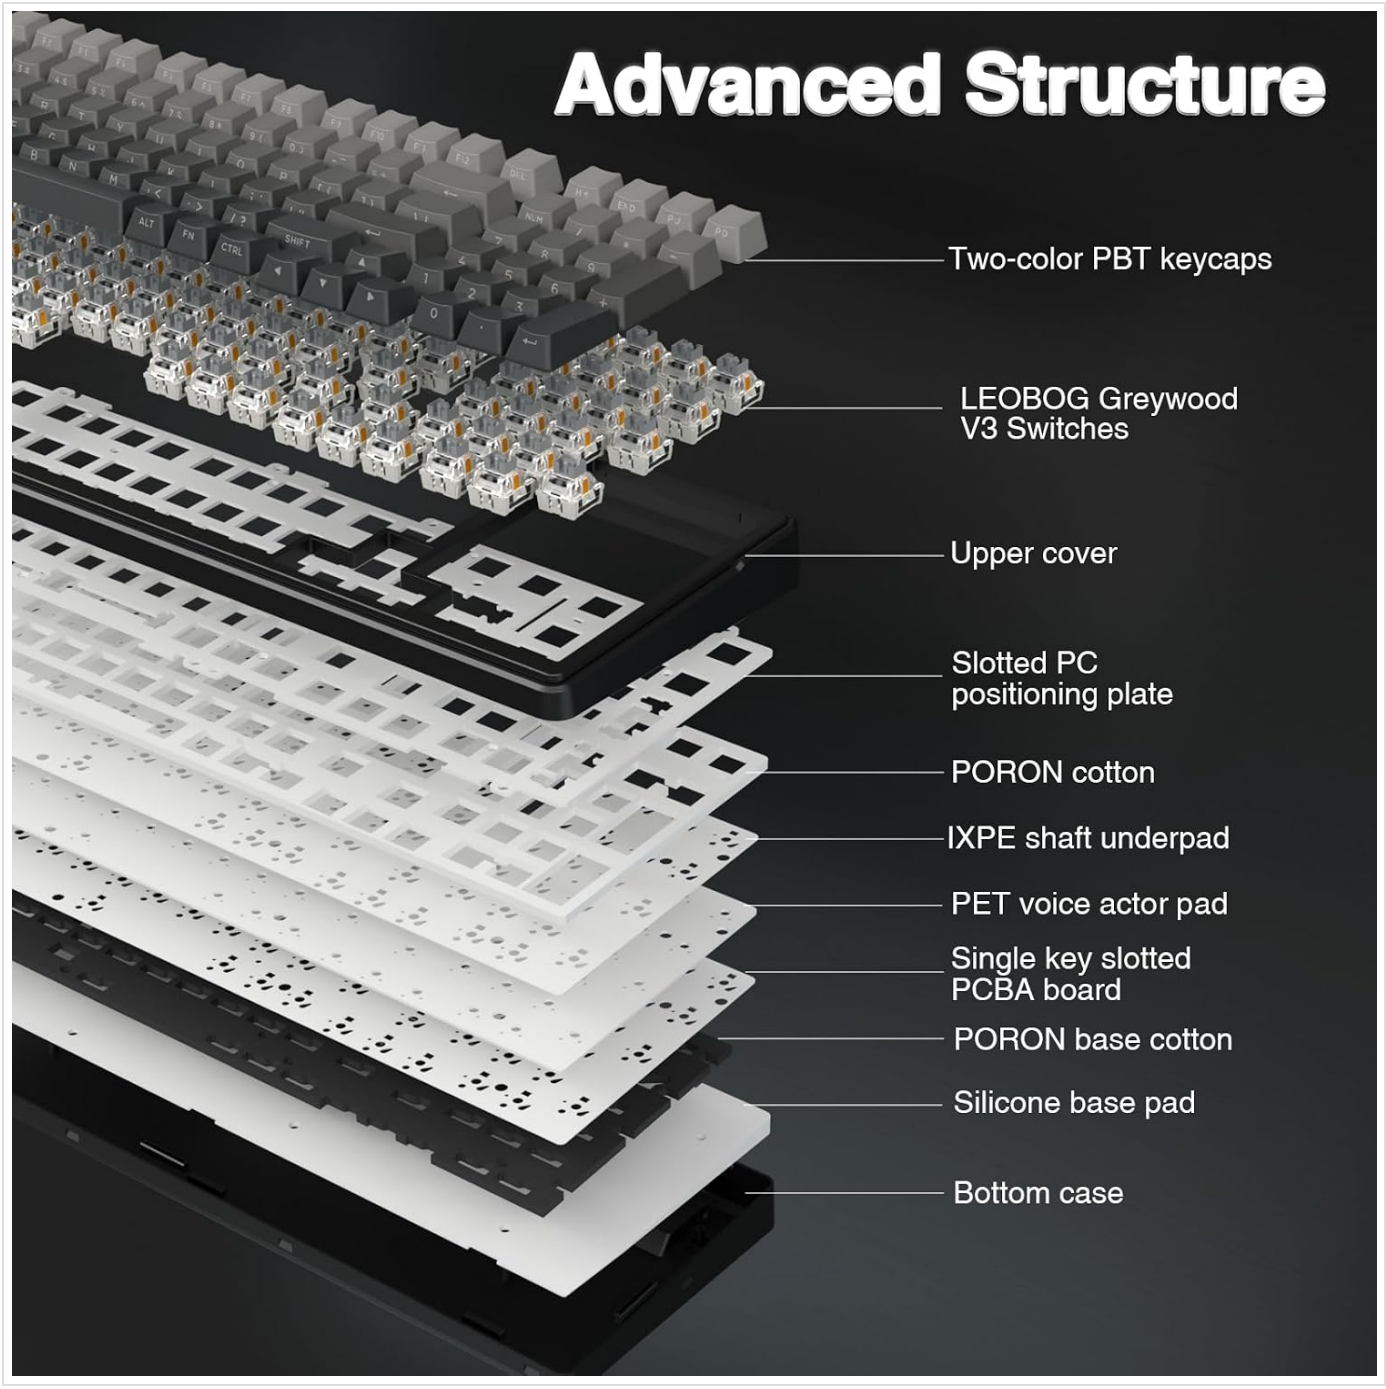


Image illustrating the triple mode connection capabilities of the AULA F99 Pro keyboard, showing connections via Bluetooth 5.0, 2.4GHz wireless, and USB-C wired, compatible with various devices like Switch, Xbox, PlayStation, PC, Laptop, Tablet, and Phone.

2.4GHz Wireless Connection

1. Locate the 2.4GHz USB receiver, usually stored in a slot on the keyboard.
2. Plug the USB receiver into an available USB port on your computer.
3. Switch the mode selector on the keyboard to "2.4G". The keyboard will automatically connect.

Bluetooth Connection

1. Switch the mode selector on the keyboard to "BT".
2. On your device (PC, laptop, tablet, phone), enable Bluetooth and search for new devices.
3. Select "AULA F99 Pro" from the list of available devices to pair.
4. The keyboard can store up to three Bluetooth connections. Use **FN + Q**, **FN + W**, or **FN + E** to switch between paired devices.

USB-C Wired Connection

1. Connect the USB-C cable to the keyboard's USB-C port.
2. Connect the other end of the cable to a USB port on your computer.
3. Switch the mode selector on the keyboard to "USB". The keyboard will function as a wired device and charge simultaneously.

Operating Instructions

RGB Backlight Control

The AULA F99 Pro features 16.8 million RGB lighting colors and various effects.




The AULA F99 Pro keyboard displaying its vibrant 16.8 million RGB backlight, with instructions for adjusting lighting effects and brightness.

- **Fn + Shift (right)**: Switch light bar mode or turn off the light bar.
- **Fn +** \: Switch between 15 RGB light effects or turn off backlight.
- **Fn + Tab**: Switch lighting color.
- **Fn +** ↑: Increase lighting brightness.
- **Fn +** ↓: Decrease lighting brightness.
- **Fn +** ←: Increase lighting speed.
- **Fn +** →: Decrease lighting speed.

Macro Customization

Customize key functions and macros using the dedicated driver software.

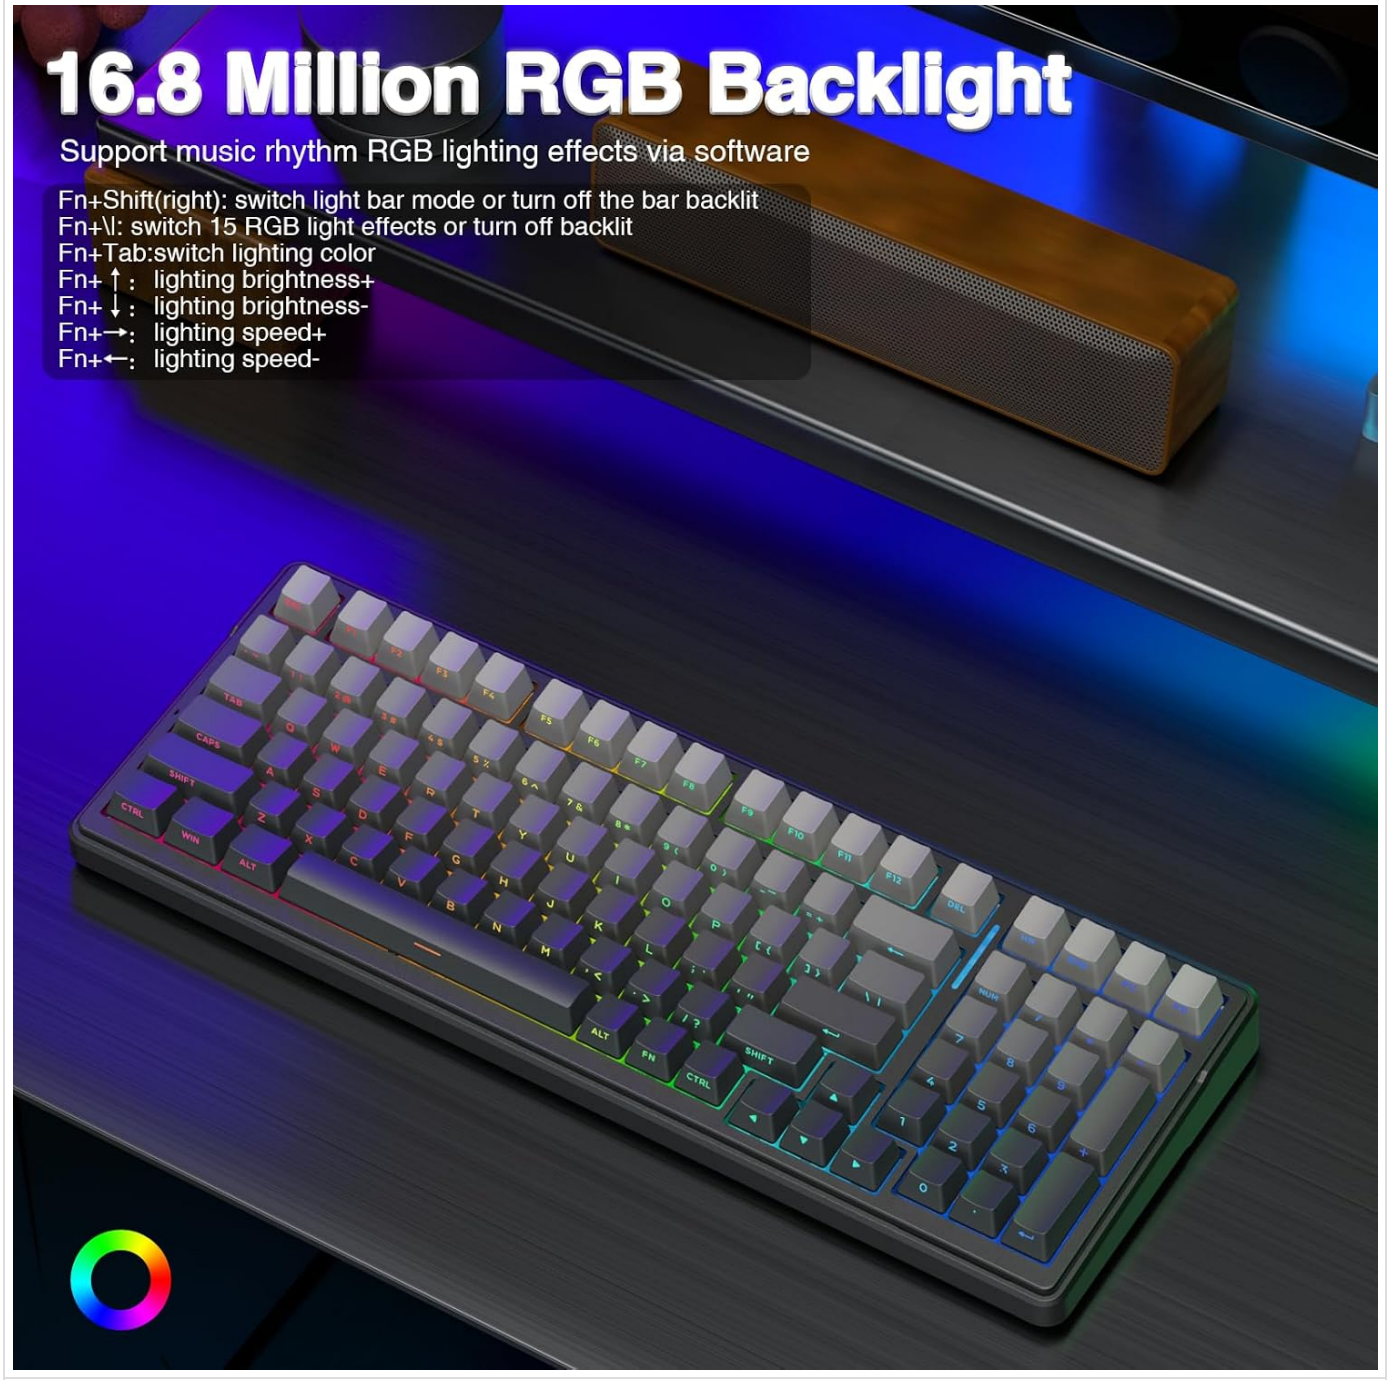

Screenshot of the AULA F99 Pro custom software interface, showing options for RGB backlight customization, macro recording, and custom shortcut keys. The driver supports Windows systems and requires wired mode for operation.

Note: The driver software is only compatible with Windows systems and must be run in wired mode. Download the driver from the official AULA website.

Battery Management

The keyboard is equipped with an 8000mAh battery.



Image highlighting the 8000mAh high-capacity battery of the AULA F99 Pro keyboard, indicating a battery life of approximately 53 hours with backlight on and 400 hours with backlight off.

- Battery Life (Backlight ON): Approximately 53 hours.
- Battery Life (Backlight OFF): Approximately 400 hours.

Maintenance

Cleaning

Regularly clean your keyboard to ensure optimal performance and longevity.

- Use a soft, lint-free cloth to wipe down the keycaps and keyboard surface.
- For deeper cleaning, use the provided keycap puller to remove keycaps and clean underneath with compressed air or a small brush.
- Avoid using harsh chemicals or abrasive materials.

Switch Replacement

The AULA F99 Pro supports hot-swappable switches.



Diagram illustrating the hot-swappable feature of the AULA F99 Pro keyboard, showing how switches can be easily removed and replaced without soldering, supporting both 3-pin and 5-pin switches.

1. Power off the keyboard or disconnect it from your device.
2. Use the switch puller tool to gently grip the switch and pull it straight up.
3. Align the pins of the new switch with the holes on the PCB and press down firmly until it clicks into place. Ensure pins are not bent.

Troubleshooting

Problem	Possible Cause	Solution
Keyboard not responding in wireless mode.	Low battery; Incorrect mode selected; Receiver not properly connected; Bluetooth not paired.	Charge the keyboard; Ensure correct mode (2.4G/BT) is selected; Re-insert USB receiver; Re-pair Bluetooth.
Keys not registering or double-typing.	Dust/debris under keycap; Faulty switch.	Remove keycap and clean; Replace the switch (if hot-swappable).
RGB backlight not working.	Backlight turned off; Brightness set to minimum.	Press **Fn +** \ to cycle effects or **Fn +** ↑ to increase brightness.
Cannot connect via Bluetooth.	Keyboard in 2.4G/Wired mode; Device Bluetooth off; Interference.	Switch keyboard to BT mode; Ensure device Bluetooth is on; Move closer to device.
Driver software not detecting keyboard.	Keyboard not in wired mode; Driver not installed correctly; Operating system incompatibility.	Ensure keyboard is connected via USB-C and set to "USB" mode; Reinstall driver; Note: Driver supports Windows only.

Specifications

Brand: AULA

Model: F99 Pro

Connectivity: 2.4GHz Wireless, Bluetooth 5.0, USB-C Wired

Layout: 99-key (95% Compact)

Keycaps: Side-Printed PBT

Switches: Pre-lubed Linear Switches (LEOBOG Greywood V3)

Hot-Swappable: Yes (3-pin/5-pin)

Backlight: 16.8 Million RGB (Programmable)

Battery Capacity: 8000mAh

Weight: 3.3 pounds

Dimensions: 16.57 x 7.13 x 2.2 inches

Compatible Devices: PC, Laptop, Gaming Console, Tablet, Smartphone

Country of Origin: China

Warranty and Support

For warranty information and technical support, please refer to the official AULA website or contact your retailer. Keep your purchase receipt for warranty claims.

For further assistance, visit the AULA Store on Amazon.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question