




# CYCMOTOR Topology DS103 TFT and Remote BMZ Display User Guide

[Home](#) » [CYCMOTOR](#) » CYCMOTOR Topology DS103 TFT and Remote BMZ Display User Guide 

## CYCMOTOR Topology DS103 TFT and Remote BMZ Display User Guide



### Contents

- [1 Product Details](#)
- [2 Quick Start Guide](#)
- [3 Functionalities](#)
- [4 Installation](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

## Product Details

### Product Name

Intellegent LCD display, model : DS103

Firmware: CYCMotor Ltd specic rmware

### Features

- Simple and lightweight, separate installation bracket design
- High brightness, high contrast 3.5 coloured TFT screen
- Clock function (clock is on when the display shutdown)
- Excellent outdoor design with IP65 level waterproof
- Micro USB serial communication port, convenient maintenance services.

### Dimensions & Materials


#### Materials


Product shell – ABS + PC plastic

Transparent window – Tempered glass

#### Dimensions

L 110mm x W 68.2mm x H 68mm

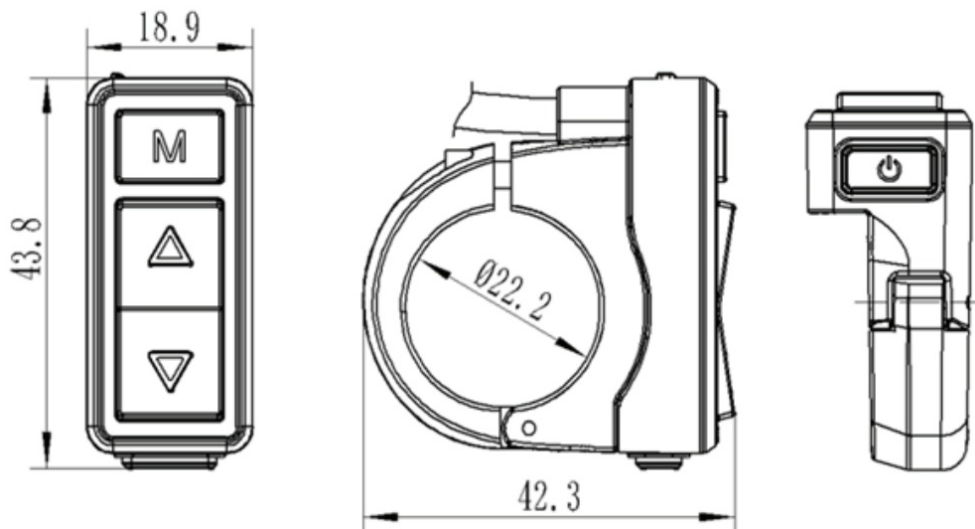

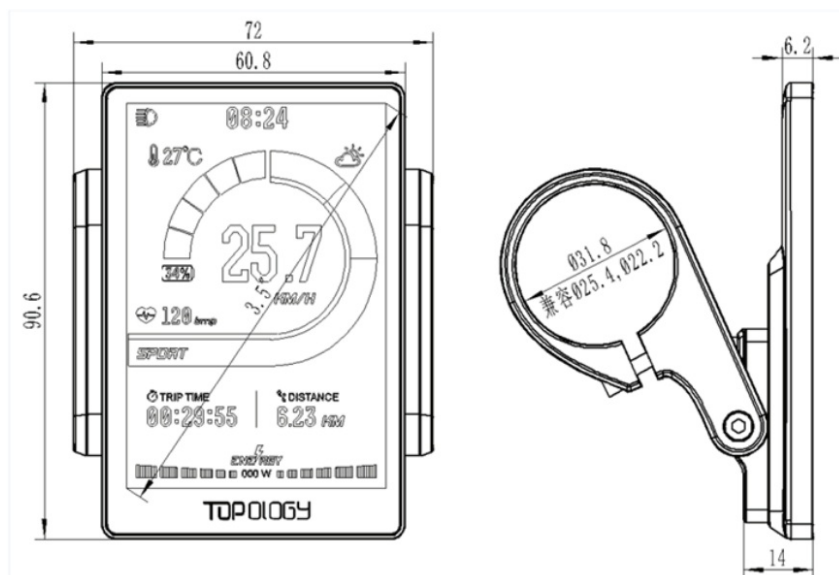



## Electrical Specifications

- Power supply DC 24V/36V/48V/ 52V
- Rated current 30ma/36V
- Shutdown leakage current <1uA
- Screen specication 3.5" colored TFT 480\*320pixels
- Communication method UART (default)
- Operating temperature -20°C ~ 60°C
- Storage temperature -30°C ~ 80°C
- Waterproof level IP65



## Quick Start Guide

After unboxing and installing your CYC motor system, there are two main things you need to set up.

1. Change your Battery No. settings according to your rated voltage. Within 15 seconds of turning on your display, long press the MENU button to enter the settings functions. Press UP/DOWN to navigate the settings page & MENU to select.

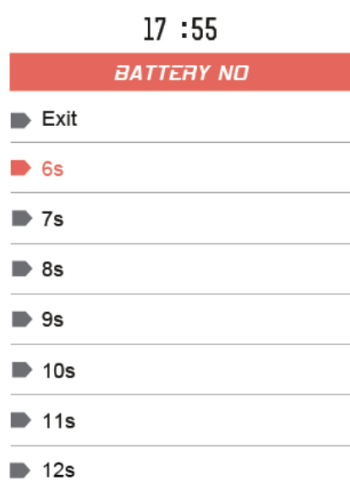

2. Change your Wheel settings according to your bike's wheel size.

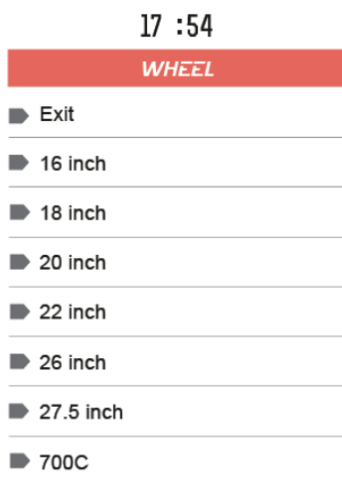

3. Now, you can set things up like your temperature and speed unit as well as your brightness level. Otherwise you're good to go!

## Functionalities

### Power On/ Off

Press and hold the POWER button for 3 seconds to turn the display on/ o.


### Navigation

The MENU button is used to go into your main settings page & your clear data page. It is also used to enter and select a setting or function.

1. POWER
2. MENU
3. UP
4. DOWN


### Switch Dashboard

Switch the main dashboard to display different information by pressing the MENU button.

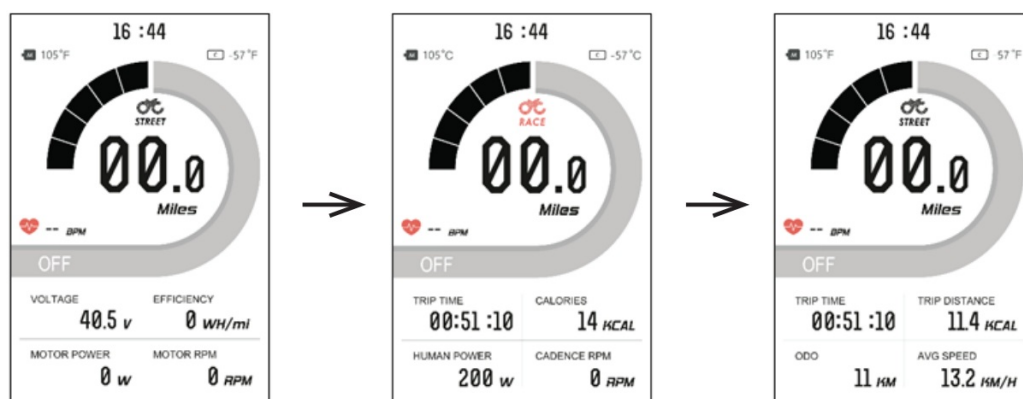

### Assist Level Operating

Press the UP/ DOWN button to change the assist level between level 1, 2, and 3. Note that “OFF” means no motor assistance will be given.

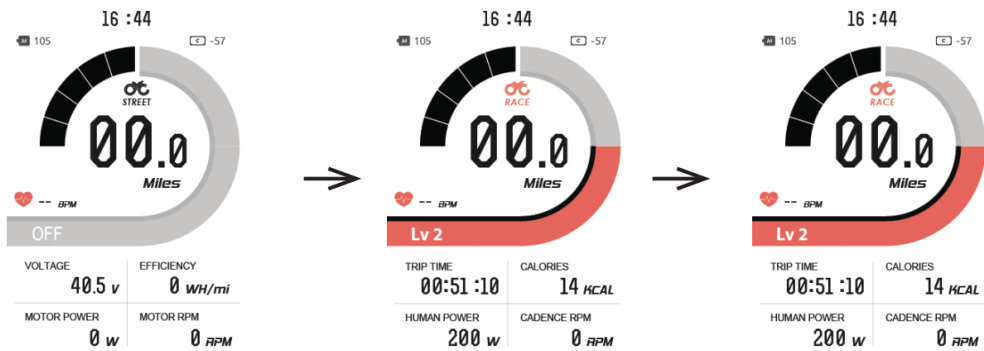

## Dark & Light Themed Dashboard

Long press the UP button to switch between light and dark themed dashboard.





## Walk Assist

Hold in the DOWN button to activate walk assist. Note that it takes 3 seconds to activate & will deactivate immediately when the button is released.





## Settings

Long press the MENU button within 15 seconds of switching on the display to enter the “Settings” page. Note that once the system has been activated for longer than 15 seconds, you will need to restart the motor system to enter the settings menu.

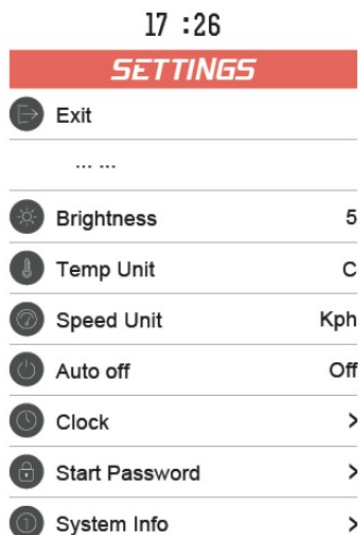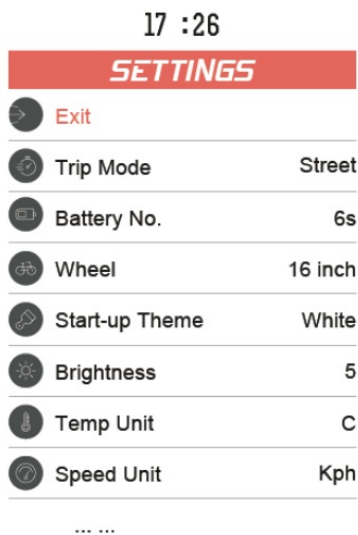

### Clean Trip Data

Wait 15 seconds after starting up the motor system to enter the “Clean Data” menu. Long press the MENU button to clear the previous trip data. Please note that the trip data does not automatically clear once you restart the motor system. This is a manual process.

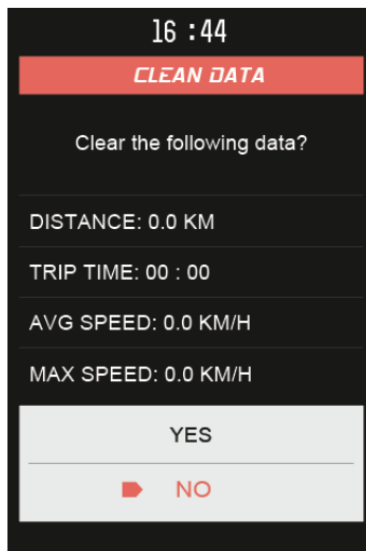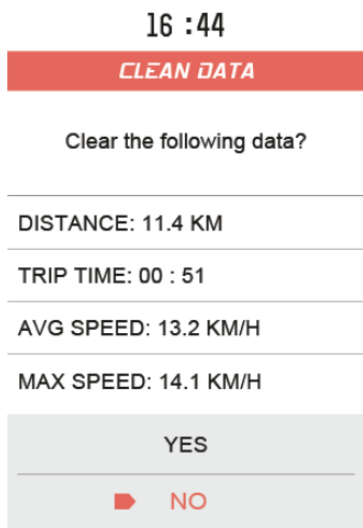

### Error Codes

In certain circumstances, an error code may appear on your display. Contact [technical\\_support@cycmotor.com](mailto:technical_support@cycmotor.com)

Error Code on App & DS103 Display
Controller Over Voltage
Controller Under Voltage
Controller Internal Error 1
Controller Over Temperature
Motor Over Temperature
Controller Internal Error 10
Controller Internal Error 2
Controller Internal Error 3
Controller Internal Error 4
Controller Internal Error 5
Controller Internal Error 6
Controller Internal Error 7
Controller Internal Error 8
Controller Internal Error 9
Hall Sensor Error
Throttle Error
Speed Sensor Error

## Installation

1. Determine if you need to select the corresponding mounting clamp and rubber clip ring according to the diameter of your handlebar (Applicable handlebar specifications  $\Phi 22.2$  ;  $\Phi 25.4$  ;  $\Phi 31.8$ ).
2. Open the display lock clamp and insert the rubber clip (if applicable) into the correct position of the lock clamp.
3. Set the rubber ring in the bracket (if applicable) then assemble on the middle of the handlebar. You can adjust the angle of the display to make the display screen more visible when riding. After xing the angle, tighten the screws. Tightening torque is 1N.m.
4. Open the lock ring of the switch and set it in the appropriate position on the left side of the handlebar. Adjust the angle and position of the switch as needed in order to ensure that you can operate the switch easily.
5. Fix and tighten the handlebar xing screw with M3Hex wrench (locking torque is 0.8Nm).
6. Connect the display connector to the controller connector according to the label.

**Note:** Damage caused by excessive torque is not covered by warranty.


## Compatibility

The clamps are suitable for 3x dierent handlebar sizes: 31.8mm, 25.4mm, and 22.2mm.



## Pin Layout

### Male 5-Pin Connector

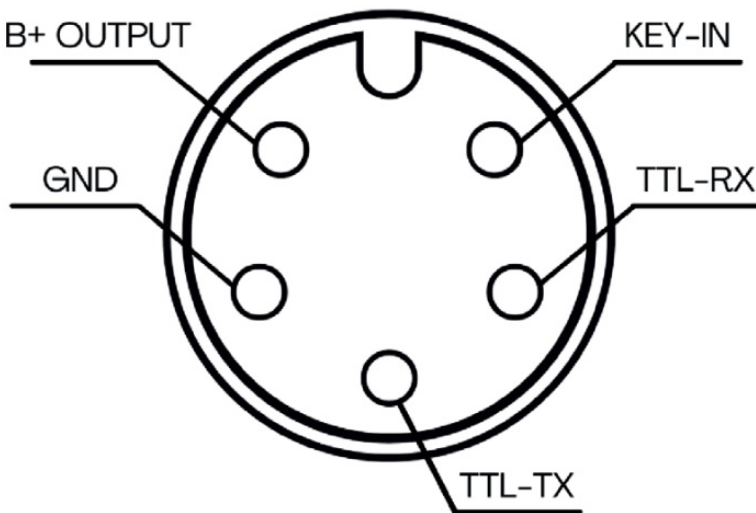

1. Red wire: Anode (36V to 72V)
2. Black wire: GND
3. Yellow wire: TxD (display -> controller)
4. Green wire: RxD (controller -> display)
5. Blue wire: Power ord to the controller

### Cerification

CE / IP65 (waterproof) / ROHS.

Be sure to contact [technical\\_support@cycmotor.com](mailto:technical_support@cycmotor.com) if further assistance is needed. Thank you!

## Documents / Resources





TOPOLOGY DS103

Display Guide

1.0.0

## [CYCMOTOR Topology DS103 TFT and Remote BMZ Display](#) [pdf] User Guide

Topology DS103, TFT and Remote BMZ Display, Topology DS103 TFT and Remote BMZ Display, Remote BMZ Display, BMZ Display, Display