

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [TOOQ](#) /

› [TOOQ DB1202TN-B Dual Monitor Desk Mount with Laptop Tray Instruction Manual](#)

## TOOQ DB1202TN-B

# TOOQ DB1202TN-B Dual Monitor Desk Mount with Laptop Tray Instruction Manual

Model: DB1202TN-B

## 1. INTRODUCTION

---

This manual provides detailed instructions for the assembly, installation, operation, and maintenance of your TOOQ DB1202TN-B Dual Monitor Desk Mount with Laptop Tray. Please read this manual thoroughly before installation and use to ensure proper setup and safe operation. Keep this manual for future reference.

## Table mount for two 17"- 32" screens and laptop holder



Figure 1: TOOQ DB1202TN-B Dual Monitor Desk Mount with Laptop Tray in use.

## 2. SAFETY INFORMATION

---

- **Read all instructions:** Ensure you understand all instructions and warnings before installation and use.
- **Weight Capacity:** Do not exceed the maximum weight capacity of 9 kg (19.8 lbs) per monitor arm and 9 kg (19.8 lbs) for the laptop tray. Exceeding this limit may result in serious injury or property damage.
- **Monitor Size:** This mount is designed for monitors between 17 and 32 inches.
- **Laptop Size:** The tray is suitable for laptops between 12 and 17 inches.
- **VESA Compatibility:** Ensure your monitors are VESA compatible (75x75mm or 100x100mm).
- **Desk Thickness:** Verify your desk thickness is within the specified range for clamp or grommet installation.
- **Assembly:** Assemble the product according to the instructions. Incorrect assembly can lead to product failure or injury.
- **Children:** Keep small parts away from children.
- **Maintenance:** Regularly check that the mount is secure and all fasteners are tight.

### 3. PACKAGE CONTENTS

---

Please verify that all components are present and undamaged before proceeding with installation. If any parts are missing or damaged, contact customer support.

- 1x Main Pole
- 2x Monitor Arms
- 1x Laptop Tray
- 1x Desk Clamp Assembly
- 1x Grommet Mount Assembly
- 1x Hardware Kit (screws, washers, Allen keys)
- 1x Instruction Manual

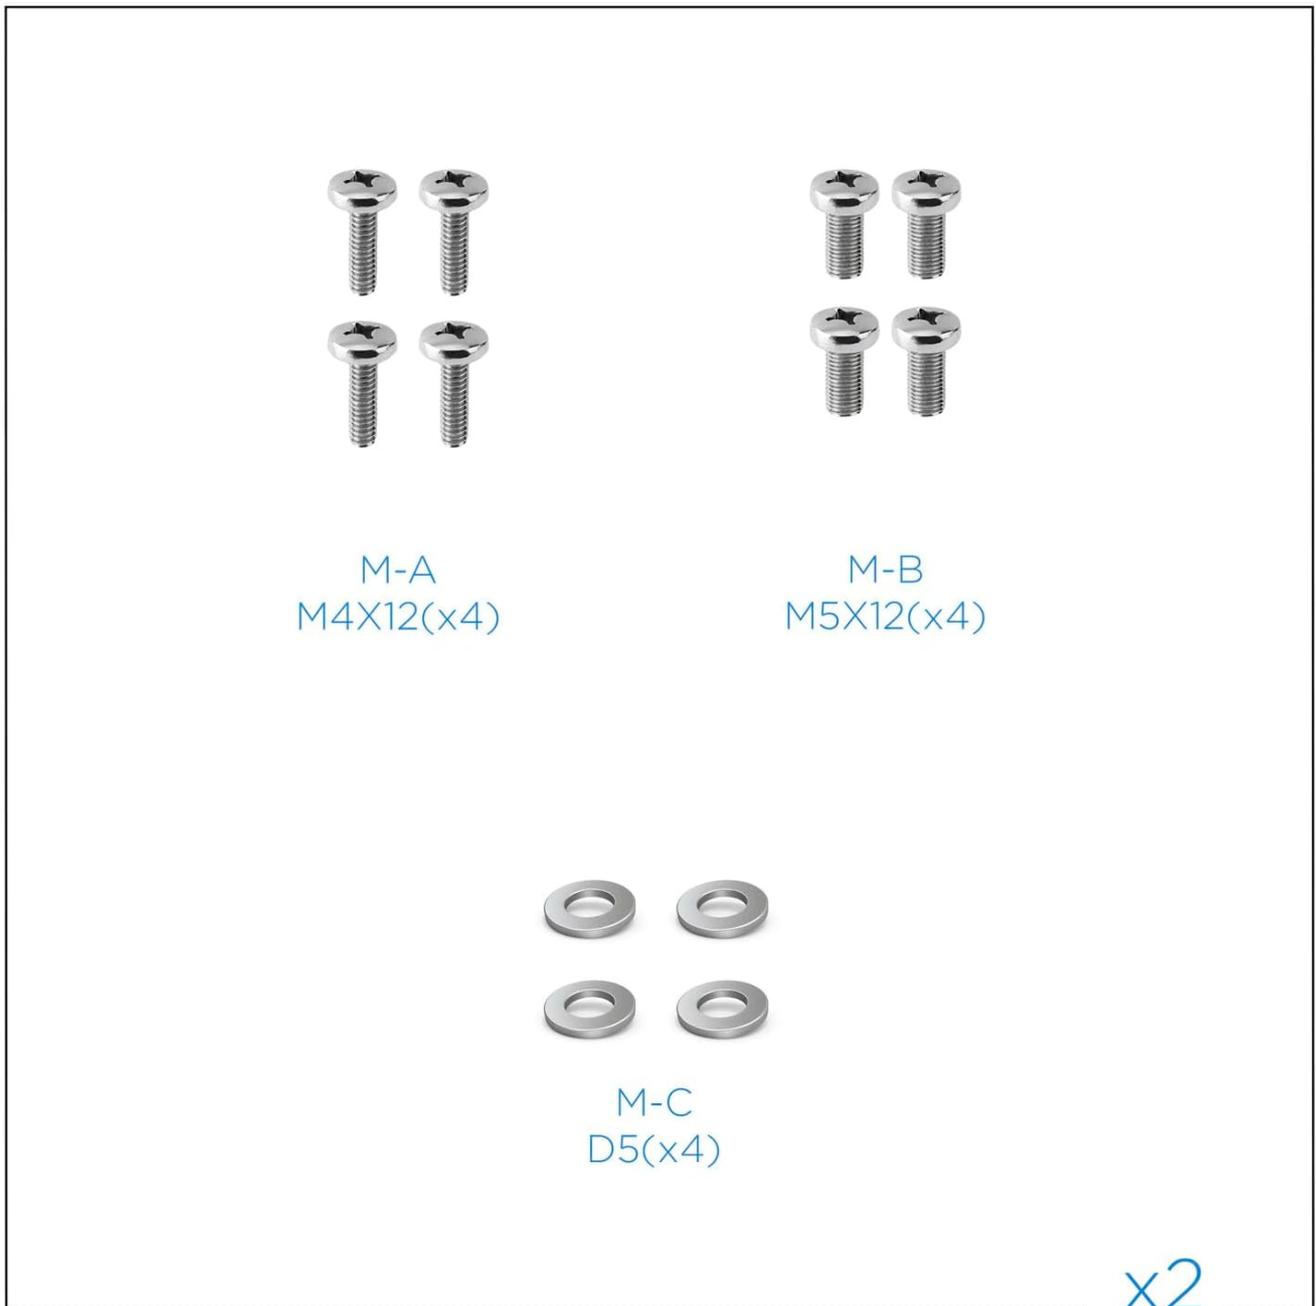


Figure 2: Included mounting hardware (M-A: M4x12, M-B: M5x12, M-C: D5 washers).

### 4. SPECIFICATIONS

---

Feature	Detail
Model	DB1202TN-B
Monitor Size Compatibility	17" - 32"
Monitor Weight Capacity	9 kg (19.8 lbs) per arm
Laptop Size Compatibility	12" - 17"
Laptop Tray Weight Capacity	9 kg (19.8 lbs)
VESA Compatibility	75x75mm, 100x100mm
Tilt Angle	+45° / -45°
Swivel Angle	+90° / -90°
Rotation Angle	+180° / -180°
Material	Alloy Steel
Color	Black
Product Dimensions	43.5 x 29.5 x 13.5 cm (approximate, as packaged)
Product Weight	5.4 kg



Figure 3: Detailed technical drawing with dimensions.

## 5. SETUP AND INSTALLATION

The TOOQ DB1202TN-B offers two installation options: desk clamp or grommet mount. Choose the method best

suitable for your desk.

## 5.1 Desk Clamp Installation

1. Attach the desk clamp base to the main pole using the provided screws.
2. Position the clamp on the edge of your desk. Ensure the desk thickness is compatible with the clamp's range.
3. Tighten the clamp screw until the mount is securely fastened to the desk. Do not overtighten.



Figure 4: Desk clamp installation.

## 5.2 Grommet Mount Installation

1. If your desk has a grommet hole, remove the existing grommet cover.
2. Assemble the grommet base components as per the diagram in the manual (not provided here, but implied).
3. Insert the main pole through the grommet hole.
4. Secure the grommet base from underneath the desk using the provided plate and nut. Tighten firmly.



Figure 5: Grommet mount installation.

## 5.3 Attaching Monitor Arms and Laptop Tray

1. Slide the monitor arms onto the main pole at your desired height. Secure them with the locking collars.
2. Slide the laptop tray arm onto the main pole and secure it.
3. Attach the VESA plates to the back of your monitors using the appropriate M4x12 or M5x12 screws and D5 washers from the hardware kit. Ensure the screws are not overtightened and do not damage the monitor.
4. Carefully slide the monitors (with VESA plates attached) onto the monitor arms. Ensure they click into place.

securely.

5. Place your laptop onto the laptop tray. Adjust the width-adjustable claws to securely hold your laptop.

### Laptop holder

fits computers from 12" to 17"  
with a max. weight of 9 kg



Figure 6: Attaching monitor arms and adjusting height.

## Adjustable and tilting laptop stand

gives your laptop the right tilt for comfortable use



Figure 7: Laptop holder with adjustable width claws (276-472mm).

## 6. OPERATING INSTRUCTIONS AND ADJUSTMENTS

---

This monitor mount offers various adjustment options to achieve an ergonomic setup.

- **Height Adjustment:** Loosen the locking collar on the main pole to slide the monitor arms and laptop tray up or down. Retighten the collar once the desired height is reached.
- **Tilt Adjustment:** The monitor and laptop tray can be tilted +45° to -45°. Use the provided Allen key to adjust the tension if the screen does not hold its position.
- **Swivel Adjustment:** Swivel your monitors up to 90° horizontally or vertically.
- **Rotation Adjustment:** Rotate your monitors +180° to -180° for portrait or landscape orientation.
- **Laptop Tray Tilt:** The laptop tray also offers tilt adjustment for comfortable typing and viewing angles.

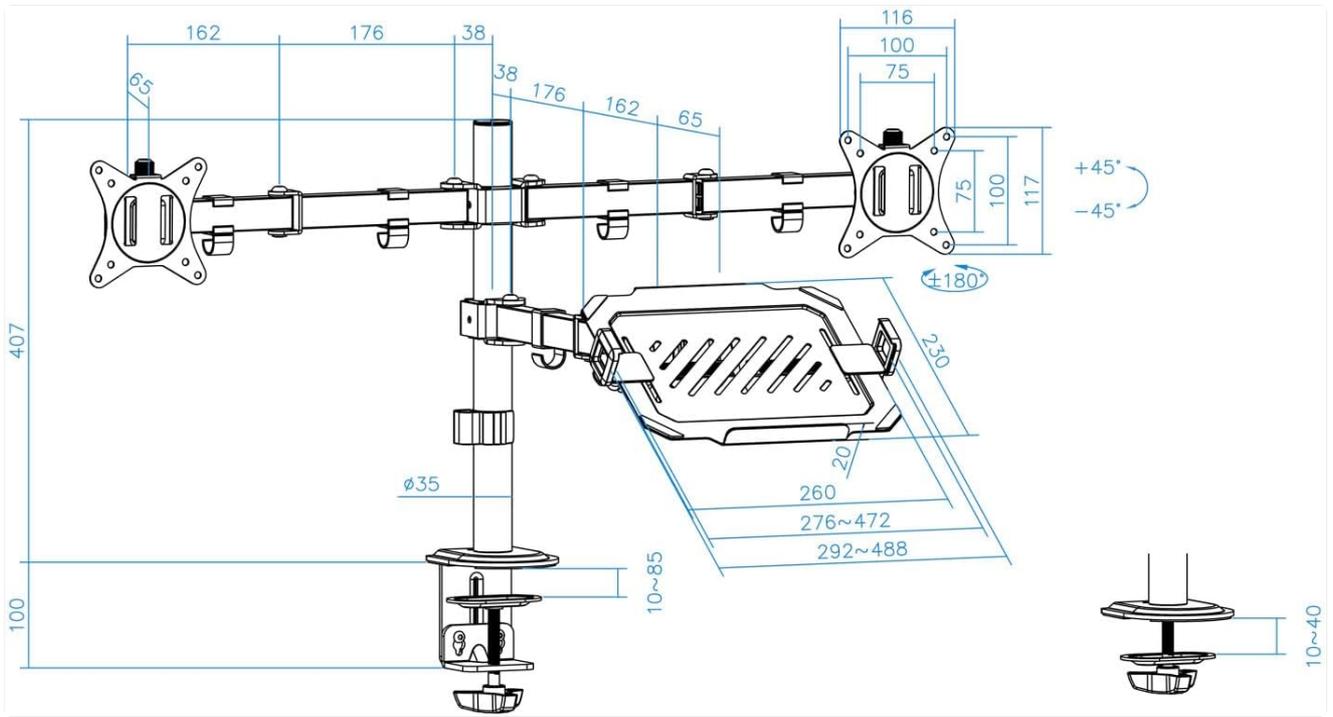


Figure 8: Laptop tray tilt adjustment.

## Create an ergonomic dual-screen environment


by adjusting or rotating the screens as you like



Figure 9: Monitor swivel and rotation capabilities.

### 6.1 Cable Management

Utilize the integrated cable clips along the arms and main pole to route and organize your monitor and laptop cables. This helps maintain a clean and tidy workspace.

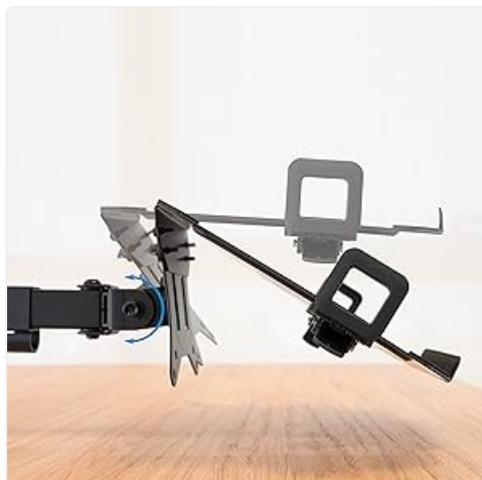

## 7. MAINTENANCE

---

- **Cleaning:** Wipe the mount with a soft, damp cloth. Avoid abrasive cleaners or solvents.
- **Tightness Check:** Periodically check all screws and fasteners to ensure they remain tight and secure. Retighten as necessary.
- **Lubrication:** No lubrication is required for normal operation.

## 8. TROUBLESHOOTING

---

- **Monitor sags or does not hold position:**
  - Ensure the monitor weight does not exceed the maximum capacity (9 kg per arm).
  - Tighten the tilt adjustment screw on the VESA plate using the provided Allen key.
- **Mount is unstable:**
  - Verify the desk clamp or grommet mount is securely tightened to the desk.
  - Ensure the main pole and arm collars are tightened.
- **Laptop tray sags:**
  - Ensure the laptop weight does not exceed the maximum capacity (9 kg).
  - Tighten the tilt adjustment screw for the laptop tray.
- **Missing parts:**
  - Refer to the "Package Contents" section. If parts are missing, contact customer support.

## 9. WARRANTY AND SUPPORT

---

For warranty information or technical support, please refer to the documentation included with your purchase or visit the official TOOQ website. Keep your purchase receipt as proof of purchase.