



CYP SDM-XT-C 4K30 USB-C Video Capture Module Card User Manual

[Home](#) » [CYP](#) » CYP SDM-XT-C 4K30 USB-C Video Capture Module Card User Manual 

CYP SDM-XT-C 4K30 USB-C Video Capture Module Card User Manual



Contents

1 DISCLAIMERS
2 COPYRIGHT NOTICE
3 TRADEMARK ACKNOWLEDGMENTS
4 SAFETY PRECAUTIONS
5 VERSION HISTORY
6 INTRODUCTION
7 APPLICATIONS
8 PACKAGE CONTENTS
9 SYSTEM REQUIREMENTS
10 FEATURES
11 OPERATION CONTROLS AND FUNCTIONS
12 Card Installation
13 Card Removal
14 CONNECTION DIAGRAM
15 SPECIFICATIONS
16 Video Specifications
17 Audio Specifications
18 Cable Specifications
19 ACRONYMS
20 Documents / Resources
20.1 References
21 Related Posts

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2024 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.
- Please completely disconnect the power when the unit is not in use to avoid wasting electricity.

VERSION HISTORY

REV.	DATE	SUMMARY OF CHANGE
RDV1	2023/06/07	Preliminary release
RDV2	2023/08/22	Adding card installation warnings Adjusting the page number of contents

INTRODUCTION

This 4K30 USB-C Video Capture Module Card allows the product it has been installed in to connect to a PC or laptop via the USB-C interface to capture or record video signals up to 4K@30Hz.

The module's design is compatible with a variety of products that have a standard CYP Module Slot, offering increased flexibility to customers. This module card's output supports video capture on Windows, macOS, and Linux systems.

APPLICATIONS

- PC video capturing for live streaming on Facebook, YouTube or Twitch channels via OBS
- Video capturing for communication software
- A useful capture tool for meeting room and classroom applications

PACKAGE CONTENTS

- 1× 4K30 USB-C Video Capture Module Card
- 2× Mounting Screws
- 1× Operation Manual

SYSTEM REQUIREMENTS

- Must be installed into a product with an available compatible CYP Module Slot
- Personal computer (Windows or macOS) with a USB-C port and plenty of available hard drive space.

FEATURES


- Supports video resolutions up to 4K@60Hz from the product it is installed into
- USB-C output allows uncompressed video and audio data capture (up to 4K@30Hz, LPCM 2.0) via the connected PC

Note: 4K sources with framerates higher than 30Hz are automatically converted to lower framerates which depends on the setting of your PC software.
- Complies with the UAC (USB Audio Class) and UVC (USB Video Class) standards, allowing the unit to support the most common capture and video streaming software

Note: Access to many of the software controllable features of the unit, beyond simple video capture, requires the use of the USB Video Capture Control software which is optionally available for Windows 10 or later PCs.
- Supports video timing stabilization to help ensure a reliable and stable USB capture stream
- Capturing over a USB 2.0 connection (rather than USB 3.0) requires the application of minimal MJPEG compression to the video data (output up to 720p@30Hz, LPCM 2.0 is supported)
- Supports the Free OBS (Open Broadcaster Software) streaming software which is available for Windows 10 (or later), macOS, and Linux

OPERATION CONTROLS AND FUNCTIONS

Front Panel

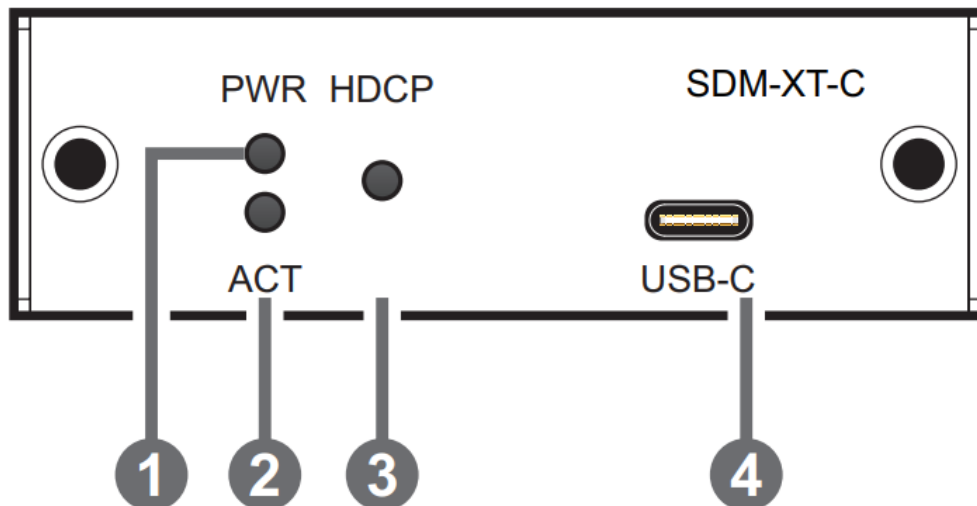


1. **PWR LED:** This LED will illuminate red to indicate the card is receiving power. The color of the LED will change to green when a valid video source has been detected.
2. **ACT LED:** When software on the connected PC is actively receiving video from the unit via USB, this LED will illuminate green.
3. **HDCP LED:** This LED will illuminate when the source contains HDCP encrypted content (green for HDCP 1.x, blue for HDCP 2.2).

Note: Video capture of HDCP encrypted content is not supported and the output will be blacked out.

4. **USB-C Out Port:** Connect to a PC or laptop for video capture.


Card Installation

- To install this module card into your unit, it must have at least one available CYP Module Slot.
- Make sure the antistatic procedure is processed before touching the module card.
- Please hold the dummy faceplate for installation and do not touch the components or the edge connector in case causing damage to the module card
 1. Prior to installation, power the unit completely off.

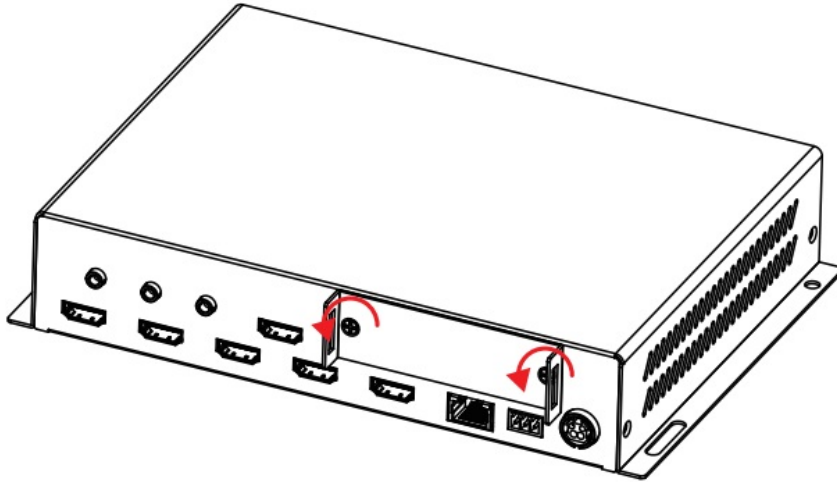


2. Remove the dummy faceplate that is covering the card module slot by unscrewing both screws.

Note: Be sure to store the dummy faceplate, and its screws, somewhere safe, in case you need to use them again later.

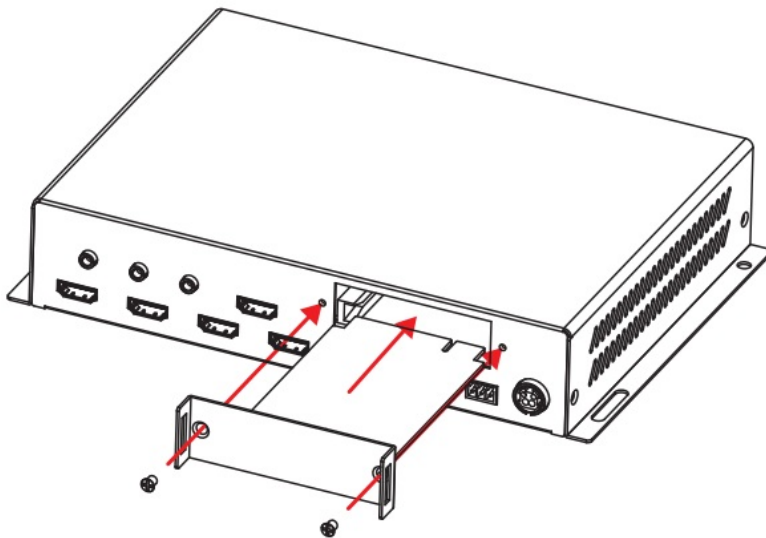


3. Align the card with the guiderails to each side of the module slot, and gently slide the module card into the slot until its faceplate is flush with the back of the unit.

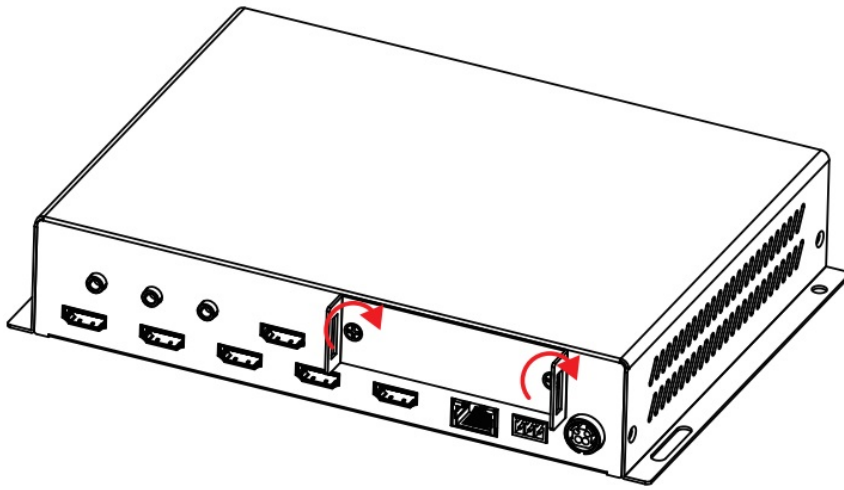


4. Secure the module to the unit by using the supplied screws.
5. The unit may now be powered back on. The card's power LED will light up to indicate it is receiving power. In most cases, the card will be automatically detected by the unit and be available for use.

Card Removal


1. Prior to removal, power the unit completely off.

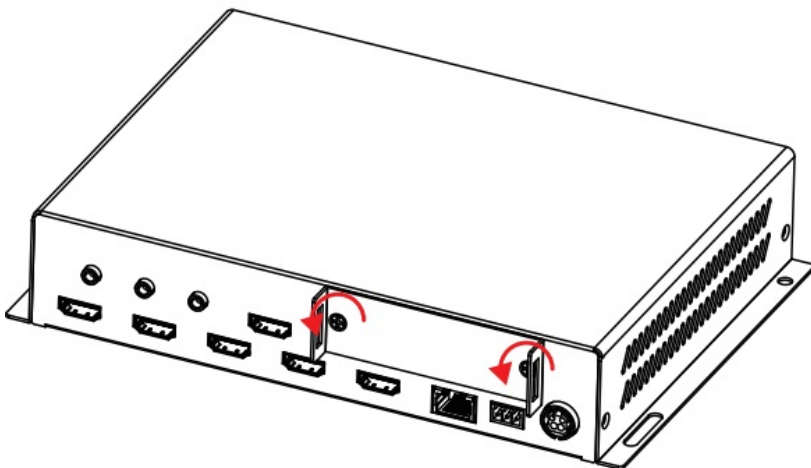

2. Completely unscrew both screws.

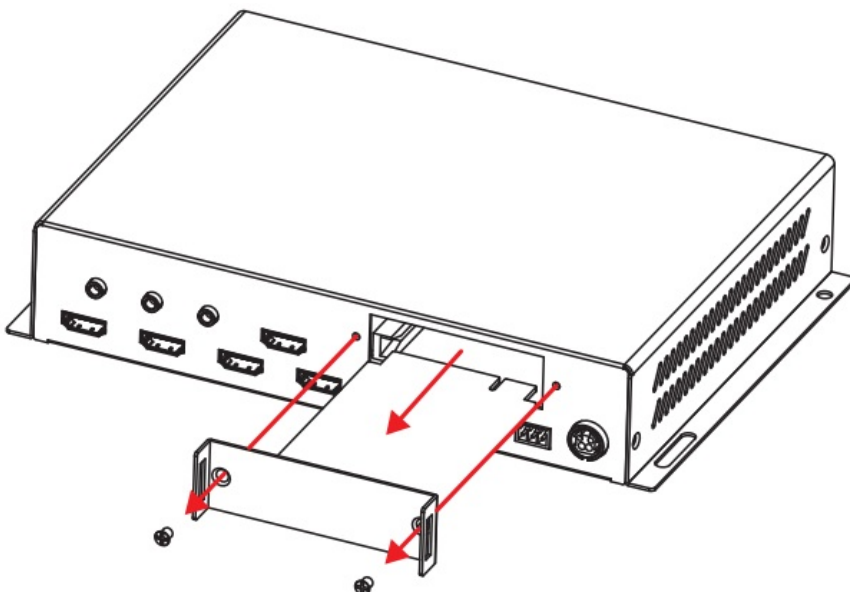


3. Gently pull the card straight out of the module slot using the handles on each side.

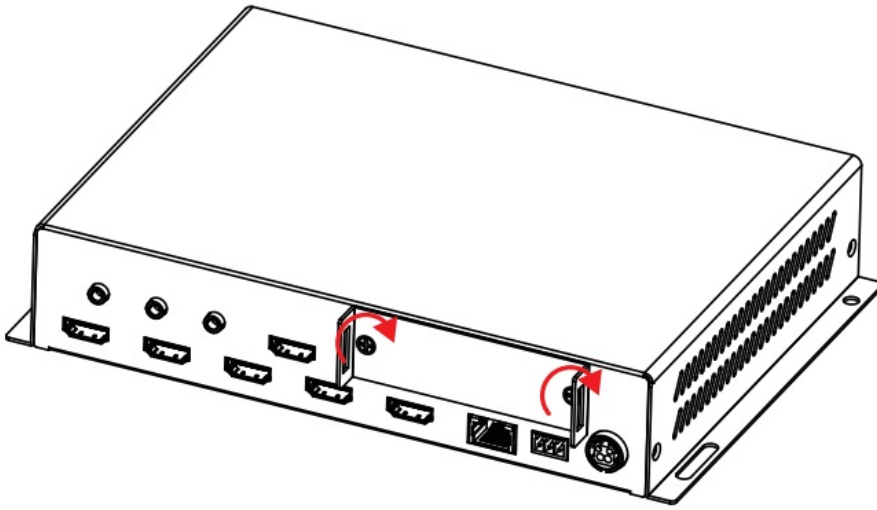

4. Cover the module slot with a dummy faceplate and tighten it in place using appropriate screws.
5. The unit may now be powered back on.

CONNECTION DIAGRAM

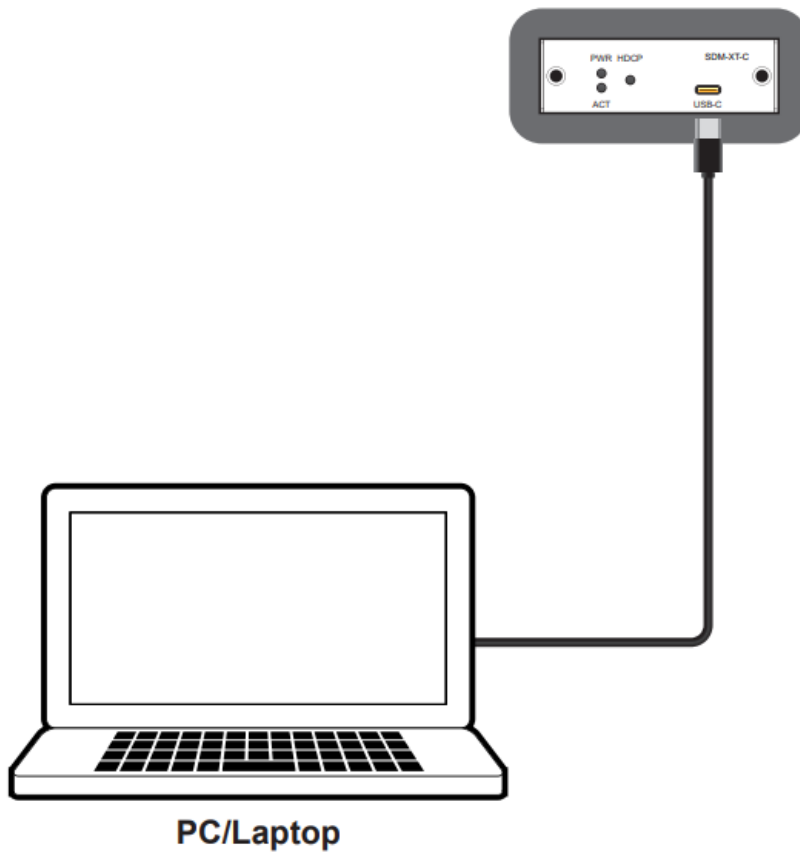

SPECIFICATIONS

Technical Specifications

USB-C Bandwidth: 5Gbps

Card Slot Format: 1×CYP Module (Edge Connector)

Output Ports: 1×USB 3.2 (Type-C)

Power Supply: Provided via Module Slot Connection

ESD Protection (HBM): ±8kV (Air Discharge) ±4kV (Contact Discharge)

Dimensions (W×H×D): 82mm×25mm×111mm [Case Only] 82mm×25mm×122mm [All Inclusive] **Weight:** 55g

Chassis Material (Face): Metal (Steel)

Chassis Colour: Black

Operating Temperature: 0°C – 40°C/32°F – 104°F
Storage Temperature: -20°C – 60°C/-4°F – 140°F
Relative Humidity: 20 – 90% RH (Non-condensing)
Power Consumption: 7.854W

Video Specifications

Supported Resolutions (Hz)	Input	Output
	Card Slot	USB-C
720×400p@70/85	?	?
640×480p@60/72/75/85	?	60
720×480i@60	?	?
720×480p@60	?	?
720×576i@50	?	?
720×576p@50	?	?
800×600p@56/60/72/75/85	?	60
848×480p@60	?	?
1024×768p@60/70/75/85	?	60
1152×864p@75	?	?
1280×720p@50/60	?	?
1280×768p@60/75/85	60/75	?
1280×800p@60/75/85	60	?
1280×960p@60/85	?	?
1280×1024p@60/75/85	?	?
1360×768p@60	?	?
1366×768p@60	?	?
1400×1050p@60	?	?
1440×900p@60/75	?	?
1600×900p@60RB	?	?
1600×1200p@60	?	?
1680×1050p@60	?	?
1920×1080i@50/60	?	?

Supported Resolutions (Hz)	Input	Output
	Card Slot	USB-C
1920×1080p@24/25/30	?	25/30
1920×1080p@50/60	?	?
1920×1200p@60RB	?	?
2560×1440p@60RB	?	?
2560×1600p@60RB	?	?
2048×1080p@24/25/30	?	?
2048×1080p@50/60	?	?
3840×2160p@24/25/30	?	30
3840×2160p@50/60 (4:2:0)	?	?
3840×2160p@24, HDR10	?	?
3840×2160p@50/60 (4:2:0),HDR10	?	?
3840×2160p@50/60	?	?
4096×2160p@24/25/30	?	?
4096×2160p@50/60 (4:2:0)	?	?
4096×2160p@24, HDR10	?	?
4096×2160p@50/60 (4:2:0),HDR10	?	?
4096×2160p@50/60	?	?

Audio Specifications

Digital Audio

Card Slot Input / USB-C Output	
LPCM	
Max Channels	2 Channels
Sampling Rate (kHz)	48
Bitstream	
Supported Formats	None

Cable Specifications

Cable Length	HD	FHD	4K UHD	4K UHD ⁺	8K UHD
USB-C Cable					
USB-C Output	2m			?	

Bandwidth Category Examples:

- **HD Video**

- 720p@60Hz
- HDMI transmission rates lower than 3Gbps
- HD-SDI (SMPTE 292M, 1.485Gbps)

- **FHD Video**

- 1080p@60Hz
- HDMI transmission rates between 3Gbps and 5.3Gbps
- 3G-SDI (SMPTE 424M, 2.970Gbps)

- **4K UHD Video**

- 4K@24/25/30Hz (8-bit colour) & 4K@50/60Hz (4:2:0, 8-bit colour)
- HDMI transmission rates between 5.3Gbps and 10.2Gbps
- 6G-SDI (SMPTE ST 2081, 6Gbps)

- **4K UHD+ Video**

- 1080p@120Hz (10/12-bit HDR)
- 4K@50/60Hz (4:4:4, 8-bit) & 4K@50/60Hz (4:2:0, 10/12-bit HDR)
- HDMI transmission rates between 10.2Gbps and 18Gbps
- 12G-SDI (SMPTE ST 2082, 12Gbps)

- **8K UHD Video**

- 4K@120Hz (10/12-bit HDR)
- 8K@24/25/30Hz (10/12-bit HDR) & 8K@50/60Hz (4:2:0, 8-bit colour)
- HDMI transmission rates between 18Gbps and 48Gbps
- 24G-SDI (SMPTE ST 2083, 24Gbps)

ACRONYMS

ACRONYM	COMPLETE TERM
4K UHD	4K Ultra-High-Definition (10.2Gbps max)
4K UHD+	4K Ultra-High-Definition (18Gbps max)
8K UHD	8K Ultra-High-Definition (48Gbps max, without DSC)
8K UHD+	8K Ultra-High-Definition (48Gbps max, with DSC)
GbE	Gigabit Ethernet
Gbps	Gigabits per second
HDMI	High-Definition Multimedia Interface
HDR	High Dynamic Range
kHz	Kilohertz
LED	Light-Emitting Diode
LPCM	Linear Pulse-Code Modulation
MHz	Megahertz
SNR	Signal-to-Noise Ratio
THD+N	Total Harmonic Distortion plus Noise
TMDs	Transition-Minimized Differential Signaling
UAC	USB Audio Class
USB	Universal Serial Bus
UVC	USB Video Class
VGA	Video Graphics Array
WUXGA (RB)	Widescreen Ultra Extended Graphics Array (Reduced Blanking)
XGA	Extended Graphics Array
Ω	Ohm

CYP (UK) Ltd., Unit 7, Shepperton Business Park, Godet Avenue, Shepperton, Middlesex, TW17 8BA


Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: sales@cypeurope.com

www.cypeurope.com

RDV1



	<p>CYP SDM-XT-C 4K30 USB-C Video Capture Module Card [pdf] User Manual</p> <p>SDM-XT-C 4K30 USB-C Video Capture Module Card, SDM-XT-C, 4K30 USB-C Video Capture Module Card, USB-C Video Capture Module Card, Video Capture Module Card, Capture Module Card, Module Card, Card</p>
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.