

D-Link DES-1024D Ethernet Switch



D-Link DES-1024D 24-Port 10-100 Ethernet Switch User Guide

[Home](#) » [D-Link](#) » D-Link DES-1024D 24-Port 10-100 Ethernet Switch User Guide 

Contents

- [1 D-Link DES-1024D 24-Port 10-100 Ethernet Switch](#)
- [2 INTRODUCTION](#)
- [3 Switching Technology](#)
- [4 Features](#)
- [5 UNPACKING AND SETUP](#)
- [6 Setup](#)
- [7 Desktop Installation](#)
- [8 Rack Mounting](#)
- [9 IDENTIFYING EXTERNAL COMPONENTS](#)
 - [9.1 Rear Panel](#)
 - [9.2 TECHNICAL SPECIFICATIONS](#)
 - [9.3 FAQs](#)
- [10 Related Posts](#)

D-Link

D-Link DES-1024D 24-Port 10-100 Ethernet Switch



ABOUT THIS GUIDE

Congratulations on your purchase of the DES-1024D 24-port 10/100Mbps Fast Ethernet Switch. This device integrates 100Mbps Fast Ethernet and 10Mbps Ethernet network capabilities into one highly flexible solution.

Purpose

This guide discusses how to install your DES-1024D.

Terms/Usage

In this guide, the term “Switch” (first letter upper case) refers to your 24-port 10/100Mbps Fast Ethernet Switch, and “switch” (first letter lower case) refers to other Ethernet switches.

INTRODUCTION

This chapter describes the features of the DES-1024D and some background information about Ethernet/Fast Ethernet switching technology.

Fast Ethernet Technology

Ethernet, along with its speedier counterpart Fast Ethernet, is the most popular networking standard in use today. 100BaseT Fast Ethernet is an extension of the 10BaseT Ethernet standard, designed to raise the data transmission capacity of 10BaseT from 10Mbps/sec to 100Mbps/sec. An important strategy incorporated by 100BaseT is its use of the Carrier Sense Multiple Access with Collision Detection (CSMA/CD) protocol – which is the same protocol that 10BaseT uses – because of its ability to work with several different types of cable, including basic twisted-pair wiring.

Both of these features play an important role in network considerations, and they make 100BaseT an attractive migration path for those networks based on 10BaseT. Since the 100Mbps Fast Ethernet is compatible with all other 10Mbps Ethernet environments, it provides a straightforward upgrade and takes advantage of the existing investment in hardware, software, and personnel training.

Switching Technology

Switching is a cost-effective way of increasing the total network capacity available to users on a LAN. If an Ethernet network begins to display symptoms of congestion, low throughput, slow response times, and high rates of collision, installing a switch to an network can preserve much or all of the existing network’s cabling and workstation interface card infrastructure while still greatly enhancing the throughput for users. A switch is a viable solution even if demanding applications, such as multimedia production and video conferencing, are on the horizon.

The most promising techniques, as well as the best return on investment, could well consist of installing the right mixture of Ethernet switches. A switch increases capacity and decreases network loading by dividing a local area network into different LAN segments. Dividing a LAN into multiple segments is one of the most common ways of increasing available bandwidth. If segmented correctly, most network traffic will remain within a single segment, enjoying the full-line speed bandwidth of that segment.

Switches provide full-line speed, dedicated to bandwidth for all connections. This is in contrast to the hubs, which use the traditional shared networking topology, where the connected nodes contend for the same network bandwidth. When two switching nodes are communicating, they are connected with a dedicated channel between them, so there is no contention for network bandwidth with other nodes. As a result, the switch reduces considerably the likelihood of traffic congestion.

For Fast Ethernet networks, a switch is an effective way of eliminating the problem of chaining hubs beyond the “two-repeater limit.” A switch can be used to split parts of the network into different collision domains, making it possible to expand your Fast Ethernet network beyond the 205-meter network diameter limit for 100BASE-TX

networks. Switches supporting both traditional 10Mbps Ethernet and 100Mbps Fast Ethernet are also ideal for bridging between the existing 10Mbps networks and the new 100Mbps networks.

Switching LAN technology is a marked improvement over the previous generation of network hubs and bridges, which were characterized by higher latencies. Routers have also been used to segment local area networks, but the cost of a router, the setup and maintenance required make routers relatively impractical. Today switches are an ideal solution to most kinds of local area network congestion problems.

Features

The DES-1024D is a high-performance switch designed specifically for environments where traffic on the network and the number of users increase continuously.

- 24-port 10/100BASE Ethernet Switch with RJ-45 connectors
- Supports Auto-negotiation of speed and duplex modes for each port
- Supports Auto-MDI/MDI-X on each port, eliminating the need for cross-over cables or uplink ports
- Wire-speed reception and transmission
- Store-and-Forward switching method
- Integrated address Look-Up Engine, supports 8K MAC addresses
- Supports 2.5Mbits RAM for data buffering
- Front-panel diagnostic LEDs
- Broadcast storm protection
- IEEE 802.3x flow control for full-duplex
- Back pressure flow control for half-duplex

UNPACKING AND SETUP

Unpacking

Open the shipping cartons of the DES-1024D and carefully unpack its contents. The carton should contain the following items:

- One DES-1024D 24-port 10/100Mbps Fast Ethernet Switch One AC power cord
- Four rubber feet to be used for shock cushioning
- Screws and two mounting brackets
- Quick Installation Guide
- Manual

If any item is found missing or damaged, please contact your local reseller for replacement.

Setup


The setup of the DES-1024D can be performed by using the following steps:

1. The surface must support at least 11 lbs (5 kg).
2. The power outlet should be within 6 feet (1.42 meters) of the device.
3. Visually inspect the power cord and see that it is secured fully to the AC power outlet.

4. Make sure that there is adequate ventilation around the Switch.
5. Do not place heavy objects on the Switch.

Desktop Installation


When installing the DES-1024D on a desktop or shelf, the rubber feet included with the device should be attached first, to minimize scratching or scarring of the surface on which the Switch is placed. Attach these cushioning feet on the bottom at each corner of the device. Allow enough ventilation space between the device and the objects around it.

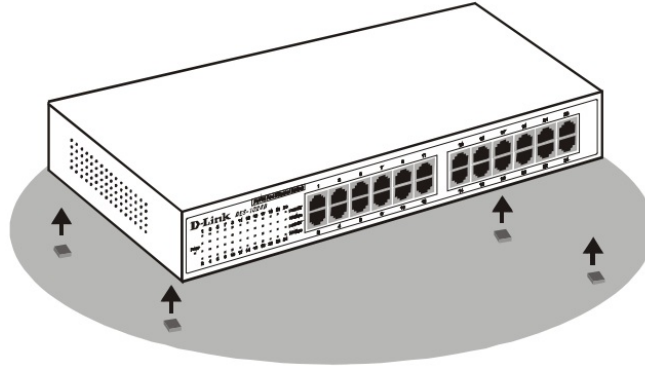


Fast Ethernet Switch installed on a Desktop or Shelf

Rack Mounting

The DES-1024D can be mounted in an EIA standard-size 19-inch rack, in a wiring closet with other equipment. Attach the mounting brackets on each side of the Switch's front panel (as shown in the illustration below), and secure them with the screws provided.

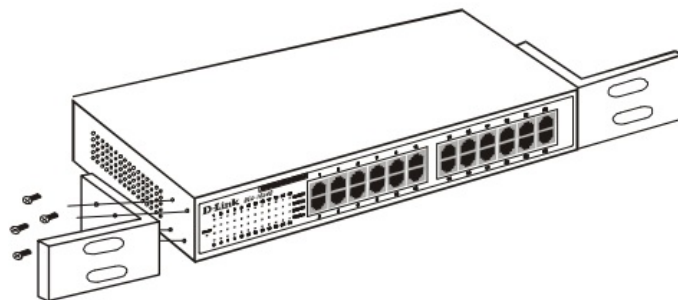

Attaching the mounting brackets to the Switch

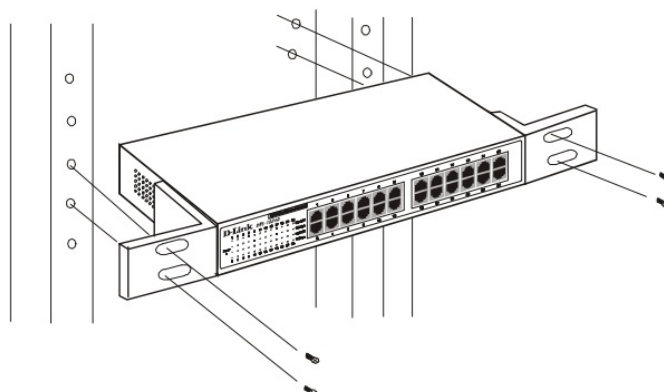


Installing the Switch in an equipment rack

IDENTIFYING EXTERNAL COMPONENTS

Front Panel

The figure below shows the front panels of the switch.

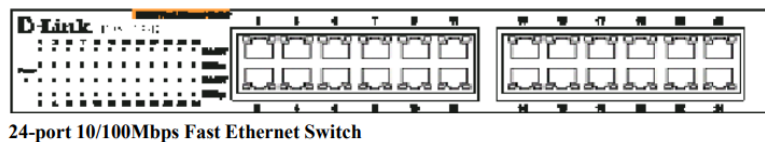


24-port 10/100Mbps Fast Ethernet Switch

24-port 10/100Mbps Fast Ethernet Switch

LED Indicator Panel

Refer to the next chapter for detailed information about each of the switch's LED indicators.

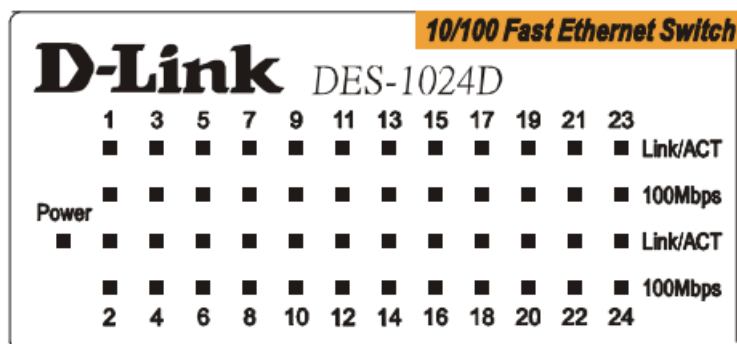

- **Power (PWR)**

This green LED indicator illuminates when the switch is receiving power; otherwise, it is off.

- **Link / Activity**

This green LED indicator illuminates when the port is connected to a Fast Ethernet or Ethernet station; the indicator blinks when transmitting or receiving data.

- **100Mbps (green)**

This green LED indicator illuminates when the port is connected to a 100Mbps Fast Ethernet station. The LED does not illuminate when the port is connected to 10Mbps Ethernet station.

Twisted-Pair Ports

These ports support automatic MDI/MDIX crossover detection function providing true 'plug and play' connectivity, which eliminates the need for crossover cables or uplink ports. Any port can be simply plugged to a server, workstation, or hub using the usual straight-through, twisted-pair cable.

Rear Panel



AC Power Connector

TECHNICAL SPECIFICATIONS

General	
Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet
Protocol	CSMA/CD
Data Transfer Rate	Ethernet: 10Mbps (half duplex), 20Mbps (full-duplex) Fast Ethernet: 100Mbps (half duplex), 200Mbps (full- duplex)
Topology	Star
Network Cables	10BASE-T: 2-pair UTP Cat. 3,4,5, EIA/TIA- 568 100-ohm STP 100BASE-TX: 2-pair UTP Cat. 5, EIA/TIA-568 100-ohm STP
Number of Ports	24 x 10/100Mbps Auto-MDI ports
Physical and Environmental	
AC inputs	100 to 240 VAC, 50 or 60 Hz internal universal power supply
Power Consumption	8.25 watts. (max.)
Temperature	Operating: 0° ~ 40° C (32° to 104° F), Storage: -10° ~ 70° C (14° to 158° F)
Humidity	Operating: 10% ~ 90%, Storage: 5% ~ 90%
Dimensions	Width: 11.02 in. (280mm) Depth: 7.09 in. (180mm) Height: 1.73 in. (44mm)
EMI:	FCC Class A, CE Mark Class A, VCCI Class A
Safety	CUL, CB

Performance	
Transmits Method:	Store-and-forward
RAM Buffer:	2.5Mbits per device
Filtering Address Table:	8K entries per device
Packet Filtering/ Forwarding Rate:	10Mbps Ethernet: 14,880/pps 100Mbps Fast Ethernet: 148,800/pps
MAC Addresses Learning:	Automatic update

FAQs

What is the D-Link DES-1024D Ethernet Switch?

The D-Link DES-1024D is a 24-port Ethernet switch designed to provide high-speed network connectivity for both home and small business users.

What is the purpose of an Ethernet switch?

An Ethernet switch is used to connect multiple devices to a local area network (LAN) and facilitate data communication between them, offering high-speed data transfer.

What type of Ethernet ports does the DES-1024D have?

The DES-1024D features 24 10/100 Mbps Ethernet ports, suitable for connecting a variety of devices, including computers, printers, and more.

Is the D-Link DES-1024D a managed or unmanaged switch?

The DES-1024D is an unmanaged switch, making it simple to set up and use without the need for advanced configuration.

Can the switch be mounted on a rack or used on a desktop?

The switch is designed for desktop use but can be rack-mounted with an optional rack-mounting kit for added flexibility.

What is the maximum data transfer rate supported by the DES-1024D?

The switch supports a maximum data transfer rate of 10/100 Mbps, making it suitable for standard Ethernet and Fast Ethernet connections.

Is the DES-1024D suitable for home or business use?

The DES-1024D is suitable for both home and small business environments, providing reliable network connectivity.

Does the switch support any advanced features like VLANs or QoS?

This is a basic unmanaged switch and does not support advanced features like VLANs or Quality of Service (QoS).

Is the D-Link DES-1024D energy-efficient?

The switch is designed to be energy-efficient, helping to conserve power when not in use or when connected devices are turned off.

Can the DES-1024D be daisy-chained with other switches?

Yes, you can daisy-chain multiple DES-1024D switches together to expand the number of available ports on your network.

What is the warranty for the D-Link DES-1024D Ethernet Switch?

The D-Link DES-1024D Ethernet Switch typically comes with a warranty of Limited Lifetime from the date of purchase.

Is it possible to set up VLANs on this switch?

No, the DES-1024D is an unmanaged switch and does not support Virtual LANs (VLANs).

References: [D-Link DES-1024D 24-Port 10-100 Ethernet Switch – Device.report](#)