


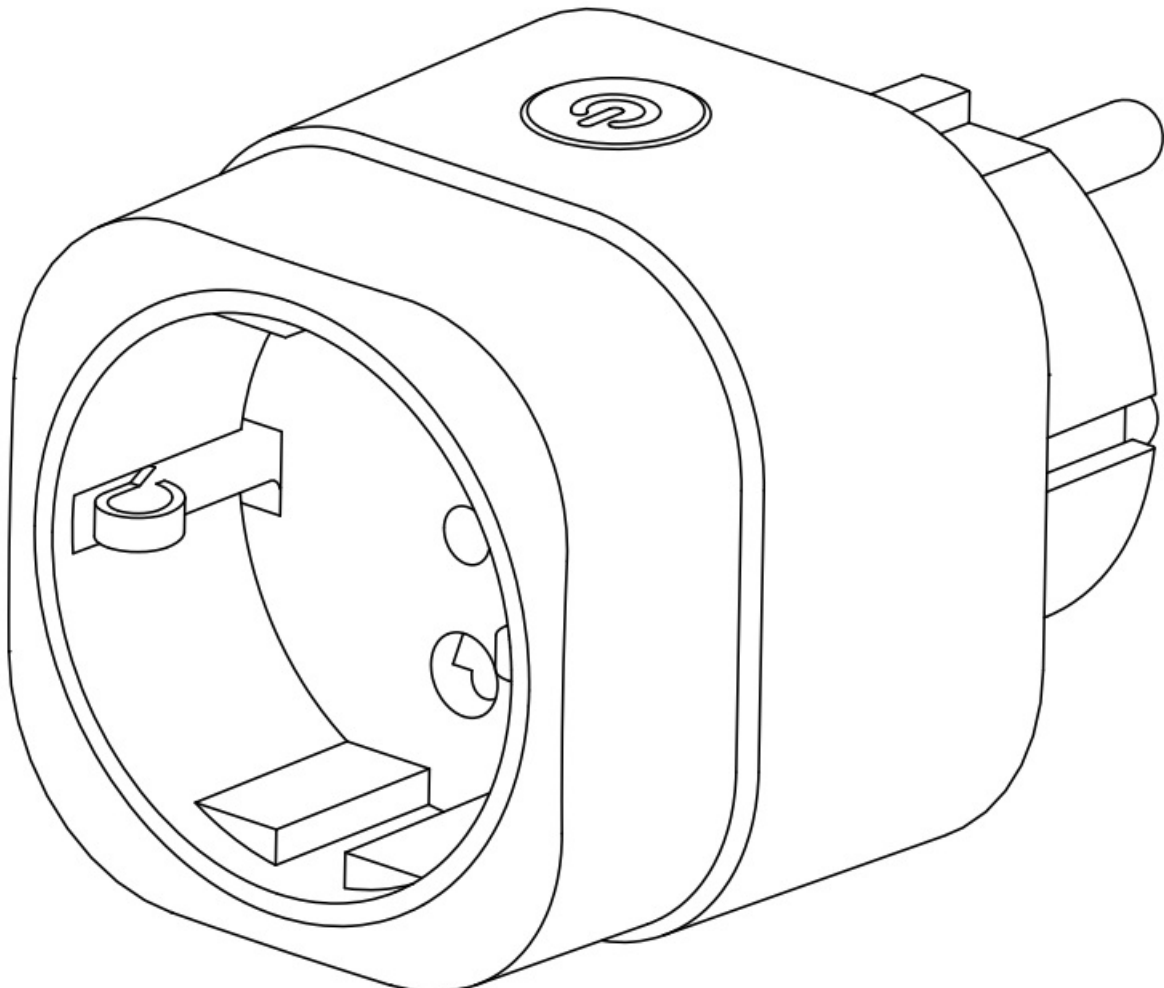


D-Link DSPH1 V1.3 Wireless Smart Plug User Manual

[Home](#) » [D-Link](#) » D-Link DSPH1 V1.3 Wireless Smart Plug User Manual 

D-Link

The User Manual of
Wireless Smart Plug



* We offer Smart Plug in global standards like CEE, GB, SAA, etc. CEE standard is used for reference only in this

Contents

[1 Features](#)

[2 Parameters](#)

[3 Appearance](#)

[4 Pairing With Main Panel by App](#)

[5 Documents / Resources](#)

Features

The smart plug is an accessory of smart alarm system.


It is easy and reliable to use with elegant design and RF supervision. The smart plug can be controlled remotely by App.

By the “Smart Following” feature of the system, the smart plug can also be automatically turned ON/OFF according to system events, or by Timed Task.

Parameters

• Power Rating	MAX2200W
• Rated Input	AC 110V-240V/50-60Hz/MAX10A
• Rated Output	AC 110V-240V/50-60Hz/MAX10A
• Distance	Up to 300m without obstacle
• Transmission Frequency	433.92MHz / 868.35MHz
• Working Temperature	-10 °C ~50 °C
• Humidity	≤90%rh (non-condensing)
• Weight	76.5g
• Dimension	50x50x82.8 mm LxWxH(±0.1mm)

Appearance

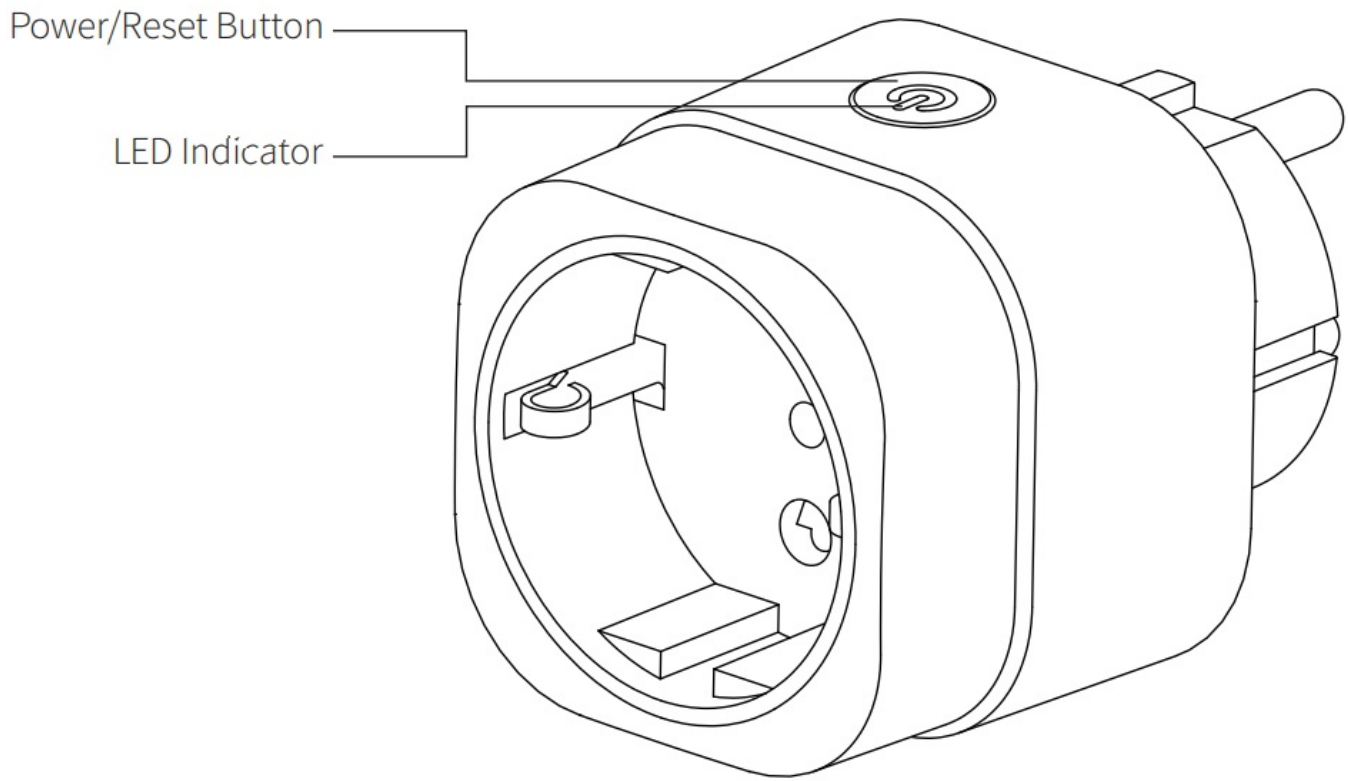

Pairing With Main Panel by App

1. Make sure your Smart Plug is plugged into the outlet. Check the LED indicator if it is flashing. If not, press the power button until the LED indicator is flashing.
2. Launch App. Scan the QR Code on the smart plug. Finish the rest parts like renaming, etc.
3. PRESS [SAVE] on App. The pairing would be finished when the LED indicator stops flashing. The system will inform you the pairing result by APP.


Hint: The main panel and the smart plug should be ON during the whole pairing process.

Use The Smart Plug

1. Turn ON/OFF
You can easily turn it ON/OFF in the APP: by tapping buttons in the Smart Plug section or in the APP dashboard, or press the button on the smart plug for 0.5s directly.
2. Setup "Smart Following" or "Time Task"
Smart plug can be automatically turned ON/OFF according to the system events, like ARM/DISARM/ALARM/TRIGGERED/TIME SCHEDULE etc. Users can easily setup this feature in the Smart Widget section of the App.
3. Reset The Smart Switch
Press the reset button for 10 seconds, the smart switch will be reset and the LED indicator starts to flash.



Documents / Resources

 The User Manual of Wireless Smart Plug CE mark	D-Link DSPH1 V1.3 Wireless Smart Plug [pdf] User Manual DSPH1 V1.3 Wireless Smart Plug, DSPH1, V1.3 Wireless Smart Plug, Wireless Smart Plug, Smart Plug, Plug
---	---

Manuals+.