

Xiaomi P15ZM

Xiaomi Pocket Power Bank 10000mAh User Manual

Model: P15ZM

1. INTRODUCTION

This user manual provides comprehensive instructions for the safe and efficient operation of your Xiaomi Pocket Power Bank 10000mAh. Please read this manual thoroughly before using the product and retain it for future reference.



Image 1.1: The Xiaomi Pocket Power Bank 10000mAh, showcasing its compact size when held in hand.

2. SAFETY INFORMATION

To ensure safe operation and prevent damage, observe the following precautions:

- Do not disassemble, repair, or modify the power bank.
- Do not expose the power bank to fire, high temperatures (above 45°C), or direct sunlight.
- Avoid dropping, impacting, or subjecting the power bank to strong vibrations.
- Keep the power bank away from water, moisture, and corrosive substances.
- Use only certified charging cables and adapters.
- Keep out of reach of children.
- Dispose of the power bank responsibly according to local regulations.

12-layer safety



Overheat protection
(Ideal temperature: 0-35°C)



Short-circuit protection



Reset protection



Input overvoltage protection



Input overcurrent protection



Output overcurrent protection



Output overvoltage protection



Overcharge & overdischarge protection



Overcurrent & short-circuit protection



Metal foreign object detection



Electrostatic Protection



Chip Thermal Shutdown

Image 2.1: The power bank incorporates 12-layer safety protection, including overheat, short-circuit, and overcharge protection.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- Xiaomi Pocket Power Bank 10000mAh (with built-in USB-C cable)
- User Manual

4. PRODUCT OVERVIEW

Familiarize yourself with the components of your power bank:

Multi-port Access

Built-in Type-C cable

USB-A port


Type-C port



Image 4.1: Overview of the power bank's ports and indicators.

- **Built-in USB-C Cable:** For convenient charging and recharging without extra cables.
- **USB-A Output Port:** Standard USB port for charging devices.
- **USB-C Input/Output Port:** Versatile port for both charging devices and recharging the power bank.
- **Power Button/Battery Indicator:** Press once to check battery level. Double-tap to activate low-power mode.
- **LED Indicators:** Four LEDs indicate the remaining battery capacity.

10000mAh High-density Lithium-ion Battery

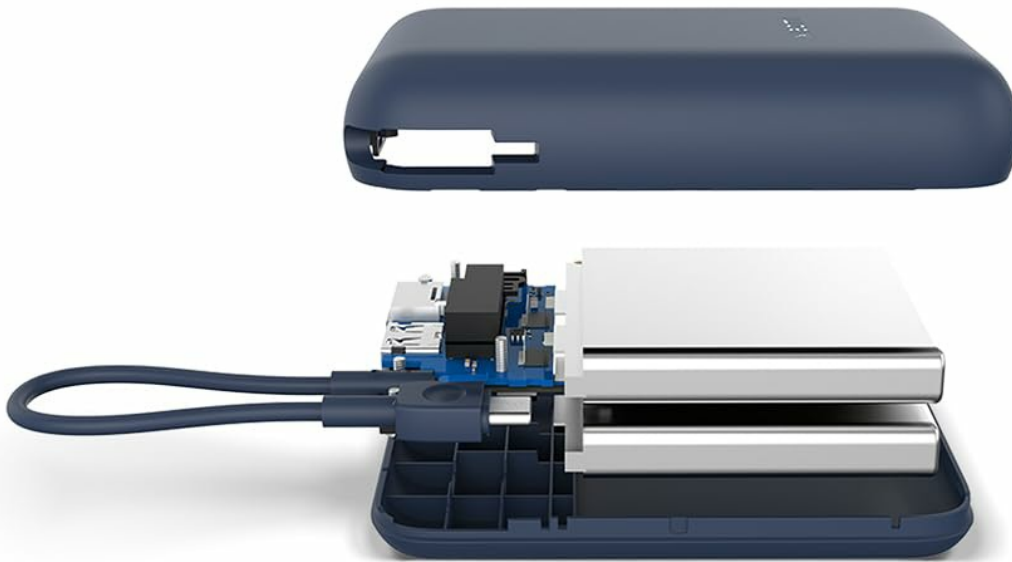

1.4 Times
charges
Xiaomi 14

1.76 Times
charges
Xiaomi 13 Pro

2.6 Times
charges
iPhone 15 Pro

Image 4.2: The durable built-in Type-C cable, designed for convenience.

5. SETUP

Before first use, it is recommended to fully charge your power bank.

5.1 Initial Charging of the Power Bank

1. Connect the built-in USB-C cable or an external USB-C cable to the power bank's USB-C input/output port.
2. Connect the other end of the cable to a compatible USB wall charger (not included).
3. The LED indicators will light up to show the charging progress. All four LEDs will be solid when fully charged.

A full charge typically takes approximately 3.5 hours with a 22.5W fast charger.

6. OPERATING INSTRUCTIONS

6.1 Charging Devices

The power bank supports charging up to three devices simultaneously.

1. Connect your device to the power bank using one of the following methods:
 - Use the built-in USB-C cable.
 - Connect a USB-A to your device's cable to the USB-A output port.
 - Connect a USB-C to your device's cable to the USB-C input/output port.
2. The power bank will automatically begin charging your device. If not, press the power button once.

Two-way fast charge

22.5W Type-C input and output

Fast-charge 22.5W
Input and Output



Fast-charge 22.5W
Input and Output

Power Delivery | Quick Charge 3.0

Image 6.1: The power bank can charge multiple devices simultaneously using its various ports.

6.2 Recharging the Power Bank

To recharge the power bank, follow the steps in Section 5.1.

6.3 Low-Power Mode for Small Devices

For charging low-current devices such as Bluetooth earbuds, smartwatches, or fitness bands, activate the low-power mode:

1. Ensure no devices are connected or disconnect them.
2. Double-tap the power button. The LED indicators will flash sequentially to indicate low-power mode is active.
3. Connect your low-current device. The power bank will provide a stable low-current output.
4. To exit low-power mode, double-tap the power button again, or simply connect a standard device.

Low Power Discharge Mode

Charge your ecosystem devices such as SmartWatches/Bands, earbuds/Neckbands, and any other smart device.



Double-tap
to enable

Image 6.2: Low-power mode is ideal for charging small electronic devices like smartwatches and earbuds.

7. MAINTENANCE

Proper maintenance ensures the longevity of your power bank:

- **Cleaning:** Use a soft, dry cloth to clean the surface of the power bank. Do not use liquid cleaners or abrasive materials.
- **Storage:** Store the power bank in a cool, dry place away from direct sunlight and extreme temperatures. If storing for extended periods, charge it to approximately 50% every three months to preserve battery health.
- **Cable Care:** Avoid excessive bending or pulling of the built-in cable to prevent damage.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Power bank not charging devices.	Low battery; cable issue; device incompatibility.	Recharge power bank; try a different cable; ensure device is compatible.
Power bank not recharging.	Faulty charger/cable; power bank issue.	Try a different charger and cable; contact support if issue persists.
Slow charging.	Non-fast charging cable/adaptor; device not supporting fast charge.	Use a fast-charging compatible cable and adaptor; check device's charging specifications.
LED indicators not working.	Power bank is off or completely discharged; internal fault.	Press power button; recharge power bank; contact support.

9. SPECIFICATIONS

Feature	Detail
Model Number	P15ZM
Battery Capacity	10000 mAh
Input (Type-C)	22.5W Max (Two-way fast charging)
Output (Built-in Type-C, USB-A, Type-C)	22.5W Max (Power Delivery, Quick Charge 3.0)
Dimensions	33 x 18.4 x 3.7 cm (Package)
Weight	230 g
Battery Type	Lithium Ion
Safety Features	12-layer protection (Overheat, Short-circuit, Overcharge, etc.)
Color	Blue

Built-in Type-C Cable

22.5W Fast Charge



Xiaomi 14
50% Charge in
32 mins

Xiaomi 13 Pro
50% Charge in
34 mins

iPhone 15 Pro
50% Charge in
35 mins

Image 9.1: Fast charging capabilities, showing approximate charge times for various devices.


10. WARRANTY AND SUPPORT

Your Xiaomi Pocket Power Bank 10000mAh comes with a **1-year manufacturer warranty** from the date of purchase. For warranty claims, technical support, or any product-related inquiries, please contact Xiaomi customer service:

- **Manufacturer:** TOPBAND India Pvt Limited, Khed, Khalumbre Pune 410501, India
- **Importer:** Xiaomi Technology India Pvt Ltd, Ground Floor, AKR Infinity, SY, No 113, Krishna Reddy Industrial area, 7th Mile, Hosur Road, Bangalore 560068, Karnataka, India
- **Phone No:** 1800 103 6286 (Available from 9 AM to 9 PM)
- **Email:** Service.in@xiaomi.com

Please retain your purchase receipt as proof of purchase for warranty purposes.

Documents - Xiaomi – P15ZM

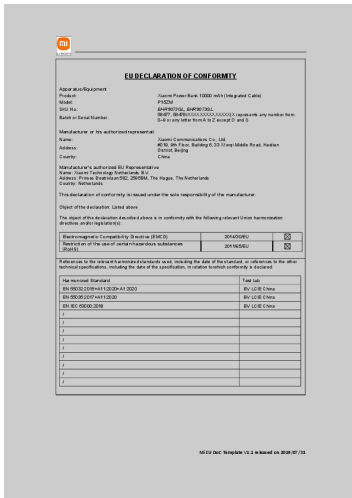

[\[pdf\]](#) Specifications Declaration of Conformity


Microsoft Word Xiaomi Power Bank 10000 mAh Integrated Cable P15ZM EU DoC Total Stáhnout manuál 10 000 CableBeryko cz58477 POS Cableberyko cz tmp manuals attachment 58477 |||

EU DECLARATION OF CONFORMITY Apparatus/Equipment Product: Model: SKU

No.: Batch or Serial Number: Xiaomi Power Bank 10000 mAh Integrated Cable

P15ZM BHR9072GL, BHR9073GL 58477, 58478/XXXXXXXXXXXXX X represents any number from 09 or any letter from A to Z except O and I Manufacturer or his aut...


lang:en score:37 filesize: 693.2 K page_count: 6 document date: 2024-11-06

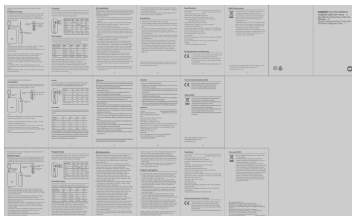

[Xiaomi 10000mAh Power Bank with Integrated Cable User Manual](#)

Comprehensive user manual for the Xiaomi 10000mAh Power Bank featuring an integrated cable, covering product overview, safety precautions, charging and discharging instructions, specifications, and warranty information.

lang:id score:35 filesize: 2.67 M page_count: 2 document date: 2025-05-16

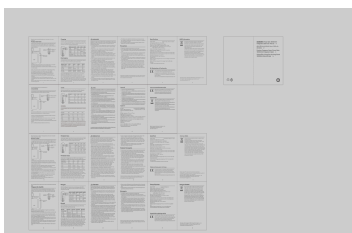

[\[pdf\]](#) User Manual Guide


58615 58526 10000mAh P15ZM V1 2 20240613 Xiaomi Việt Nam Power Bank 10000mAh Integrated Cable UserGuide TH xiaomi b2c i18n upload azams0 mi fds User Guide Upload Digital 3C |||

Read this manual carefully before use, and retain it for futur reference. Product

Overview Thank you USB Xiaomi 2550 : **P15ZM** : : USB-C/ USB-C : 10000 mAh

3.7 V 37 Wh : USB-A/USB-C/ USB-C : USB-C IN1 ...

lang:id score:34 filesize: 2.44 M page_count: 1 document date: 2025-04-02

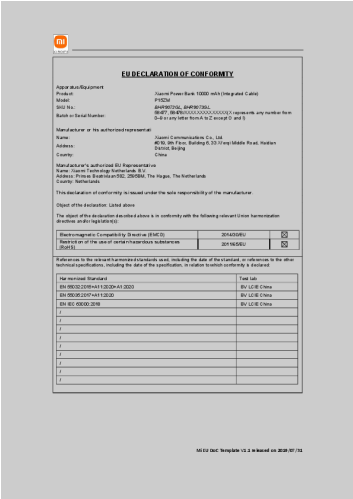

[pdf] Specifications Declaration of Conformity

Microsoft Word Xiaomi Power Bank 10000 mAh Integrated Cable P15ZM EU DoC Total Europe
DECLARATION OF CONFORMITY Global XiaomiPowerBank10000mAh CableP15ZM ce doc alsqp0 mi
fds |||
EU DECLARATION OF CONFORMITY Apparatus/Equipment Product: Model: SKU
No.: Batch or Serial Number: Xiaomi Power Bank 10000 mAh Integrated Cable
P15ZM BHR9072GL, BHR9073GL 58477, 58478/XXXXXXXXXXXXXXX X represents
any number from 09 or any letter from A to Z except O and I Manufacturer or his aut...
lang:en score:32 filesize: 1000.27 K page_count: 38 document date: 2024-06-13




[pdf] User Manual

58477 Xiaomi Power Bank 10000mAh Integrated Cable Stáhnout manuál 10 000 mAh ENBeryko cz58477
user manual enberyko cz tmp manuals attachment en |||
Power Bank 10000mAh Integrated Cable User Manual Read this manual carefully
before use, and reta ... only. Actual product and functions may vary due to product
enhancements. 4 Specifications Model: **P15ZM** Battery Type: Lithium-ion battery Cell
Capacity: 10000 mAh 3.7 V 37 Wh Input Port: USB-C/In...
lang:en score:30 filesize: 986 K page_count: 8 document date: 2024-11-04



[pdf] User Manual

58477 Xiaomi Power Bank 10000mAh Integrated Cable Stáhnout manuál 10 000 mAh CableBeryko
cz58477 user manual czberyko cz tmp manuals attachment |||
Power Bank 10000mAh Integrated Cable Uživatelsk prucka Ped použitm si pecliv
pectte tuto uzivate Skutecn produkt a jeho funkce se mohou lisit v dsledku
vylepsen produktu. 4 Specifikace Model: **P15ZM** Typ baterie: Lithium-iontov baterie
Kapacita clnku: 10000 mAh 3,7 V 37 Wh Vstupn port: USB-...
lang:it score:30 filesize: 2.07 M page_count: 8 document date: 2024-11-05

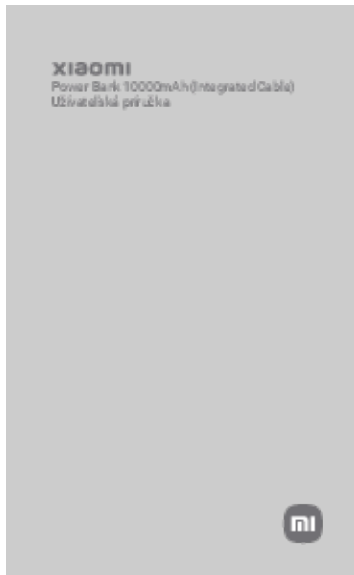

[\[pdf\]](#) User Manual

58477 Xiaomi Power Bank 10000mAh Integrated Cable Stáhnout manuál 10 000 mAh SKBeryko cz58477 user manual skberyko cz tmp manuals attachment sk |||

Power Bank 10000mAh Integrated Cable Uzvatesk prrucka Pred použitím si pozorne prečítajte toto pouz ... y. Skutočný produkt a jeho funkcie sa môžu líšiť v dôsledku vylepšenia produktu. 4. Špecifikácie Model: **P15ZM** Typ batérie: Litium-ionová batéria Kapacita článku: 10000 mAh 3,7 V 37 Wh Vstupný port: USB-C/inte...

lang:it **score:29** filesize: 1.38 M page_count: 8 document date: 2024-11-05




[\[pdf\]](#)

Xiaomi Power Bank 10000mAh Integrated Cable Használati útmutató Ice Blue mstore hu 01da14af32bc1385e7f6cc8e194b4658 xiaomi power bank 10000mah integrated cable custom image data srattached |||

Power Bank 10000mAh Beépített Kábel Felhasználói Kézikönyv - 1 - Olvassa el figyelmesen ezt a kézikönyvet ... gek. A tényleges termék és funkciók a termék fejlesztései miatt elterelhetők. - 5 - Műszaki adatok Modell: **P15ZM** Akkumulátor típusa: Litium-ion akkumulátor Akkumulátor kapacitás: 10000 mAh 3.7 V 37 Wh Bemeneti por...

lang:tl **score:20** filesize: 387.85 K page_count: 8 document date: 2024-10-18

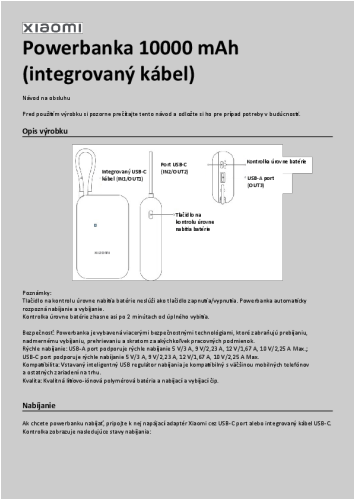


[pdf]

Xiaomi Power Bank 10000 Integrated Cable ENG Index of 2024 09 mi store sk |||

Powerbanka 10000 mAh integrovan kbel Nvod na obsluhu Pred použitm vrobku si pozorne prectajte tent ... dsledku neustleho vylepsovania vrobku sa jeho vzhad a funkcie mzu lsi. Technick parametre Model: **P15ZM** Typ batrie: Ltiovo-inov batria Kapacita batrie: 10 000 mAh, 3,7 V 37 Wh Vstupn port: USB-C/...

lang:it score:19 filesize: 105.58 K page_count: 4 document date: 2024-09-04

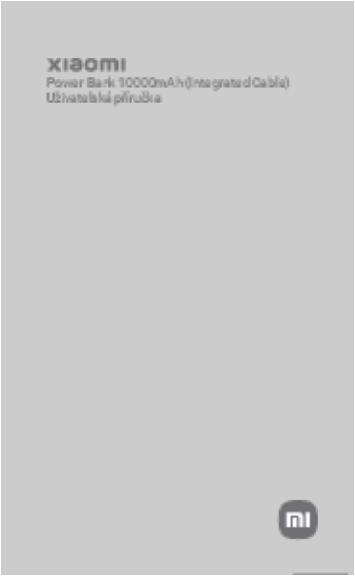

[pdf]

58477 Xiaomi Power Bank 10000mAh Integrated Cable 13 nov 2024 — Bezpečnosť Powerbanka je vybavena niekoľkima ochrannými technológiami ktoré zabráňujú nadmernému nabíjení vybíjení prehriatí a zkratu CZ Návod xm cz data files |||

Power Bank 10000mAh Integrated Cable Uzivatelsk prucka Ped použitm si pecliv pectte tuto uzivate Skutecn produkt a jeho funkce se mohou lisit v dsledku vylepsen produktu. 4 Specifikace Model: **P15ZM** Typ baterie: Lithium-iontov baterie Kapacita clnku: 10000 mAh 3,7 V 37 Wh Vstupn port: USB-...

lang:it score:18 filesize: 2.07 M page_count: 8 document date: 2024-11-05



[pdf]

Power Bank 10000mAh Beépített Kábel Felhasználói KézikönyvPower Kézikönyv Page 2 Akkumulátor kapacitás 10000 mAh 3 7 V 37 Wh Bemeneti port USB C 01da14af32bc1385e7f6cc8e194b4658 xiaomi power bank 10000mah ilntegrated cablemstore hu custom mstore image data srattached 01da14af32bc1385e7f6cc8e194b4658 cable srsltid AfmBOoQKHJJj jNtqLhqQ8nrxqH6OdI04g 1A6zVoN436sRfHNLZ0ir C Power Gyors töltés Az A támogatja a maximum 5 9 23 12 1 67 10 01da14af32bc1385e7f6cc8e194b4658 cable01da14af32bc1385e7f6cc8e194b4658 1A6zVoN436sRfHNLZ0irmstore AfmBOoq61UhN MsAyY3dEVrdYW29qUSZrt8k7beNBRCWgM7cLWKJgEpl ||| ||| Power Bank 10000mAh Beptett Kbel Felhasznli Kziknyv - 1 - Olvassa el gyelmesen ezt a kziknyvet a hasznlat eltt, s rízze meg a ksbbi felhasznls cljbl. Termk tekintse Ksznjik, hogy ezt a nagy kapacits power bankot vlasztotta, amely kivl mi Power Bank 10000mAh Beptett Kbel Felhasznli Kziknyv - 1 - Olvassa el gyelmesen ezt a kziknyve ... gek. A tnyleges termk s funkcik a termk fejlesztsei miatt eltrhetnek. - 5 - Mszaki adatok Modell: **P15ZM** Akkumultor tpusa: Ltium-ion akkumultor Akkumultor kapacits: 10000 mAh 3.7 V 37 Wh Bemeneti por...

lang:tl score:17 filesize: 387.85 K page_count: 8 document date: 2024-10-18